

MOTION CONTROL DRIVES

SINAMICS Converters for Single-Axis Drives


SINAMICS G210 Standard Converters

[siemens.com/d36-3](https://www.siemens.com/d36-3)

Catalog
D 36.3

Edition
August
2026

Next
Generation

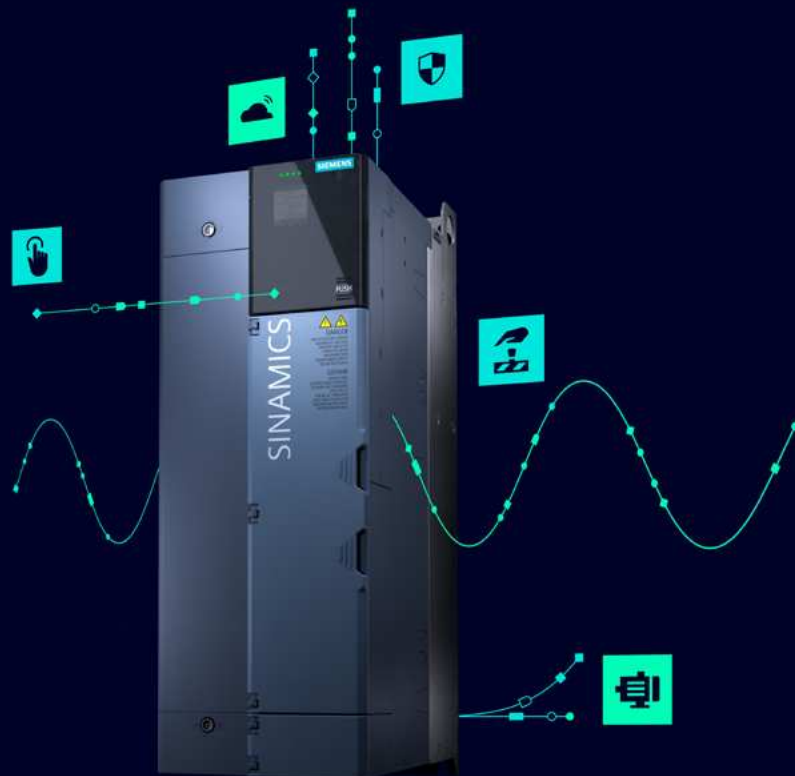

Related catalogs

Motion Control Drives

D 31.1

SINAMICS Converters for Single-Axis Drives
Built-In Units

PDF (E86060-K5531-A111-A5-7600)



SIMOTICS S-1FG1

Servo geared motors

Helical, Parallel shaft, Bevel and
Helical worm geared motors

PDF (E86060-K5541-A101-A6-7600)



Motion Control Drives

D 31.2

SINAMICS Converters for Single-Axis Drives
Distributed Converters

PDF (E86060-K5531-A121-A4-7600)



Motion Control Drives

D 60

SIMOTICS E

Drive system for extra low voltage

PDF (E86060-K5560-A101-A3-7600)



Motion Control Drives

D 31.5

SINAMICS Converters for Single-Axis Drives
SINAMICS G120X infrastructure converters
for HVAC/Water/Wastewater

PDF (E86060-K5531-A151-A5-7600)



Motion Control System

PM 21

SIMOTION

Equipment for Production Machines

PDF (E86060-K4921-A101-A4-7600)



Motion Control Drives

D 32

SINAMICS S210 Servo Drive System

PDF (E86060-K5532-A101-B2-7600)



Industrial Controls

IC 10

SIRIUS

PDF (E86060-K1010-A101-B7-7600)



Motion Control Drives

D 36.1

SINAMICS Converters for Single-Axis Drives
SINAMICS G220 built-in and wall-mounted units

PDF (E86060-K5536-A111-A6-7600)



Low-Voltage Power Distribution and Electrical Installation Technology

LV 10

SENTRON • SIVACON • ALPHA

PDF (E86060-K8280-A101-C1-7600)



Motion Control Drives

D 37.1

SINAMICS S200 Servo drive system

PDF (E86060-K5537-A111-A3-7600)



SIMATIC

ST 70

Products for
Totally Integrated Automation

PDF (E86060-K4670-A101-C1-7600)



SINAMICS S120

D 21.3

Chassis Format Converter Units
Chassis-2 Format Converter Units
Cabinet Modules, Cabinet Modules-2

SINAMICS S150

Converter Cabinet Units
PDF (E86060-K5521-A131-B1-7600)



SIMATIC HMI / PC-based Automation

ST 80/ST PC

Human Machine Interface Systems
PC-based Automation

PDF (E86060-K4680-A101-D3-7600)



Motion Control Drives

D 21.4

SINAMICS S120, SINAMICS S220 and
SIMOTICS

PDF (E86060-K5521-A141-A2-7600)



SITRAIN

Digital Industry Academy

www.siemens.com/sitrain



Motion Control Drives

D 23.1

SINAMICS DCM

series of converters

DC Converter, Control Module

PDF (E86060-K5523-A111-A4-7600)



SiePortal

Information and Ordering Platform
on the Internet

sieportal.siemens.com



Catalog
D 36.3

Edition
August
2026

Next
Generation



Combining the real and digital worlds ...
Transformation

MOTION CONTROL DRIVES

SINAMICS Converters for Single-Axis Drives

SINAMICS G210

Standard Converters

[siemens.com/d36-3](https://www.siemens.com/d36-3)

Dear Customer,

We are happy to present you with the new PDF version of the Catalog D 36.3 · August 2026.

The catalog provides a comprehensive overview of the SINAMICS G210 standard converters. SINAMICS G210 frequency converter is the Versatile All-Rounder of the next generation of SINAMICS portfolio for Diverse Continuous Motion Requirements. It covers a wide range of applications from moving and positioning tasks to processing and compressing applications in industries such as general machinery, consumer packaged goods, life sciences, tire industry and various other industries.

The products listed in this Catalog are also included in SiePortal.

Please contact your local Siemens office for additional information.

Up-to-date information about SINAMICS G210 is available online at www.siemens.com/sinamics-g210

You can access SiePortal on the internet at <https://sieportal.siemens.com>

Your personal contact will be glad to receive your suggestions and recommendations for improvement. You can find your representative in our personal contacts database at www.siemens.com/automation-contact

We hope that you will often enjoy using the new Catalog D 36.3 · August 2026 as a selection and ordering reference document and wish you every success with our products and solutions.

With kind regards

Frank Golüke
Vice President
General Motion Control
Siemens AG, Digital Industries, Motion Control

SINAMICS Converters for Single-Axis Drives

SINAMICS G210 standard converters

Motion Control Drives




Catalog D 36.3 · August 2026

Refer to SiePortal for current updates of this catalog:
<https://sieportal.siemens.com>

Please contact your local Siemens branch.

© Siemens 2026

Click on an Article No. in the catalog PDF to call it up in SiePortal and to obtain all the information.



Or directly on the internet, e.g.
www.siemens.com/product_catalog_DIMC?6SL3070-0AA00-0AG0



The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with EN ISO 9001. The certificate is recognized by all IQNet countries.

System overview

1

SINAMICS G210 standard converters

2

SINAMICS Drive Software

3

Services and documentation

4

Appendix

5



Motion beyond expectations

Drives move the industries. But how can they make them more efficient, more reliable and more sustainable – and exceed all expectations while they are doing it? Our answer: Siemens Xcelerator for Digital Drivetrain.

Digital solutions for Drivetrain Design and Drivetrain Health


With digitalization solutions for Drivetrain Design and Drivetrain Health, you can optimize your drivetrain processes and use data to improve efficiency.

Drivetrain Design:

Simplify and shorten the engineering steps to get faster and more efficiently from concept to the commissioned drivetrain.

Drivetrain Health:

Reduce total cost of ownership for your equipment and machine park – energy, maintenance, downtime.

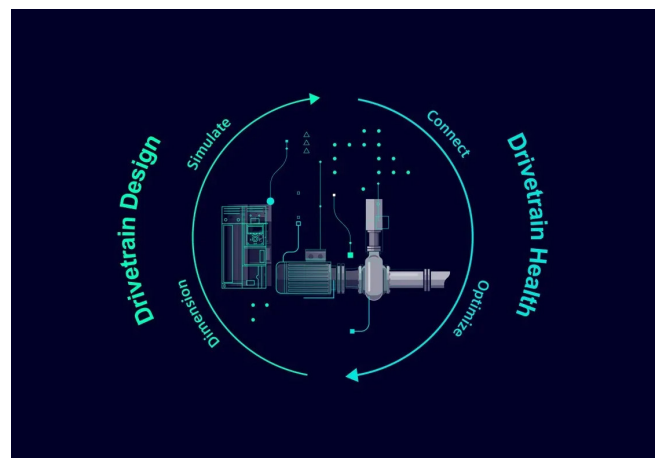

[siemens.com/digital-drivetrain](https://www.siemens.com/digital-drivetrain)

Digitalization along the drivetrain value chain




Dimension

Accurate in motion: Dimension your motors, gearboxes, and complete drivetrains digitally with greater precision – for greater reliability and energy efficiency.



Simulate

Faster in motion: Add the digital twin of the drivetrain to your machine simulation to speed up your design and engineering phases and to accelerate your time-to-market!



Connect

Data in motion: Acquire high-quality raw data and connect your entire drivetrains or machines to cloud or on-premise platforms – for a consistent and secure data flow.



Optimize

Better in motion: Analyze and visualize drivetrain and machine data in digital solutions and apps to identify optimization potentials and concrete actionable measures how to tap it.

Use cases for digital drivetrain technology



Condition monitoring for drivetrains

Healthy in motion: Gain valuable insights into your drivetrain to optimize maintenance, system availability, cost efficiency, and sustainability: Discover intelligent digital condition monitoring for your drivetrains!

Are your drivetrains fit enough for tough times?

The industries are expected to produce ever more efficiently, ever more sustainably and ever more cost-effectively. And if you can't do that, it's easier to be left behind by the competition. Use digitalization and the data from your motors and converters to optimize your competitiveness – and to keep your production in motion.



What if you consume too much electricity?

With digital solutions and digital drive technology, you can significantly reduce your share of this!



What if you waste too much energy?

Digitalization enables you to detect energy waste and impending system downtimes at an early stage so that you can take counter-measures in due time!



What if your motors are incorrectly designed?

Digital tools make it quicker and easier to correctly design your drive components!



What if your drives fail unexpectedly?

With digital solutions, you can identify risks in your drivetrain at an early stage and react before a failure occurs.

"Our digital solutions transform your drivetrain value chain to the next level of efficiency and sustainability."

[siemens.com/digital-drivetrain](https://www.siemens.com/digital-drivetrain)

Next
Generation

SINAMICS VARIABLE FREQUENCY DRIVES

Driving **next
generation
applications**



SINAMICS frequency converters

SINAMICS frequency converters – the ultimate solution for all drive applications. From low voltage to direct current (DC), our frequency converters meet your needs. Our frequency converters meet your requirements and enable flexible drive applications. They offer digital functionality and help reduce energy consumption.

Driving next generation applications

When it comes to driving industry advancements, look no further than our SINAMICS frequency converters. They fuel the creation of innovative, next-generation applications that meet the unique needs of every industry.

From pumping and ventilating to moving, positioning, processing, and machining, our converters have you covered. Get ready to take your applications to new heights.



Low voltage converters

Low voltage frequency converters are suitable for a huge range of applications. For example, if materials must be moved, processed, positioned, pumped or compressed. Variable-speed operation saves energy and also increases process quality and process availability.



Servo converters

These servo converters meet the highest dynamic requirements for single and multi-axis applications. The perfect solution for machine tools, packaging machines, continuous material handling, cranes, rolling mills, test stands, material handling, robotics and many other applications requiring high-precision, dynamic motion control.



DC converters

The dynamic performance, ruggedness, and cost-effectiveness of DC technology continue to make it the most cost-effective and proven drive solution for many applications today – with numerous advantages in terms of reliability, ease of use, and operational performance.



Our variable frequency drives meet your requirements and enable flexible drive applications through digital functionality and versatility

How can you make production more efficient? Accelerate your digital transformation? And become more sustainable?

The answer is our SINAMICS frequency converters. They offer the versatility you need for a wide range of applications and advance your digital transformation by providing data to optimize your production processes. Our converters offer you integrated safety and security features, efficient engineering and software tools as well as comprehensive lifecycle services. In other words: Everything you need to address the next generation of applications – today and tomorrow.

EFFICIENT

Implement energy-efficient applications easily, quickly, and safely with efficient motion control.

- Sustainable drive systems
- Efficient Motion Control solutions
- Drive System Services

VERSATILE

Drives equipped with tailored safety features to ensure optimal machine safety in a wide range of industrial applications.

- Safety and Security Integrated
- Drive applications
- Drives for any industry

FUTURE-PROOF

Efficient engineering, powerful software tools, and cloud and edge connectivity for greater transparency.

- Digitalization in drive technology
- Efficient drive engineering
- Drive Software for all applications


Totally Integrated Automation



Totally Integrated Automation (TIA) offers smart automation development, flexible machine concepts, transparent operation, and sustainable solutions that enable access to data to calculate and optimize the product carbon footprint. We are constantly improving and expanding TIA to be future-proof and adaptive to existing and upcoming challenges.

A comprehensive portfolio for the challenges of today and tomorrow

The TIA offering is integrated seamlessly and it's so comprehensive that it provides the right automation solutions for every industry. We will continue to improve and expand our proven automation portfolio and are constantly including innovative technologies and solutions that pave the way towards the factory of the future.

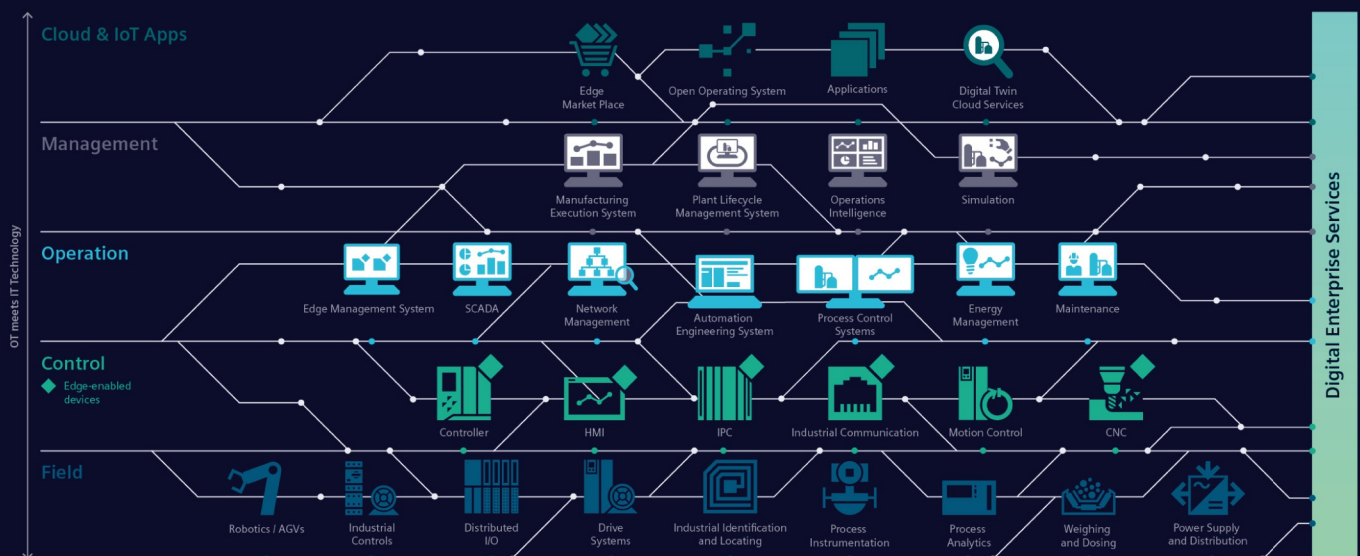

Real added value for the automation of your production

From the development of innovative machine concepts to engineering and optimized production:

TIA offers real added value along the entire value chain.

Smart Automation Development

Innovative machine concepts made easy: When you use standardized library concepts and preconfigured expertise, you can count on efficient engineering. Thanks to the integration of safety features, diagnostic functions, and cybersecurity, you also save valuable time.

Flexible Machine Concepts

No matter what new requirements emerge in the market, TIA supports modular machine concepts and the simple integration of new machines into existing lines – thanks to standardized hardware interfaces and engineering libraries. As a machine builder, this enables you to meet any challenge quickly and reliably.

Transparent Operation


Integrated interfaces let you achieve a new level of transparency for the essential performance indicators in your processes and plants. The connection between IT and OT along with efficient data management lay the foundation for new service models such as predictive maintenance.

Future-proof Automation

Our TIA portfolio is constantly being refined with a view to integrating automation technologies more and more efficiently. The components can then interact with modern IT capabilities, which are becoming increasingly important for specific applications in automation. TIA provides a solid foundation, whether for working with our Industrial Operations X portfolio or for everything the future has in store.

Sustainable Solutions

Sustainability starts with the acquisition of data. With the TIA portfolio, you can measure energy and resource data and make it transparent, providing a solid foundation for calculating the Product Carbon Footprint. This is crucial for drawing the right conclusions and responding to sudden changes in order to lastingly reduce CO₂ emissions and save more resources in production.



www.siemens.com/tia



TIA Selection Tool – quick, easy, smart configuration


For you to get the most out of our portfolio quickly and easily.

Do you always need the optimum configuration for planning your project?

For your application we offer the TIA Selection Tool to support all project planners, beginners and experts alike.

No detailed portfolio knowledge is necessary.

TIA Selection Tool is available for download as a free desktop version or a cloud variant.

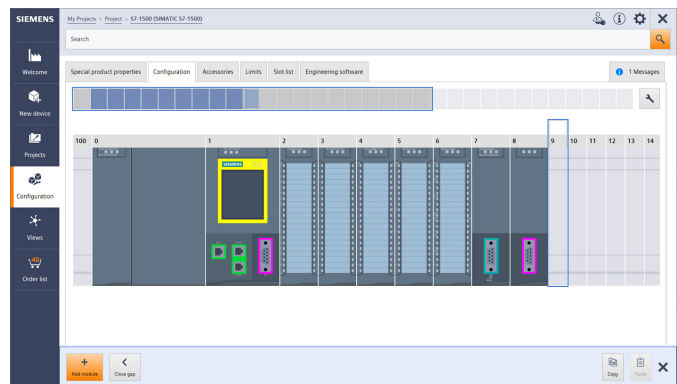

Your Advantages

Quick

- Configure a complete project with just a few entries – without a manual, without special knowledge
- Import and export of hardware configuration to TIA Portal or other systems
- Ideal visualization of the projects to be configured

Easy

- Tool download either as desktop version or web-based cloud version
- Technically always up-to-date about product portfolio and innovative approaches
- Highly flexible, secure, cross-team work in the cloud
- Direct ordering in SiePortal

Smart

- Smart selection wizard for error-free configuration and ordering
- Configuration options can be tested and simulated in advance
- Library for archiving sample configurations

The TIA Selection Tool is a completely paperless solution.
Download it now:
www.siemens.com/tst

For more
information,
scan the
QR code





Sustainability @Siemens

Transforming the everyday to
create a better tomorrow.

For more
information,
see
www.siemens.com/sustainability



Decarbonization

Ethics

Governance

Resource Efficiency

Equity

Employability

As a company, Siemens considers environmental, social and governance (ESG) criteria from all angles with its DEGREE framework (decarbonization, ethics, governance, resource efficiency, equity and employability). We are not only committed to reducing the carbon footprint in our own operations to net zero by 2030, but also helping our customers achieve their decarbonization and sustainability goals.

Mission & strategy

As a focused technology company, Siemens is committed to addressing the world's most profound challenges by leveraging the synergies between digitalization and sustainability.

Technology with aim and purpose

We develop technologies that connect the real and digital worlds and enable our customers to positively transform the industries that form the backbone of our economy: industry, infrastructure, transportation and healthcare.

Our contribution

Siemens makes an impact every day by providing innovative solutions in response to challenges relating to environmental protection, decarbonization, health and safety. Innovative solutions that have a clear goal: to make the world more sustainable, more integrative and a better place to live.

Sustainability facts

For almost 175 years, Siemens has been driven by the desire to improve the lives of people around the world with our technologies.



Siemens EcoTech is a framework for products that promotes the sustainable transformation of industry and infrastructure. The framework offers you transparency regarding the performance of our evaluated products in terms of environmental criteria, so that you can make informed decisions in order to achieve your sustainability goals, see www.siemens.com/SiemensEcoTech.

System overview



1/2	The SINAMICS converter family
1/3	Drive selection
1/5	SIMOTICS motors

System overview

The SINAMICS converter family

Overview

SINAMICS frequency converters

SINAMICS frequency converters are the ultimate solution for all drive applications. From low voltage to direct current (DC), our frequency

converters meet your needs.

With increased efficiency and versatility, take your drive applications to the next generation for a digital and sustainable future.










www.siemens.com/sinamics

Low voltage									Direct voltage
Standard performance frequency converters		Distributed frequency converters	Industry-specific frequency converters	Servo converters		High performance frequency converters			DC converters
									
SINAMICS V20 G120C G120 G200 G210	SINAMICS G130 G150	SINAMICS G115D G120D SIMATIC ET 200pro FC-2	SINAMICS G120X G210X	SINAMICS V90 S200	SINAMICS S210 (6SL5...)	SINAMICS G220	SINAMICS S120 S120M S220	SINAMICS S150 S220	SINAMICS DCM DCP ¹⁾
0.12 kW to 250 kW	75 kW to 2700 kW	0.37 kW to 7.5 kW	0.75 kW to 630 kW	0.05 kW to 7 kW	0.05 kW to 7 kW	0.55 kW to 160 kW	0.55 kW to 5700 kW	75 kW to 1200 kW	6 kW to 30 MW
Pumps, fans, compressors, conveyor belts, mixers, mills, spinning machines, textile machines, refrigerated display counters, fitness equipment, ventilation systems, single-axis positioning applications in machine and plant engineering	Pumps, fans, compressors, conveyor belts, mixers, mills, extruders	Conveyor technology, single-axis positioning applications (G120D)	Pumps, fans, compressors, building management systems, process industry, HVAC, water/waste water industries	Handling machines, packaging machines, automatic assembly machines, metal forming machines, printing machines, winding and unwinding units	Packaging machines, handling equipment, feed and withdrawal devices, stacking units, automatic assembly machines, laboratory automation, wood, glass and ceramics industry, digital printing machines	Pumps, fans, compressors, conveyor belts, mixers, mills, spinning machines, textile machines, refrigerated display counters, fitness equipment, ventilation systems, single-axis positioning applications in machine and plant engineering	Production machines (packaging, textile and printing machines, paper machines, plastic processing machines), machine tools, plants, process lines and rolling mills, marine drives, test bays	Test bays, cross cutters, centrifuges	Rolling mill drives, wire-drawing machines, extruders and kneaders, cableways and lifts, test bay drives
Catalog D 31.1 D 36.3 D 36.4	Catalog D 11	Catalog D 31.2	Catalog D 31.5 D 36.5	Catalog D 33 D 37.1	Catalog D 32	Catalog D 36.1	Catalogs D 21.3, D 21.4 D 38	Catalog D 21.3 D 38	Catalog D 23.1, SiePortal
Engineering tools (e.g. Siemens Product Configurator, TIA Selection Tool, DriveSim Engineer, STARTER and SINAMICS Startdrive)									

¹⁾ DC/DC controllers, see SiePortal.

Application



SINAMICS selection guide – typical applications

Use	Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality					
	Continuous motion			Non-continuous motion		
	Basic	Medium	High	Basic	Medium	High
						
Pumping, ventilating, compressing 	Centrifugal pumps Radial/axial fans Compressors V20 G200 G120X/G210X	Centrifugal pumps Radial/axial fans Compressors G120X/G210X G130/G150 DCM	Eccentric screw pumps G220 G210X S120/S220	Hydraulic pumps Metering pumps G120 G220	Hydraulic pumps Metering pumps S210 S220	Descaling pumps Hydraulic pumps S120/S220
Moving 	Conveyor belts Roller conveyors Chain conveyors V20 G115D G120C/G200 ET 200pro FC-2 ¹⁾	Conveyor belts Roller conveyors Chain conveyors Lifting/lowering devices Elevators Escalators/moving walkways Indoor cranes Marine drives Cable railways G120/G210 G120D G130/G150	Elevators Container cranes Mining hoists Excavators for open-cast mining Test bays G220 S120/S220 S150 DCM	Acceleration conveyors Storage and retrieval machines S200 G120 G220 G120D	Acceleration conveyors Storage and retrieval machines Cross-cutters Reel changers S210 DCM	Storage and retrieval machines Robotics Pick & place Rotary indexing tables Cross-cutters Roll feeds Engagers/disengagers S120/S220 S210 DCM
Processing 	Mills Mixers Kneaders Crushers Agitators Centrifuges V20 G120C/G200	Mills Mixers Kneaders Crushers Agitators Centrifuges Extruders Rotary furnaces G120/G210 G130/G150	Extruders Winders/unwinders Lead/follower drives Calenders Main press drives Printing machines G220 S120/S220 S150 DCM	Tubular bagging machines Single-axis motion control such as • Position profiles • Path profiles S200 G120 G220	Tubular bagging machines Single-axis motion control such as • Position profiles • Path profiles S210	Servo presses Rolling mill drives Multi-axis motion control such as • Multi-axis positioning • Cyclic cams • Interpolations S120/S220 S210 DCM

System overview

Drive selection

Application (continued)

Use	Requirements for torque accuracy/speed accuracy/position accuracy/coordination of axes/functionality					
	Continuous motion	Non-continuous motion				
Positioning 	Positioning G120 G210	Dynamic Positioning G120 G120D G210	Coordinated Motion G220	Indexing S200	Dynamic Indexing S210	Synchronized Motion & Camming S120 S150 DCP S210 S220
Machining 	Main drives for • Turning • Milling • Drilling S200	Main drives for • Drilling • Sawing S120/S220	Main drives for • Turning • Milling • Drilling • Gear cutting • Grinding S120/S220	Axis drives for • Turning • Milling • Drilling S200	Axis drives for • Drilling • Sawing S120/S220	Axis drives for • Turning • Milling • Drilling • Laser cutting • Gear cutting • Grinding • Nibbling and punching S120/S220

¹⁾ Information on the SIMATIC ET 200pro FC-2 frequency converter is available in Catalog D 31.2 and at www.siemens.com/et200pro-fc

Using the SINAMICS selection guide

The varying range of demands placed on modern variable frequency converters requires a large number of different types. Selecting the optimum converter is becoming a significantly more complex process. The application matrix shown simplifies this selection process considerably, by suggesting the ideal SINAMICS converter for examples of typical applications and requirements.


- The application type is selected from the vertical column
 - Pumping, ventilating, compressing
 - Moving
 - Processing
 - Positioning
 - Machining
- The quality of the motion type is selected from the horizontal row
 - Basic
 - Medium
 - High

More information

More information about SINAMICS is available on the internet at www.siemens.com/sinamics

Practical application examples and descriptions are available on the internet at www.siemens.com/sinamics-applications

Overview

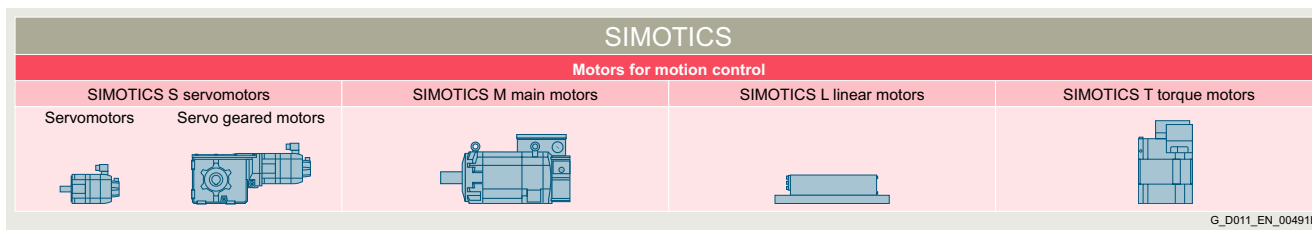**SIMOTICS stands for**

- 150 years of experience in building electric motors
- The most comprehensive range of motors for motion control applications
- Optimum solutions in all industries, regions and power/performance classes
- Innovative motor technologies of the highest quality and reliability
- Highest dynamic performance, precision and efficiency together with the optimum degree of compactness
- Our motors can be integrated into the drive train as part of the overall system
- A global network of skill sets and worldwide service around the clock

An outstanding performance for any job

A key characteristic of all SIMOTICS motors is their quality. They are robust, reliable, dynamic and precise to assure the requisite performance level for any process and deliver exactly the capabilities demanded by the application in hand. Thanks to their compact design, they can be integrated as space-saving units into installations. Furthermore, their impressive energy efficiency makes them effective as a means of reducing operating costs and protecting the environment.

A dense network of skill sets and servicing expertise around the world

SIMOTICS offers not only a wealth of sound experience gleaned from a development history which stretches back over around 150 years, but also the know-how of hundreds of engineers. This knowledge and our worldwide presence form the basis for a unique proximity to industries which feeds through in tangible terms to the specific motor configuration which is tailored to suit your application.

Our specialists are available to answer all your queries regarding any aspect of motor technology. At any time – wherever you are in the world. When you choose SIMOTICS, therefore, you reap the benefits of a global service network which is continuously accessible, thereby helping to optimize response times and minimize downtimes.

An end-to-end automation concept that sets new standards in efficiency and cost-effectiveness

Our portfolio includes perfectly matched components: SIMOTICS motors work precisely with the SINAMICS frequency converter family and are seamlessly integrated into the SIMATIC control landscape. The combination of SIMATIC industrial automation and SINUMERIK CNC systems as well as the MOTION-CONNECT system cabling and cabinet integration enables a holistic solution. The

system is supplemented by HMI devices, peripherals, power supplies and measuring systems.


Benefit from a complete system from a single source that meets your requirements in any industry.

A clearly structured portfolio

The entire SIMOTICS product portfolio is transparently organized according to application-specific criteria in order to help users select the optimum motor for their application.

Whatever it is that you want to move – we can supply the right motor for the task.

www.siemens.com/simotics

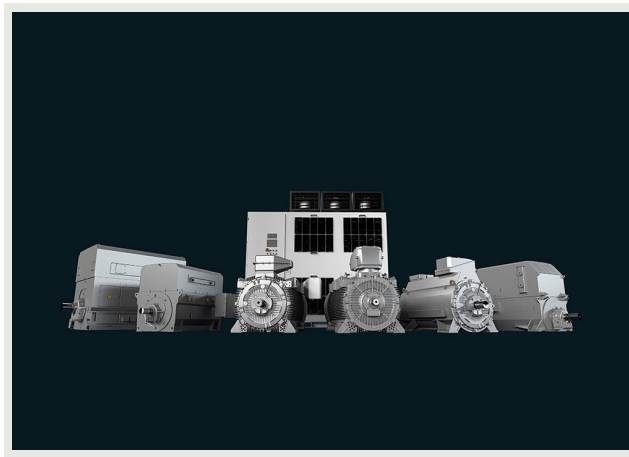Motors from Innomotics

You can also find suitable motors from our product partner Innomotics

www.innomotics.com

System overview

SIMOTICS motors

SINAMICS G210 standard converters



2/2	Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)
2/11	Supplementary system components
2/11	Communication Modules
2/11	CM-PN Communication Module
2/12	CM-DP Communication Module
2/13	CM-RS485 Communication Module
2/14	Option Modules
2/14	Introduction
2/15	OM-DQ Option Module DRIVE-CLiQ
2/16	OM-IIoT Option Module IIoT
2/17	OM-SMT Option Module Safe Motor Temperature
2/18	OM-ENC Option Module Encoder
2/19	OM-DIO Option Module Digital Inputs and Outputs
2/20	OM-AIO Option Module Analog Inputs and Outputs
2/21	ER-OM Expansion Rack Option Module
2/22	Smart Drive Interfaces
2/23	SINAMICS SDI Standard
2/25	SINAMICS SDI Pro 5.5"
2/32	SINAMICS Smart Adapter
2/34	Memory cards
2/37	SINAMICS Drive Software Options
2/38	Safety Integrated for SINAMICS G210
2/40	Security Integrated Functions
2/42	SINAMICS web server for SINAMICS G210
2/48	SINAMICS Startdrive commissioning tool
2/51	SINAMICS DCC (Drive Control Chart) in the TIA Portal
2/53	Drive system dimensioning with SIZER (integrated in TIA Selection Tool)

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Overview



SINAMICS G210 standard converters, degree of protection IP20 / UL Open Type, frame sizes FSA, FSB, FSC, FSD1, FSD2 and FSE

The SINAMICS G210 frequency converter is the new mid-range drive for a wide range of applications in continuous motion applications. The general-purpose drive combines seamless engineering, universal applicability, and built-in durability into one high-performance solution and is ideal suited for a wide range of industries such as general machinery, consumer packaged goods, life sciences, tire industry and many more.

This converter enables efficient engineering, seamless commissioning, and future-proof digitalization with full integration into the SINAMICS Startdrive commissioning tool integrated in the TIA Portal, the integrated web server on board. A seamlessly integrated EMC filter, a DC link choke and a braking chopper ensure a simplified system design.

SINAMICS G210 is universal by design to meet a wide range of continuous motion requirements. It combines motor openness with advanced motor control functions, modular application-specific hardware and software extensions as well as broad communication capabilities to fit a wide range of applications across industries with minimal integration effort. This converter supports induction, synchronous reluctance and permanent magnet motors with advanced motor control functions to ensure high efficiency and high performance. With easy-to-install option modules, application-specific upgrades can be achieved, such as an encoder connection or extended digital and analog input/output options. Applications can also be perfectly customized using the Drive Control Chart or Positioning Software license. To maximize flexibility, the converter supports a wide range of communication standards, including PROFINET, PROFIBUS, Modbus RTU/TCP and EtherNet/IP as well as secure vertical communication with OPC UA.

The integrated security features protect the converter reliably against unauthorized access, tampering, and data loss through secure default settings, strong access control, encrypted communication and data storage, as well as certified development and product security in accordance with IEC 62443-4-2, SL-C 2.

Centralized event detection and ProductCERT information also enable proactive defense against current threats. These functions are enabled via the user-friendly Security Wizard, which is integrated into the SINAMICS Startdrive commissioning tool integrated in the TIA Portal and into the web server.

Safety-integrated functions such as STO and SS1 as well as extended encoderless safety functions via PROFSafe communication, with safety support up to SIL 3 / PL e / Cat. 4, ensure reliable protection for people, machines, and plants. Safe Motor Temperature certified for ATEX ¹⁾ environments and the optional 3C3 coating contribute to the reliability of the machine even in harsh environments. Integrated S2 system redundancy as standard, as well as enhanced overload capabilities, further increase plant availability where uninterrupted operation is most important.

¹⁾ Available soon

All in all, SINAMICS G210 is the general purpose frequency converter designed for seamless, end-to-end engineering of continuous motion applications enabling users to realize a wide range of machines and motion requirements across industries, ensuring resilient and safe operation throughout the machine lifecycle.

The converter series provides a complete and seamless range of products.

Voltage versions and power ratings:

- Degree of protection IP20 / UL Open Type:
 - 380 V to 500 V 3 AC: 1.1 kW to 75 kW (1.5 hp to 100 hp)

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Benefits

Benefits

- **Boost productivity** thanks to easy commissioning, diagnostics, service and the integration into TIA Portal.
- **Maximize system flexibility** with a configurable drive solution enabled by hardware and software options.
- **Increase standardization** by deploying coordinated drive functions across projects to ensure consistent implementation and easier replication of proven solutions.
- **Safeguard system availability** even in harsh environments thanks to S2 redundancy, ATEX-certified input and edge and cloud connectivity.
- **Protect personnel, machines, processes, and data** with Safety Integrated and Security Integrated.
- **Improve energy efficiency** by taking advantage of motor openness and the integrated high-efficiency motor control.
- **Reduce complexity and enhance usability on site** with integrated power and energy components, as well as simplified usability via integrated web server, Wi-Fi adapter and operator panels.

Extended warranty

For SINAMICS G210, Siemens offers an optional extended warranty of up to 7.5 years via **Service Protect**:

- Free for the first 30 months after registering the product at: <https://www.siemens.com/serviceprotect>
- Subject to a charge for a further 3 or 5 years of extended warranty. You can find detailed information here: <https://support.industry.siemens.com/cs/ww/en/sc/4842>

You can find the correct Service Protect product number for your SINAMICS G210 converter using our simple configurator <https://www.siemens.com/serviceprotect>

Concerning standard warranty please ask your partner at Siemens. Your partner can be found in our Personal Contacts Database at: <https://www.siemens.com/automation-contact>

Application

Future-proof your applications by accelerating the digital transformation

During the realization phase, our powerful digitalization engineering tools, for example SINAMICS Startdrive commissioning tool in TIA Portal, speed up the implementation, commissioning and connectivity of SINAMICS G210. Thanks to the IIoT (Industrial Internet of Things) option module high frequency data can be transferred from the drive to the Industrial Edge and to the cloud. Finally, in the optimization phase, the acquired data can be analyzed on Industrial Edge or in the Cloud for example with the application Drivetrain Analyzer.

The result is improved machine capacity utilization, higher availability, enhanced productivity and optimized energy efficiency.

Design

Attain a high level of flexibility and seamlessly integrate your solutions globally

SINAMICS G210 offers a high-performance drive solution that can be matched to the customer-specific requirements using the wide range of available option modules and software functions.


- Different option modules can be easily plugged in beneath the converter, allowing the SINAMICS G210 to be customized for specific application requirements. These include a DRIVE-CLiQ interface, an interface for an encoder (HTL/TTL and SSI) as well as an ATEX-certified temperature sensor connection. For additional digital inputs/outputs the OM-DIO Option Module Digital Inputs and Outputs can be connected and the OM-AIO Option Module Analog Inputs and Outputs for analog inputs/outputs. The OM-IIoT Option Module IIoT realizes the gateway to digitalization. With the ER-OM Expansion Rack Option Module, the number of available option module slots can be further increased. Same flexibility concept applies to the communication of the converter. The communication modules can be simply exchanged to meet the requirements of the standard fieldbuses. In the first step, PROFINET, Modbus RTU/TCP, EtherNet/IP and PROFIBUS communication protocols are available.
- The SINAMICS Drive Software ensures smooth and reliable operation of SINAMICS G210 frequency converters while providing a scalable and comprehensive portfolio for maximum flexibility across a wide range of applications. Functions can be easily expanded through software options, enabling, for example, efficient implementation of positioning tasks with SINAMICS Positioning Extended. SINAMICS Positioning Advanced further enhances performance with integrated encoder less position control. Additional customization can be achieved using Drive Control Chart, allowing application-specific adaptations. Extended safety functionalities are available via the Safety Extended option, while OPC UA connectivity can be enabled through the corresponding license, ensuring seamless integration into modern automation environments.

The SINAMICS G210 is compliant with all global standards. This frequency converter offers a wide range of power ratings based on a seamlessly integrated system.

SINAMICS web server for SINAMICS G210

Web server for efficient commissioning, diagnostics, maintenance and operator control and monitoring, any time, from anywhere.

SINAMICS SDI Standard (Smart Drive Interface)

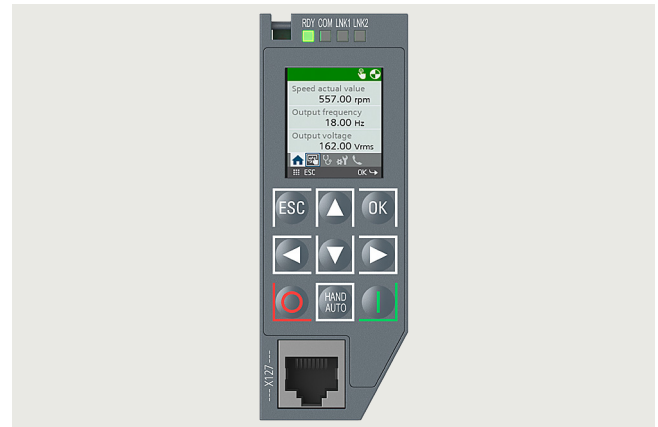

SINAMICS SDI Standard

The SINAMICS SDI Standard is a highly user-friendly Operator Panel for the SINAMICS G210. The SDI Standard supports newcomers and drive experts alike with essential tasks locally on the device. Thanks

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Design (continued)

to its high-contrast 1.4" color display and membrane keyboard, the device can assist with diagnosing faults in plain text, operation and monitoring, and with maintenance and servicing of the converter on site. The SINAMICS SDI Standard is included in the scope of delivery of the converters.

SINAMICS SDI Pro 5.5" (Smart Drive Interface)



SINAMICS SDI Pro 5.5, Handheld

The SINAMICS SDI Pro 5.5" represents a powerful and user-friendly Operator Panel for SINAMICS G210. The SINAMICS SDI Pro 5.5" supports both newcomers and drive experts. Thanks to its touch interface and high-contrast 5.5" color display, it goes hand-in-glove for commissioning, diagnostics, operator control and monitoring as well as on-site maintenance and servicing of converters.

The additional available options, such as the SINAMICS SDI Pro 5.5" handheld kit and SINAMICS SDI Pro 5.5" door mounting kit, extend the operating range of the device. With the SINAMICS SDI Pro 5.5" handheld kit, the device can be equipped with a rubber oversheath for mobile use. The SINAMICS SDI Pro 5.5" door mounting kit enables the SINAMICS SDI Pro 5.5" to be installed in control cabinet doors.

SINAMICS Smart Adapter



SINAMICS Smart Adapter

SINAMICS Smart Adapter is a Wi-Fi solution for engineering, service and maintenance tasks with the next generation of SINAMICS converters. The adapter is designed to be plugged into and powered from the service interface (X127) on the converter.

Design (continued)

SINAMICS Startdrive commissioning tool in TIA Portal

Integration via PROFINET communication, Modbus TCP or EtherNet/IP into a higher-level control system has never been so easy thanks to the full integration of SINAMICS G210 into the SINAMICS Startdrive commissioning tool in TIA Portal. In combination with SIMATIC S7-1500 and SIMATIC S7-1200 G2, the SINAMICS G210 drive with PROFINET communication is a harmonized and coordinated motion control solution in TIA Portal. The connection to the SINAMICS G210 converter is made via PROFINET. The safety connection (in case of faulty SIMATIC S7-1500F and SIMATIC S7-1200F G2) is also provided directly via PROFINET. This approach reduces engineering times and increases productivity.

Option Modules



OM-DQ Option Module DRIVE-CLiQ



OM-ILoT Option Module IloT

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Design (continued)



OM-SMT Option Module Safe Motor Temperature

Design (continued)




OM-AIO Option Module Analog Inputs and Outputs ¹⁾

¹⁾ Available soon



OM-ENC Option Module Encoder

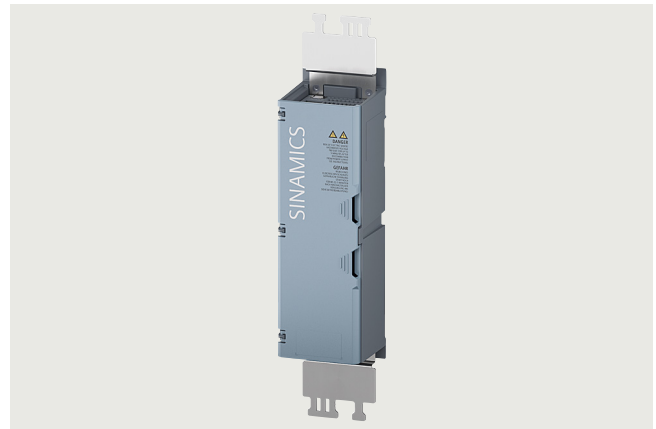

ER-OM Expansion Rack Option Module



OM-DIO Option Module Digital Inputs and Outputs

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Selection and ordering data

IP20/UL Open Type · 380 ... 500 V 3 AC · 1.1 kW to 75 kW (1.5 hp to 100 hp)

Article No. structure guide

SINAMICS G210 standard converter IP20/UL Open Type · 380 ... 500 V 3 AC											
Article No. structure	Article No. supplement	Article No. position:									
		[1-8]	[9]	[10]	[11]	[12]	[13]	[14]	[15]	[16]	
[1-8 - fixed value] Product family code	[1-8]										
SINAMICS G210	6SL4313-0	6SL4313-0									
[9] Coating ¹⁾ / Housing ²⁾	[9]		[9]								
Class 3C2/ Standard	C		C								
Class 3C3/ Standard	D		D								
[10 - fixed value] Hardware configuration	[10]			[10]							
Standard	A			A							
[11 ... 12] Rated power	[11 ... 12]				[11]	[12]					
Order code selection 08 ... 30 (1.1 ... 75 kW) - see product selection					■	■					
[13] Line filter	[13]						[13]				
Without integrated line filter	0						0				
With integrated line filter Category C2	2						2				
[14] Additional hardware option	[14]							[14]			
Without hardware option, SINAMICS SDI Standard included	A							A			
SINAMICS SDI Blind cover ³⁾	Y							Y			
[15] Communication	[15]								[15]		
No Fieldbus	A								A		
Modbus RTU	B								B		
PROFIBUS DP	D								D		
PROFINET, Modbus TCP and EtherNet/IP	F								F		
[16 - fixed value] Product generation	[16]									[16]	
-	0									0	
Article No. example 6SL4313-0CA18-0AF0:		6SL4313-0	C	A	1	8	-	0	A	F	0
Special versions	Order codes										
Only for selection of more than one hardware option (Additional hardware option = "A")		6SL4313-0	■A■	■	■	■	0-Z ... +. ... +. ...				
OM-DQ Option Module DRIVE-CLiQ	T01	6SL4313-0	■A■	■	■	■	0-Z T01				
OM-ILoT Option Module ILoT	T04	6SL4313-0	■A■	■	■	■	0-Z T04				
OM-SMT Option Module Safe Motor Temperature ³⁾	T05	6SL4313-0	■A■	■	■	■	0-Z T05				
OM-ENC Option Module Encoder	T06	6SL4313-0	■A■	■	■	■	0-Z T06				
OM-DIO Option Module Digital Inputs and Outputs	T10	6SL4313-0	■A■	■	■	■	0-Z T10				
OM-AIO Option Module Analog Inputs and Outputs ³⁾	T11	6SL4313-0	■A■	■	■	■	0-Z T11				
For the selection of SINAMICS Drive Software options for delivery in electronic form (eCoL) in the internal memory of the converter 6SL4 ... -Z ... +. ... +. ... For more information, see section SINAMICS Drive Software Options											

¹⁾ Coating according to IEC 60721-3-3: 2002

²⁾ Internal cooling

³⁾ Available soon

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Selection and ordering data

IP20/UL Open Type · 380 ... 500 V 3 AC · 1.1 kW to 75 kW (1.5 hp to 100 hp)

Ordering example

SINAMICS G210 standard converters IP20/UL Open Type - 380 ... 500 V 3 AC											
Article No. structure	Article No. supplement	Article No. position:									
		[1-8]	[9]	A	[11]	[12]	-	[13]	[14]	[15]	0
[9] Coating ¹⁾ / Housing ²⁾	[9]		[9]								
Class 3C2/ Standard	C		C								
[11 ... 12] Rated power	[11 ... 12]				[11]	[12]					
Order code selection 18 (15 kW)	18				1	8					
[13] Line filter	[13]							[13]			
Without integrated line filter	0							0			
[14] Additional hardware option	[14]								[14]		
Without hardware option, SINAMICS SDI Standard included	A								A		
[15] Communication	[15]									[15]	
PROFINET, Modbus TCP and EtherNet/IP	F									F	
Complete Article No. 6SL4313-0CA18-0AF0:		6SL4313-0	C	A	1	8	-	0	A	F	0
Special versions		Order codes									
OM-DQ Option Module DRIVE-CLiQ	T01										
OM-IloT Option Module IloT	T04										
OM-SMT Option Module Safe Motor Temperature	T05										
Complete Article No. with "-Z" and order codes		6SL4313-0CA18-0AF0 -Z T01 + T04 + T05									

¹⁾ Coating according to IEC 60721-3-3: 2002

²⁾ Internal cooling

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Selection and ordering data

IP20/UL Open Type · 380 ... 500 V 3 AC · 1.1 kW to 75 kW (1.5 hp to 100 hp)

Product selection

SINAMICS G210 standard converter IP20/UL Open Type · 380 ... 500 V 3 AC											SINAMICS G210 without integrated line filter									
Rated power				Rated output current				Rated input current		Frame size	Article No. position:									
Low overload (LO)		High overload (HO)		Low overload (LO)		High overload (HO)		Low overload (LO)												
Acc. to IEC 400 V kW	Acc. to NEC 480 V hp	Acc. to IEC 400 V kW	Acc. to NEC 480 V hp	Acc. to IEC 400 V A	Acc. to NEC 480 V A	Acc. to IEC 400 V A	Acc. to NEC 480 V A	Acc. to IEC 400 V A	Acc. to NEC 480 V A											
380 ... 500 V 3AC											[1-8]	[9]	[10]	[11]	[12]	-	[13]	[14]	[15]	[16]
1.1	1.5	0.75	1	3.2	3	2.3	2.1	2.5	2.2	FSA	6SL4313-0	■	A	0	8	-	■	■	■	0
1.5	2	1.1	1.5	4.2	3.4	3.2	3	3.6	3.30	FSA	6SL4313-0	■	A	1	0	-	■	■	■	0
2.2	3	1.5	2	6.0	4.8	4.2	3.4	5	4.5	FSA	6SL4313-0	■	A	1	1	-	■	■	■	0
3	4	2.2	3	7.7	6.2	6	4.8	6.6	5.70	FSA	6SL4313-0	■	A	1	2	-	■	■	■	0
4	5	3	4	10.2	7.6	7.7	6.2	8.6	6.8	FSA	6SL4313-0	■	A	1	3	-	■	■	■	0
5.5	7.5	4	5	12.5	11	10.2	7.6	11.4	9.7	FSA	6SL4313-0	■	A	1	5	-	■	■	■	0
7.5	10	5.5	7.5	18	14	12.5	11	15.6	13	FSB	6SL4313-0	■	A	1	6	-	■	■	■	0
11	15	7.5	10	24	21	18	14	22.3	18.7	FSB	6SL4313-0	■	A	1	7	-	■	■	■	0
15	20	11	15	32	27	24	21	28.9	23.8	FSC	6SL4313-0	■	A	1	8	-	■	■	■	0
18.5	25	15	20	38	34	32	27	35.3	29.3	FSC	6SL4313-0	■	A	2	0	-	■	■	■	0
22	30	18.5	25	45	40	38	34	41.6	35.2	FSD1	6SL4313-0	■	A	2	1	-	■	■	■	0
30	40	22	30	60	52	45	40	56.2	45.9	FSD1	6SL4313-0	■	A	2	3	-	■	■	■	0
37	50	30	40	75	65	60	52	68.8	57.8	FSD2	6SL4313-0	■	A	2	4	-	■	■	■	0
45	60	37	50	90	77	75	65	82.4	67.3	FSD2	6SL4313-0	■	A	2	6	-	■	■	■	0
55	75	45	60	110	96	90	77	99.6	83.6	FSE	6SL4313-0	■	A	2	7	-	■	■	■	0
75	100	55	75	139	124	110	96	134.7	110.1	FSE	6SL4313-0	■	A	3	0	-	■	■	■	0
Coating ¹⁾ / Housing ²⁾										[9]										
Class 3C2/ Standard										C	C									
Class 3C3/ Standard										D	D									
Hardware configuration										[10]										
Standard										A			A							
Line filter										[13]										
Without integrated line filter										0							0			
With integrated line filter Category C2										2							2			
Additional hardware option										[14]										
Without hardware option, SINAMICS SDI Standard included										A									A	
SINAMICS SDI Blind cover ³⁾										Y									Y	
Communication										[15]										
No Fieldbus										A									A	
Modbus RTU										B									B	
PROFIBUS DP										D									D	
PROFINET, Modbus TCP and EtherNet/IP										F									F	
Special versions - for details for the special versions see article No. structure guide																				
Only for selection of more than one hardware option (Additional hardware option = "A")											6SL4313-0■A■-■0-Z...+...+...									

¹⁾ Coating according to IEC 60721-3-3: 2002

²⁾ Internal cooling

³⁾ Available soon

Further technical specifications and documentation are available on the internet at:
www.siemens.com/sinamics-g210/documentation
 and concerning ordering and configuration via the Siemens Product Configurator in SiePortal:
www.siemens.com/sinamics-g210/configuration

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Selection and ordering data

IP20/UL Open Type · 380 ... 500 V 3 AC · 1.1 kW to 75 kW (1.5 hp to 100 hp)

Power options

SINAMICS G210 standard converters
IP20/UL Open Type · 380 ... 500 V 3 AC


SINAMICS G210 without integrated line filter	Recommended line-side overcurrent protection devices				Braking resistors The prefix "JJY:" is part of a Siemens internal order code which does not belong to the product number of the original equipment manufacturer Heine Resistor GmbH	Output reactors	Sine-wave filter
	More information at: www.siemens.com/sinamics-g210/ocpd						
	Fuses IEC-compliant		Fuses UL/cUL-compliant				
Article No.	Current A	Article No.	Fuse type Class/ Article No.	Current A	Article No.	Article No.	Article No.
380 ... 500 V 3AC							
6SL4313-0..08-...0	4	3NA3804	J	4	6SL3201-0BE14-3AA0	–	6SL3202-0AE21-1SA0
6SL4313-0..10-...0	6	3NA3801	J	6		–	
6SL4313-0..11-...0	10	3NA3803	J	10		–	
6SL4313-0..12-...0	16	3NA3805	J	12	6SL3201-0BE21-0AA0	–	6SL3202-0AE21-4SA0
6SL4313-0..13-...0	16	3NA3805	J	12		–	
6SL4313-0..15-...0	16	3NA3805	J	15		–	
6SL4313-0..16-...0	20	3NA3807	J	20	6SL3201-0BE21-8AA0	–	6SL3202-0AE22-0SA0
6SL4313-0..17-...0	25	3NA3810	J	25		–	
6SL4313-0..18-...0	40	3NA3817	J	40	6SL3201-0BE23-8AA0	–	6SL3202-0AE24-6SA0
6SL4313-0..20-...0	50	3NA3820	J	50		–	
6SL4313-0..21-...0	63	3NA3822	J	60	JJY:023422620001	–	6SL3202-0AE26-2SA0
6SL4313-0..23-...0	80	3NA3824	J	70	–	–	
6SL4313-0..24-...0	80	3NA3824	J	90	JJY:023424020001	–	6SL3202-0AE28-8SA0
6SL4313-0..26-...0	125	3NA3832	J	110	–	–	
6SL4313-0..27-...0	125	3NA3832	J	125	JJY:023434020001	–	6SL3202-0AE31-8SA0
6SL4313-0..30-...0	160	3NA3836	J	150	–	–	
							6SL3000-2CE32-3AA0

SINAMICS G210 standard converters

Built-in units - 1.1 kW to 75 kW (1.5 hp to 100 hp)

Dimensional drawings

SINAMICS G210 degree of protection IP20 / UL Open Type

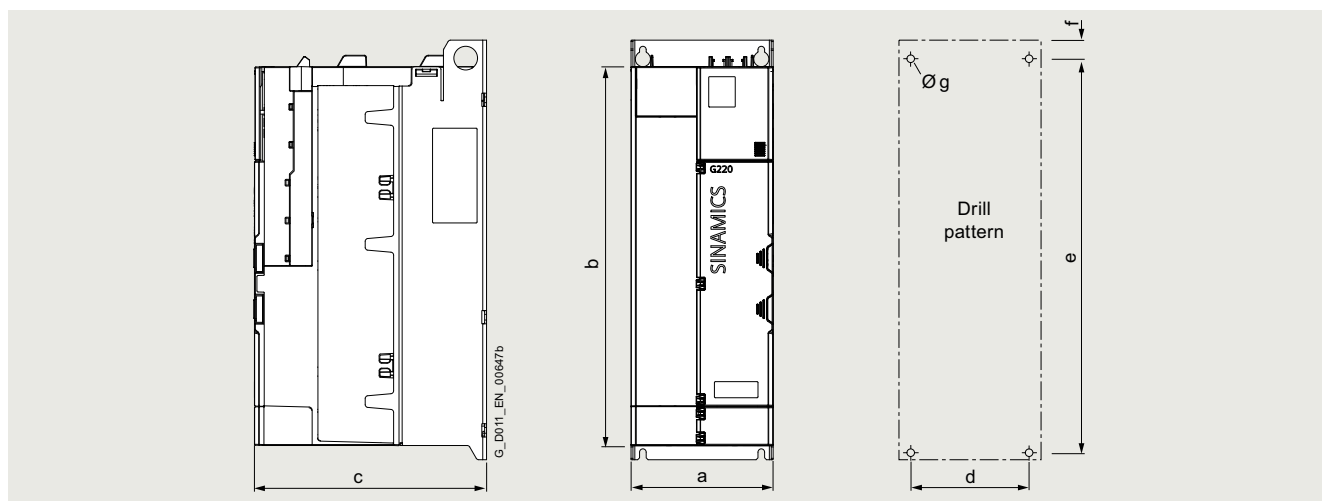

Principle dimension drawing and drill pattern for SINAMICS G210 degree of protection IP20 / UL Open Type

Frame size	Dimensions in mm (inches)			Drilling dimensions in mm (inches)				Mounting With screws (plus washers and nuts)	Cooling clearance in mm (inches)		Minimal mounting clearance (inches) front
	a (width)	b (height) ¹⁾	c (depth)	d	e	f	g		top	bottom	
FSA	73 (2.88)	250 (9.84)	208 (8.19)	50 (1.97)	275 (10.83)	10 (0.39)	11 (0.43)	4 × M4	85 (3.35)	85 (3.35)	10 (0.39)
FSB	85 (3.35)	355 (13.98)	208 (8.19)	50 (1.97)	375 (14.76)	8.7 (0.34)	11 (0.43)	4 × M5	85 (3.35)	108 (4.26)	10 (0.39)
FSC	125 (4.92)	355 (13.98)	209 (8.23)	100 (3.94)	375 (14.76)	10 (0.39)	11.5 (0.45)	4 × M5	85 (3.35)	149 (5.87)	10 (0.39)
FSD1	150 (5.91)	400 (15.75)	245 (9.65)	125 (4.92)	425 (16.73)	10 (0.39)	16 (0.63)	4 × M6	90 (3.55)	160 (6.30)	10 (0.39)
FSD2	200 (7.87)	442 (17.41)	245 (9.65)	175 (6.89)	475 (18.70)	10 (0.39)	16 (0.63)	4 × M6	90 (3.55)	160 (6.30)	10 (0.39)
FSE	250 (9.84)	520 (20.47)	245 (9.65)	225 (8.86)	550 (21.66)	10 (0.39)	16 (0.63)	4 × M6	90 (3.55)	193 (7.60)	10 (0.39)


¹⁾ Height is extended by the shield plate - refer to the equipment user manual for specific values.

SINAMICS G210 standard converters

Supplementary system components

Communication Modules / CM-PN Communication Module

Overview

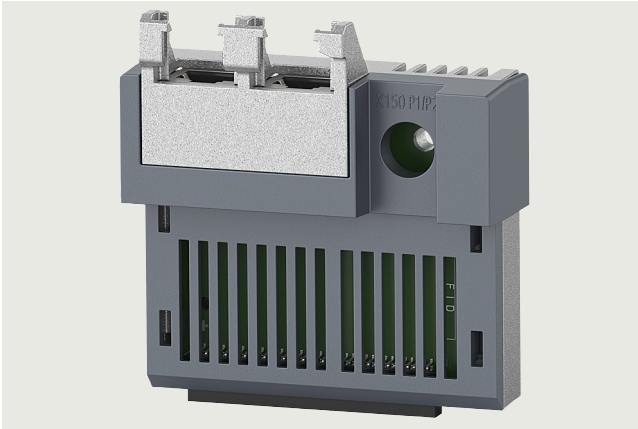

CM-PN Communication Module

The CM-PN Communication Module provides the capability to connect the SINAMICS G210/G210X/G220 converters with PROFINET, Modbus TCP, and EtherNet/IP. In the PROFINET environment, the CM-PN Communication Module offers particular highlights like System Redundancy (S2).

Selection and ordering data

Description	Article No.
CM-PN Communication Module	
• For ordering as a supplementary system component or a spare part	6SL4950-0AK00-0AF0
• For ordering as a part of the converter	6SL4 . . . - F .

Technical specifications


CM-PN Communication Module 6SL4950-0AK00-0AF0	
Weight	0.12 kg
Transfer rate	100 Mbit/s

SINAMICS G210 standard converters

Supplementary system components

Communication Modules / CM-DP Communication Module

Overview

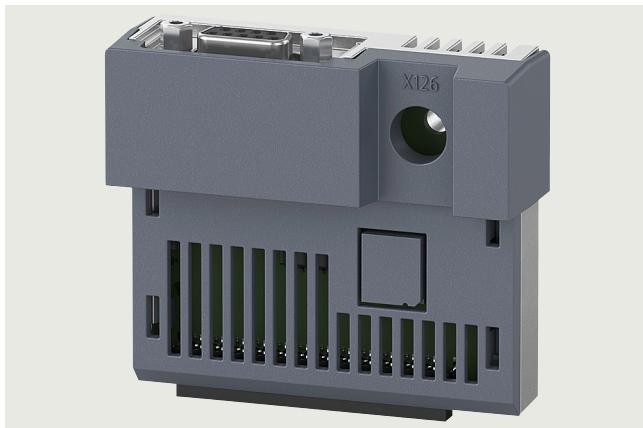

CM-DP Communication Module

The CM-DP Communication Module enables the connection of the SINAMICS G210/G210X/G220 converters to the PROFIBUS DP fieldbus.

Selection and ordering data

Description	Article No.
CM-DP Communication Module	
• For ordering as a supplementary system component or a spare part	6SL4950-0AK00-0AD0
• For ordering as a part of the converter	6SL4 . . . - D .

Technical specifications


CM-DP Communication Module 6SL4950-0AK00-0AD0	
Weight	0.12 kg
Transfer rate	12 Mbit/s
Transfer rate FSB, FSC, IP55	reduction to 1.5 Mbit/s

SINAMICS G210 standard converters

Supplementary system components

Communication Modules / CM-RS485 Communication Module

Overview

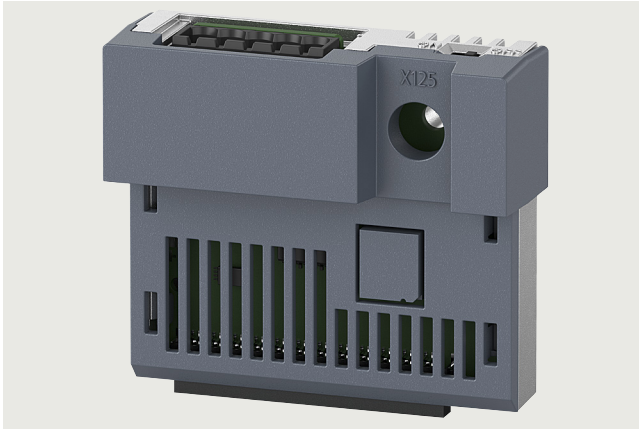

CM-RS485 Communication Module

The CM-RS485 Communication Module connects the SINAMICS G210/G210X/G220 converters with Modbus RTU.

Selection and ordering data

Description	Article No.
CM-RS485 Communication Module	
• For ordering as a supplementary system component or a spare part	6SL4950-0AK00-0AB0
• For ordering as a part of the converter	6SL4 . . . - B .

Technical specifications

	CM-RS485 Communication Module 6SL4950-0AK00-0AB0
Weight	0.115 kg
Transfer rate	187.5 kbit/s

SINAMICS G210 standard converters

Supplementary system components

Option Modules / Introduction

Overview

Option Modules



Example: OM-DQ Option Module DRIVE-CLiQ

- **OM-DQ** Option Module DRIVE-CLiQ
- **OM-IIoT** Option Module IIoT
- **OM-SMT** Option Module Safe Motor Temperature ¹⁾
- **OM-ENC** Option Module Encoder ²⁾
- **OM-DIO** Option Module Digital Inputs and Outputs
- **OM-AIO** Option Module Analog Inputs and Outputs ³⁾
- **ER-OM** Expansion Rack Option Module

SINAMICS G210/G210X/G220 converters can be flexibly customized with various option modules to meet specific requirements:

Option Modules available depending on the frame size of the converter

Option Modules Number	Slot	Frame size of the converter		FSC	FSD	FSE	FSF1	FSF2
		without ER-OM	with ER-OM					
• 1 Option Module	Upper slot	OM-DQ	OM-DQ, OM-IIoT, OM-SMT ¹⁾ , OM-ENC ²⁾ , OM-DIO, OM-AIO ³⁾					
• 2 Option Modules	Upper slot	Not possible	OM-IIoT, OM-SMT ¹⁾ , OM-ENC ²⁾ , OM-DIO, OM-AIO ³⁾					
	Lower slot		OM-DQ					
• 3 Option Modules	Upper slot	Not possible				OM-IIoT, OM-SMT ¹⁾ , OM-ENC ²⁾ , OM-DIO, OM-AIO ³⁾		
	Middle slot					OM-IIoT, OM-SMT ¹⁾ , OM-ENC ²⁾ , OM-DIO, OM-AIO ³⁾		
	Lower slot					OM-DQ		

¹⁾ Available soon in combination with SINAMICS G210/G210X.

²⁾ Not possible with SINAMICS G210X.

³⁾ Available soon.

Notes

- The modules can be easily plugged into the drive and replaced if your requirements change.
- Only one type of Option Modules can be installed. Per example, a SINAMICS G210/G210X/G220 converter can be equipped with only one **OM-IIoT** Option Module IIoT.
- The **ER-OM** Expansion Rack Option Module is an IP20 / UL Open Type external expansion for option modules. It allows connection of additional option modules to the converter, when the internal option module capacity of the converter is not sufficient.
- The **ER-OM** Expansion Rack Option Module is intended for operation via the OM-DQ Option Module DRIVE-CLiQ.

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-DQ Option Module DRIVE-CLiQ

Overview



OM-DQ Option Module DRIVE-CLiQ

The OM-DQ Option Module DRIVE-CLiQ connects the converter to the DRIVE-CLiQ modules.

The OM-DQ Option Module DRIVE-CLiQ is intended for operation in the option slot of the converter. The OM-DQ Option Module DRIVE-CLiQ connects the converter to other Option Modules or DRIVE-CLiQ modules that are mounted outside the converter.

Selection and ordering data

Description	Article No.
OM-DQ Option Module DRIVE-CLiQ	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0BA0
• For ordering as a part of the converter with an order code	6SL4 . . . - - . . . -Z T01

Technical specifications

OM-DQ Option Module DRIVE-CLiQ 6SL4950-0AL00-0BA0	
Max. current consumption (at 24 V DC)	0.08 A
Weight	0.075 kg
Operating temperature	-20 ... 60 °C
Transfer rate	100 Mbit/s

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-IIoT Option Module IIoT

Overview



OM-IIoT Option Module IIoT

The OM-IIoT Option Module IIoT connects the converter to the Industrial Internet of Things (IIoT).

The OM-IIoT Option Module IIoT is intended for operation in the option slot of the converter. The OM-IIoT Option Module IIoT can be operated outside the option slot via the OM-DQ Option Module DRIVE-CLiQ.

Selection and ordering data

Description	Article No.
OM-IIoT Option Module IIoT	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0EA0
• For ordering as a part of the converter with an order code	6SL4 ... - ... - ... -Z T04

Technical specifications

	OM-IIoT Option Module IIoT 6SL4950-0AL00-0EA0
Max. current consumption (at 24 V DC)	0.08 A
Weight	0.075 kg
Operating temperature	-20 ... 60 °C

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-SMT Option Module Safe Motor Temperature

Overview



OM-SMT Option Module Safe Motor Temperature

The OM-SMT Option Module Safe Motor Temperature is suitable for monitoring the temperature of a motor in a hazardous atmosphere. The OM-SMT Option Module Safe Motor Temperature monitors the temperature of motors with two connected PTC temperature sensors. It also detects short-circuits and wire breaks in the sensor circuit.

The OM-SMT Option Module Safe Motor Temperature is intended for operation in the option slot of the converter. The OM-SMT Option Module Safe Motor Temperature can be operated outside the option slot via the OM-DQ Option Module DRIVE-CLiQ.

Selection and ordering data

Description	Article No.
OM-SMT Option Module Safe Motor Temperature ¹⁾	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0FA0
• For ordering as a part of the converter with an order code	6SL4 . . . - -Z T05

¹⁾ Available soon in combination with SINAMICS G210/G210X.

Technical specifications

	OM-SMT Option Module Safe Motor Temperature 6SL4950-0AL00-0FA0
Max. current consumption (at 24 V DC)	0.08 A
Weight	0.075 kg

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-ENC Option Module Encoder

Overview



OM-ENC Option Module Encoder

The OM-ENC Option Module Encoder provides interfaces for an encoder and a temperature sensor.

The OM-ENC Option Module Encoder is intended for operation in the option slot of the converter. The OM-ENC Option Module Encoder can be operated outside the option slot via the OM-DQ Option Module DRIVE-CLiQ.

Selection and ordering data

Description	Article No.
OM-ENC Option Module Encoder	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0GA0
• For ordering as a part of the converter with an order code	6SL4 ... - ... -Z T06

Technical specifications

OM-ENC Option Module Encoder 6SL4950-0AL00-0GA0	
Max. current consumption (at 24 V DC)	
• Max. current consumption without encoders (ADC)	0.1 A
• Max. current consumption with encoders (ADC)	0.45 A
Weight	0.084 kg
Operating temperature	-20 ... 60 °C

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-DIO Option Module Digital Inputs and Outputs

Overview



OM-DIO Option Module Digital Inputs and Outputs

The OM-DIO Option Module Digital Inputs and Outputs expands the functionality of the converter by adding four bi-directional digital inputs and outputs and three relay outputs, enhancing its overall control capabilities.

An external 24 V DC power supply is required to power the module.

The OM-DIO Option Module Digital Inputs and Outputs is intended for operation in the option slot of the converter. The OM-DIO Option Module Digital Inputs and Outputs can be operated outside the option slot via the OM-DQ Option Module DRIVE-CLiQ.

Selection and ordering data

Description	Article No.
OM-DIO Option Module Digital Inputs and Outputs	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0LA0
• For ordering as a part of the converter with an order code	6SL4 . . . - - -Z T10

Technical specifications

	OM-DIO Option Module Digital Inputs and Outputs 6SL4950-0AL00-0LA0
Max. current consumption (at 24 V DC)	0.1 A
Digital inputs and outputs	• 4 x bidirectional digital input/output • 1 x NO/NC relay output, 230 V AC • 2 x NO relay output 230 V AC
Weight	0.097 kg
Operating temperature	-20 ... 60 °C

SINAMICS G210 standard converters

Supplementary system components

Option Modules / OM-AIO Option Module Analog Inputs and Outputs

Overview



OM-AIO Option Module Analog Inputs and Outputs

OM-AIO Option Module Analog Inputs and Outputs provides additional analog inputs and outputs. These enhance the control capabilities of the converter. The analog channels support voltage and current modes.

An external 24 V DC power supply is required to power the module.

OM-AIO Option Module Analog Inputs and Outputs is intended for operation in the option slot of the converter. OM-AIO Option Module Analog Inputs and Outputs can be operated outside the option slot via the OM-DQ Option Module DRIVE-CLiQ.

Selection and ordering data

Description	Article No.
OM-AIO Option Module Analog Inputs and Outputs ¹⁾	
• For ordering as a supplementary system component or a spare part	6SL4950-0AL00-0MA0
• For ordering as a part of the converter with an order code	6SL4 . . . - - . . . - Z T11

¹⁾ Available soon

Technical specifications


OM-AIO Option Module Analog Inputs and Outputs 6SL4950-0AL00-0MA0	
Max. current consumption (at 24 V DC)	0.1 A
Analog inputs and outputs	• 3 x differential inputs, resolution 16 bits + sign • 2 x analog outputs, resolution 16 bits
Weight	0.084 kg
Operating temperature	-20 ... 60 °C

SINAMICS G210 standard converters

Supplementary system components

Option Modules / ER-OM Expansion Rack Option Module

Overview

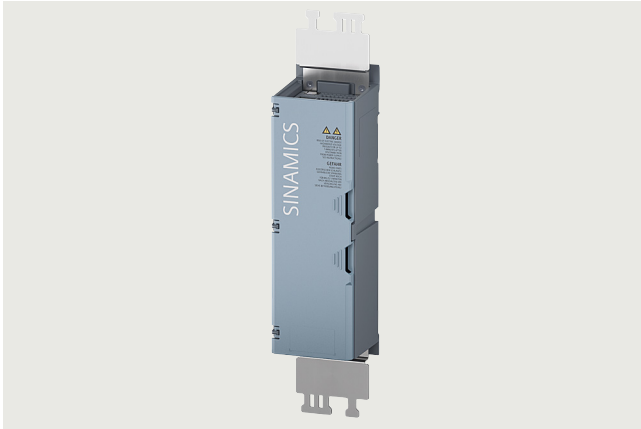


ER-OM Expansion Rack Option Module

The ER-OM Expansion Rack Option Module is an IP20 / UL Open Type external expansion for option modules. It allows connection of additional option modules to the converter, when the internal option module capacity of the converter is not sufficient.

The ER-OM Expansion Rack Option Module is intended for operation via the OM-DQ Option Module DRIVE-CLiQ.

Integration

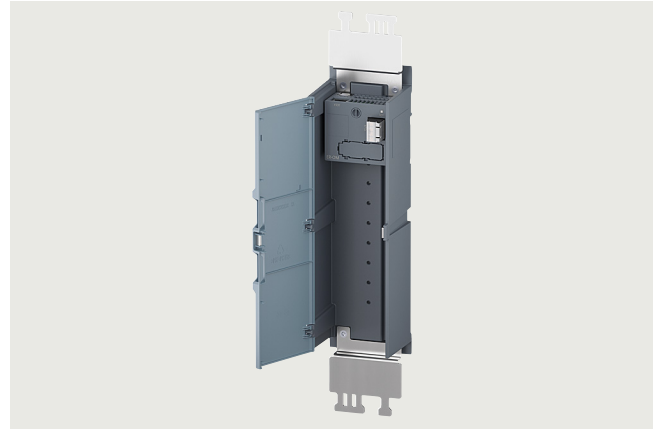

ER-OM Expansion Rack Option Module, open door

Selection and ordering data

Description	Article No.
ER-OM Expansion Rack Option Module	
For ordering as a supplementary system component or a spare part	6SL4960-0AM00-0AA0

Technical specifications


	ER-OM Expansion Rack Option Module 6SL4960-0AM00-0AA0
Max. current consumption (at 24 V DC)	0.1 A
Weight	0.774 kg
Operating temperature	-20 ... 60 °C

SINAMICS G210 standard converters


Supplementary system components

Smart Drive Interfaces

Overview

Operator panel	SINAMICS SDI Standard	SINAMICS SDI Pro 5.5"
Description	 With its high-contrast color display (1.4"), menu navigation and the extensive functionality provided by the integrated web server of the connected converter, it is easy to implement commissioning, diagnostics, operator control and monitoring, and service scenarios of the standard drives, for example.	 Thanks to the high-contrast color touch display (5.5"), menu navigation and the extensive functionality provided by the integrated web server of the connected converter, it is easy to implement commissioning, diagnostics, operator control and monitoring, and service scenarios of the standard drives, for example.
Possible applications	Integrated into the SINAMICS G210/G210X/G220 converter	- Can be mounted in a control cabinet door using a door mounting kit (achievable degree of protection is IP55/UL type 12 enclosure) - The SINAMICS SDI Pro 5.5" can also be used as a handheld device when using the handheld kit. - Wired connection to the converter via the service interface (X127) or PROFIBUS interface (X150) - Direct power supply via the service interface of the converter (X127)
Quick commissioning without expert knowledge		- Easy commissioning of standard applications via quick/advanced commissioning, no knowledge of the parameter structure necessary - Series commissioning with clone function (backup/restore). Backup files are stored directly on the SINAMICS SDI Pro 5.5" - User-defined parameter list with focused, custom parameter selection - Simple on-site commissioning thanks to its use as a handheld
High degree of operator friendliness and intuitive handling	- Intuitive navigation with integrated keyboard - Graphical color display (1.4") to show status values such as pressure or flow rate in the form of scalar values - Status display with freely selectable units to specify physical values - User interface has context-sensitive help, making diagnostics of alarms, for example, possible with minimal documentation - Direct manual operation of the drive with easy switchover between the automatic and manual modes - The following languages are supported: English, French, German, Italian, Spanish, Chinese Simplified	- Intuitive navigation thanks to touch operation - Graphic color touch display (5.5") to show status values such as pressure or flow rate in the form of scalar values - Status display with predefined units - User interface has context-sensitive help, making commissioning or diagnostics of alarms, for example, possible with minimal documentation - Direct manual operation of the drive with the control panel - The SINAMICS SDI Pro 5.5" lets the user easily access a large number of converters (installed in a cabinet, for example) either with an automatically or manually created converter list. - The following languages are supported: English, French, German, Italian, Spanish, Chinese Simplified
Minimization of maintenance times	- Diagnostics using plain text display, can be used locally on-site without documentation - The support function allows for easy access to information about the converter, for which it provides QR code links. - Using the support function, the display can show a QR code representing the IP address of the service/fieldbus interface currently configured on the converter. By scanning the code (for example, with a smartphone), the user can easily access the integrated web server of the converter. - Simple cloning of the SINAMICS SDI default settings with the converter's backup/restore function. - Updating of the SINAMICS SDI standard function with a drive firmware upgrade.	- Diagnostics using plain text display; can be used locally on-site without documentation - The support function allows for easy access to information about the SINAMICS SDI Pro 5.5" and the converter, for which it provides QR code links. - Simple cloning of the SINAMICS SDI Pro 5.5" settings with the backup/restore function of the Panel. - Thanks to the USB C interface on the SINAMICS SDI Pro 5.5", the Panel can be upgraded to the latest features. The upgrade only affects the internal functionality of the SINAMICS SDI Pro 5.5". The user interface of the converter is not affected. It is provided by the respective converter.

Overview

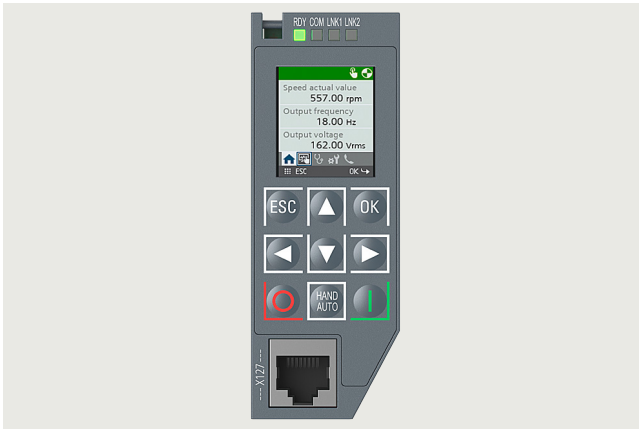


SINAMICS SDI Standard

The SINAMICS SDI Standard is a highly user-friendly Operator Panel for the SINAMICS G210/G210X/G220. The SDI Standard supports newcomers and drive experts alike with essential tasks locally on the device. Thanks to its high-contrast 1.4" color display and membrane keyboard, the device can assist with diagnosing faults in plain text, operation and monitoring, and with maintenance and servicing of the converter on site.


The user interface to the converter is provided by the converter's built-in web server. The technology in the SDI Standard gives it access to select functions of the web server.

This includes:


- Home page with selected display values (values are configurable)





- Operate motor in manual operation




Overview (continued)



- Diagnose alarms in plain text and view fault cause/remedy messages



- System settings to configure the web server, converter interfaces, date and time and display settings (brightness, backlight timer) as well as the user interface language






SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Standard

Overview (continued)

- Support page with scannable information (QR code) for the configured IP address of the service interface and PROFINET interface (X127 / X150) and for the individual components of the SINAMICS G210/G210X/G220 drive.



Selection and ordering data

Description	Article No.
SINAMICS SDI Standard integrated in SINAMICS G210/G210X/G220 Operating languages: German, English, French, Italian, Spanish, Chinese Simplified	6SL4950-0AH12-2AA0

Technical specifications

SINAMICS SDI Standard	
Display	1.4" color display
• Resolution	128 × 160 pixels
User languages	German, English, French, Italian, Spanish, Chinese Simplified
Converter service interface	X127 service interface (1 RJ45)
Ambient temperature	
• During storage	-25 ... +55 °C (-13 ... +131 °F)
• During transport	-40 ... +70 °C (-40 ... +158 °F)
• During operation	-20 ... +60 °C (-4 ... +140 °F)
- without power reduction, max.	+40 °C (+104 °F)
Environmental class/harmful chemical substances	
• Operation	
Air humidity	Relative air humidity < 95 %, non-condensing
Degree of protection	IP20/IP55
Certificate of suitability	UL, cUL, CE, EAC, REACH, RoHS II, Green Passport

SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Overview




SINAMICS SDI Pro 5.5"

The SINAMICS SDI Pro 5.5" represents a powerful and user-friendly Operator Panel for SINAMICS frequency converters of the next generation (from firmware V6.1). The SINAMICS SDI Pro 5.5" supports both newcomers and drive experts. Thanks to its touch interface and high-contrast 5.5" color display, it goes hand-in-glove for commissioning, diagnostics, operator control and monitoring as well as on-site maintenance and servicing of converters.


The user interface to the converter is provided by the converter's built-in web server. The technology of the SINAMICS SDI Pro 5.5" grants full access to the functionality of the web server. The web server functions supported for the respective converter can be called up in the sections on the SINAMICS web servers.

In addition, the SINAMICS SDI Pro 5.5" offers its own configuration interface with the following settings options:


- SINAMICS SDI Pro 5.5" main menu

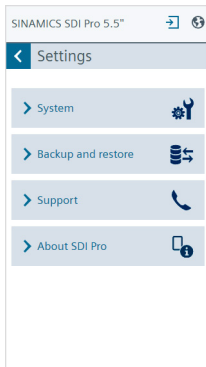


Overview (continued)

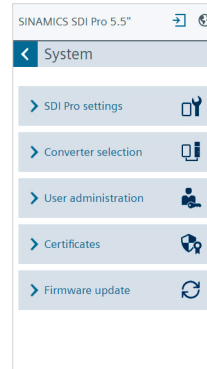

- Set the SINAMICS SDI Pro 5.5" system settings such as user interface language, real-time clock, interface settings, display settings, change background image of the home screen

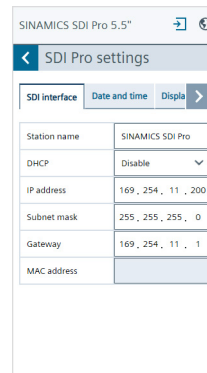

- Back up and restore the SINAMICS SDI Pro 5.5" device settings

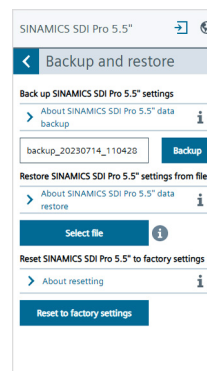


- Access product-specific information (e.g. manuals, downloads, FAQs) and information on SINAMICS SDI Pro 5.5" (e.g. currently installed firmware version, security notifications)

SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Overview (continued)

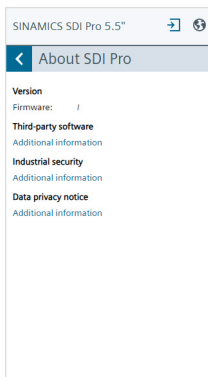

The additionally available options in the form of the SINAMICS SDI Pro 5.5" handheld kit and SINAMICS SDI Pro 5.5" door mounting kit extend the operating range of the device. With the SINAMICS SDI Pro 5.5" handheld kit, the device can be equipped with a rubber oversheath for mobile use. The SINAMICS SDI Pro 5.5" door mounting kit enables the SINAMICS SDI Pro 5.5" to be installed in control cabinet doors.

Benefits

- User interface
 - Intuitive user interface for the drive provided by the converter itself
 - High-contrast 5.5" color touch display
 - SINAMICS SDI Pro 5.5" device design open for future function expansions (e.g. device functions, languages)
 - Easily upgradable to latest features via USB C interface
- Commissioning
 - Easy commissioning of the connected converter via the Quick/Advanced Commissioning Wizard. Neither variant requires expert knowledge of converter parameters.
 - Quick commissioning gives the user simple and fast access to all the basic parameters required to commission simple applications.
 - Advanced commissioning provides the parameters required to commission more complex applications, dispensing with the need to switch between different areas within the user interface.
 - Fast series commissioning of frequency converters thanks to cloning function (backup/restore)
 - For quicker access right on the SINAMICS SDI Pro 5.5", the names of the backup files you wish to create can be entered or modified with the on-screen keyboard.
 - Context-sensitive help functions provide support for the user during commissioning.
 - Simple local commissioning on-site using the handheld kit
- Operator control and monitoring
 - Simple, individual local drive control (start/stop, setpoint value specification, change in direction of rotation)
 - Actual values from the converter are displayed clearly. You can change the parameters you wish to monitor depending on the requirement.
- Diagnostics
 - Rapid diagnostics thanks to on-site plain text display
 - Integrated plain text help function for local display and resolution of fault messages

Benefits (continued)

- Service and Support function
 - Input/output of a service contact person
 - Easy access to component information via QR code shown on the display
 - Quick access to product information, documentation, FAQs using mobile devices (e.g. smartphones, tablets) by scanning a QR code generated on the SINAMICS SDI Pro 5.5"
 - Optional scanning and evaluation of the QR code with the Industry Online Support app (<https://support.industry.siemens.com/cs/ww/en/sc/2067>)
 - Simple cloning of specific settings of the SINAMICS SDI Pro 5.5" such as the language setting, backlight timer, date/time settings, interface settings (IP address), list of available converters, user administration of the SINAMICS SDI Pro 5.5". Settings made once can thus be transferred easily to many other SINAMICS SDI Pro 5.5" devices.
 - Firmware upgrade for the SINAMICS SDI Pro 5.5"
The SINAMICS SDI Pro 5.5" can be updated and expanded with the integrated USB C port.
Data can be transferred from a PC to the device for future expansions. Furthermore, the USB interface allows user languages and firmware updates¹⁾ that will become available in future to be downloaded.
- Management of users allowed to have access to the SINAMICS SDI Pro 5.5" settings (UMAC)
- Management of certificates for encrypted communication to the converter (https)

¹⁾ For information on updates to the SINAMICS SDI Pro 5.5", see www.siemens.com/sinamics-sdi-pro-dl


SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Integration

- Flexible deployment in point-to-point and network configurations
 - The SINAMICS SDI Pro 5.5" can either be connected to the service interface (X127) or the PROFINET interface (X150) of the converter.
 - The SINAMICS SDI Pro 5.5" can be directly supplied with power via the converter service interface. An external power supply is not required.¹⁾
 - If the SINAMICS SDI Pro 5.5" is operated in a network with n converters ($1 < n \leq 20$), the converters can be accessed in a flexible way via a drive list. As such, a wide range of converters can be operated or diagnosed via an SINAMICS SDI Pro 5.5", for instance. The drive list can be conveniently created on the SINAMICS SDI Pro 5.5" either automatically or manually.

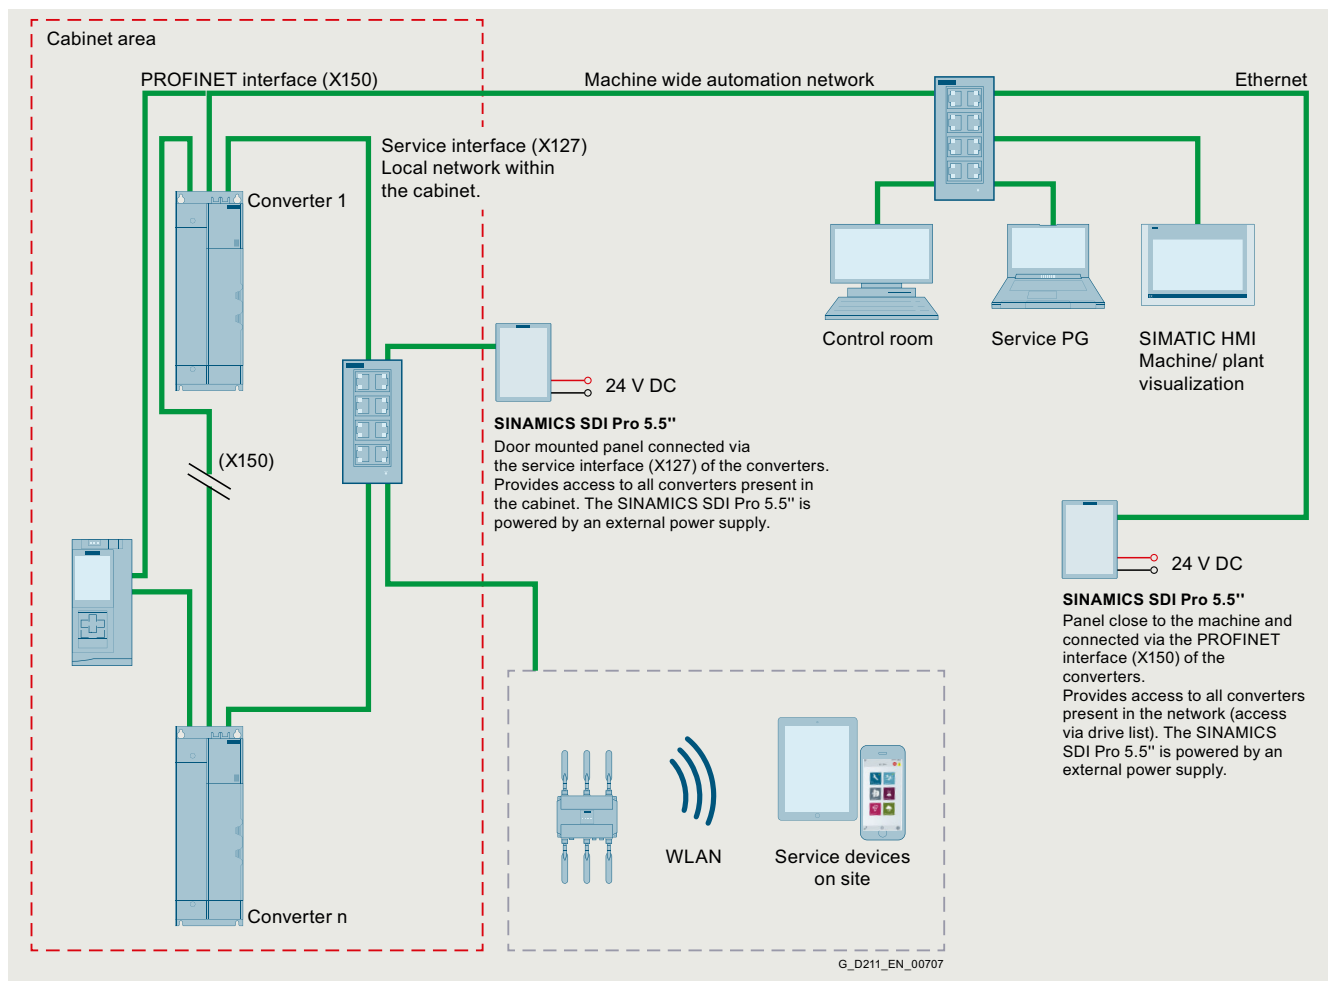

Application example in which multiple converters in a control cabinet can be reached with one SINAMICS SDI Pro 5.5"

¹⁾ To use the operator panel without an additional power supply at the service interface of the converter (X127; point-to-point connection), an 8-wire RJ45 Ethernet cable is required. Pre-assembled cables can be ordered as an accessory.

SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Selection and ordering data

Description	Article No.
SINAMICSSDI Pro 5.5" ¹⁾ for use with SINAMICS frequency converters of the next generation (from firmware V6.1) Operating languages: German, English, French, Italian, Spanish, Chinese Simplified	6SL4950-0AH35-2AA0
Accessories	
SINAMICS SDI Pro 5.5" handheld kit ¹⁾ for use with the SINAMICS SDI Pro 5.5" Included in the scope of delivery: • Handheld housing • Ethernet connecting cable Length 3 m (9.84 ft), can be used to connect a SINAMICS SDI Pro 5.5" with a converter	6SL4950-0AH65-0AA0
SINAMICS SDI Pro 5.5" door mounting kit ¹⁾ for mounting a SINAMICS SDI Pro 5.5" in control cabinet doors with metal thicknesses of 1 ... 3 mm (0.04 ... 0.12 in) Degree of protection IP55 Included in the scope of delivery: • Metal plate for installing the SINAMICS SDI Pro 5.5" • Fixing accessories	6SL4950-0AH55-0AA0
IE TP Cord RJ45/RJ45 ²⁾ Patch cable, available fully assembled • With 4 x 2 cores for 10/100/1000 Mbps Ethernet • Small cable diameter • Cat6 _A (4 x 2) of the ISO/IEC 11801 and EN 50173 international cabling standards	
0.3 m	6XV1870-3QE30
0.5 m	6XV1870-3QE50
1 m	6XV1870-3QH10
2 m	6XV1870-3QH20
3 m	6XV1870-3QH30
4 m	6XV1870-3QH40
6 m	6XV1870-3QH60
10 m	6XV1870-3QN10
15 m	6XV1870-3QN15
20 m	6XV1870-3QN20
25 m	6XV1870-3QN25
30 m	6XV1870-3QN30

¹⁾ The Ethernet connection cable to connect the SINAMICS SDI Pro 5.5" to the service interface of the converter (X127) or the PROFINET interface (X150) must be ordered separately. To use the operator panel without an additional power supply at the service interface of the converter (X127; point-to-point connection), an 8-wire RJ45 Ethernet cable is required. Pre-assembled cables can be ordered as an accessory.

²⁾ For applications where the space behind the SINAMICS SDI Pro 5.5" is very limited, a cable with angled connectors can be used. Such cables can be purchased from HARTING under the article number 09 48 858 5745 050. For information on HARTING cables visit www.harting.com.

SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Accessories


SINAMICS SDI Pro 5.5" handheld kit



SINAMICS SDI Pro 5.5", Handheld

A handheld kit can be ordered to assist with using the SINAMICS SDI Pro 5.5" while on the go. It contains a rubber housing and a 3 m long Ethernet connecting cable.

SINAMICS SDI Pro 5.5" door mounting kit

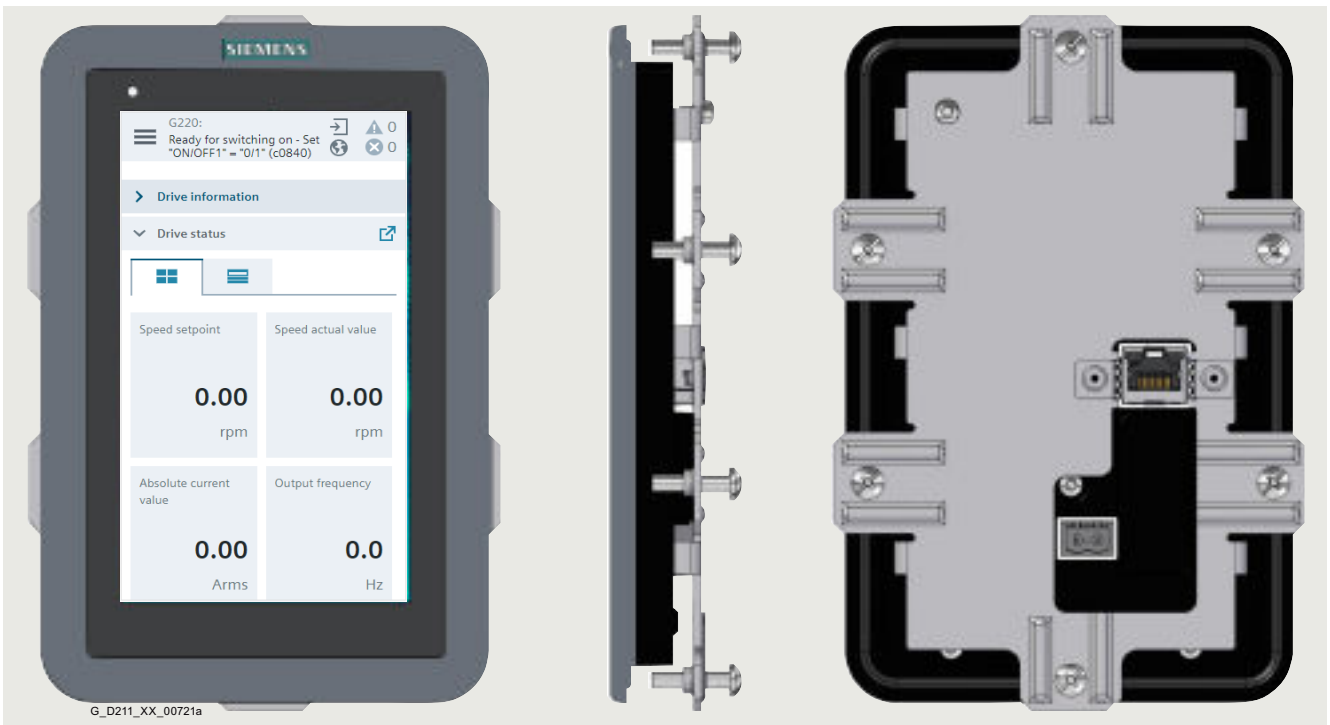

With the optional SINAMICS SDI Pro 5.5" door mounting kit, a SINAMICS SDI Pro 5.5" can be easily installed in a control cabinet door in just a few steps. The door mounting kit includes a metal plate for installing the SINAMICS SDI Pro 5.5" e.g. in a cabinet cutout.¹⁾

In case of door mounting with the SINAMICS SDI Pro 5.5" Operator Panel, the degree of protection IP55/UL type 12 enclosure is achieved for the front side.

¹⁾ The Ethernet connection cable to connect the SINAMICS SDI Pro 5.5" to the service interface of the converter (X127) or the PROFINET interface (X150) must be ordered separately. To use the operator panel without an additional power supply at the service interface of the converter (X127; point-to-point connection), an 8-wire RJ45 Ethernet cable is required. Pre-assembled cables can be ordered as an accessory.

SINAMICS G210 standard converters

Supplementary system components

Smart Drive Interfaces / SINAMICS SDI Pro 5.5"

Technical specifications

SINAMICS SDI Pro 5.5" 6SL4950-0AH35-2AA0	
Display	High-contrast color display
• Resolution	320 × 580 pixels
Operator panel	Touch display
User languages	German, English, French, Italian, Spanish, Chinese Simplified
Power supply	20 ... 29 V DC 24 V DC via the RJ45 (8-core) X127 cable connection from the converter ¹⁾ or external power supply via the external power supply terminals on the Operator Panel
Current, max.	300 mA
Ambient temperature	
• During transport and storage	-40 ... +70 °C (-40 ... +158 °F)
• During operation	When using the SINAMICS SDI Pro 5.5" handheld kit: -20 ... +55 °C (-4 ... +131 °F) If installed with the SINAMICS SDI Pro 5.5" door mounting kit: -20 ... +55 °C (-4 ... +131 °F)
Air humidity	Relative air humidity < 95 %, non-condensing
Environmental class/harmful chemical substances	
• Operation	Class 3C3 per IEC 60721-3-3: 2002
Degree of protection	IP20 on the rear side or when in use with the SINAMICS SDI Pro 5.5" handheld kit IP55 on the front side, mounted with the SINAMICS SDI Pro 5.5" door mounting kit
Dimensions (H × W × D)	167 mm × 111 mm × 16.1 mm (6.57 in × 4.37 in × 0.63 in)
Weight, approx.	0.275 kg (0.61 lb)
Certificate of suitability	CE, UKCA, RCM, cULus, EAC, KC-REM-S49-SINAMICS

- ¹⁾ The Ethernet connection cable to connect the SINAMICS SDI Pro 5.5" to the service interface of the converter (X127) or the PROFINET interface (X150) must be ordered separately.
To use the operator panel without an additional power supply at the service interface of the converter (X127; point-to-point connection), an 8-wire RJ45 Ethernet cable is required. Pre-assembled cables can be ordered as an accessory.

Technical specifications (continued)

SINAMICS SDI Pro 5.5" door mounting kit 6SL4950-0AH55-0AA0	
Weight, approx.	0.214 kg (0.47 lb)

SINAMICS SDI Pro 5.5" handheld kit 6SL4950-0AH65-2AA0	
Ambient temperature	
• During transport and storage	-40 ... +70 °C (-40 ... +158 °F)
Air humidity	Relative air humidity < 95 %, non-condensing
Degree of protection	IP20
Weight, approx.	0.265 kg (0.58 lb)

SINAMICS SDI Pro 5.5" door mounting kit 6SL4950-0AH55-0AA0	
Ambient temperature	
• During transport and storage	-40 ... +70 °C (-40 ... +158 °F)
Air humidity	Relative air humidity < 95 %, non-condensing
Degree of protection	IP20 on the rear side or inside of the cabinet IP55 on the front side, mounted with the SINAMICS SDI Pro 5.5" door mounting kit
Dimensions	
• Door mounting kit dimensions	Cabinet cutout: 93 mm × 153 mm (3.66 in × 6.02 in), Screws: M4 × 20, 6 pcs., Tightening torque: 0.1 Nm (0.89 lbf-in) / M3 × 6, 2 pcs., Tightening torque: 1.2 Nm (10.6 lbf-in)

SINAMICS G210 standard converters

Supplementary system components

SINAMICS Smart Adapter

Overview



SINAMICS Smart Adapter

SINAMICS Smart Adapter is a Wi-Fi solution for engineering, service and maintenance tasks for the next generation of SINAMICS converters (from firmware V6.1). The adapter is designed to be plugged into and powered from the service interface (X127) on the converter.

Benefits

- Wireless access to the converter-integrated web server via mobile users device
- Wireless access with SINAMICS Startdrive to the SINAMICS converters
- Portable and compact Wi-Fi solution for engineering, service and maintenance tasks for the next generation of SINAMICS converters (from firmware V6.1)
- Advanced security technology
- Plug and Play interface for easy connectivity
- User friendly

Application


SINAMICS Smart Adapter is used in general industrial applications as an engineering solution for quick commissioning and service.

The adapter is especially valuable in areas, which are difficult to access due to their mechanical mounting locations. The use of SINAMICS Smart Adapter avoids cable clutter and tripping points during commissioning and service tasks and therefore prevents from occasional accidents.

Function

- Easy and quick service and commissioning via a wireless solution using the converter-integrated web server
- Interface compatible with the next generation of SINAMICS converters (from firmware V6.1) and allows power supply of SINAMICS Smart Adapter directly from the converter.
- Advanced security with WPA3 protocol

Integration

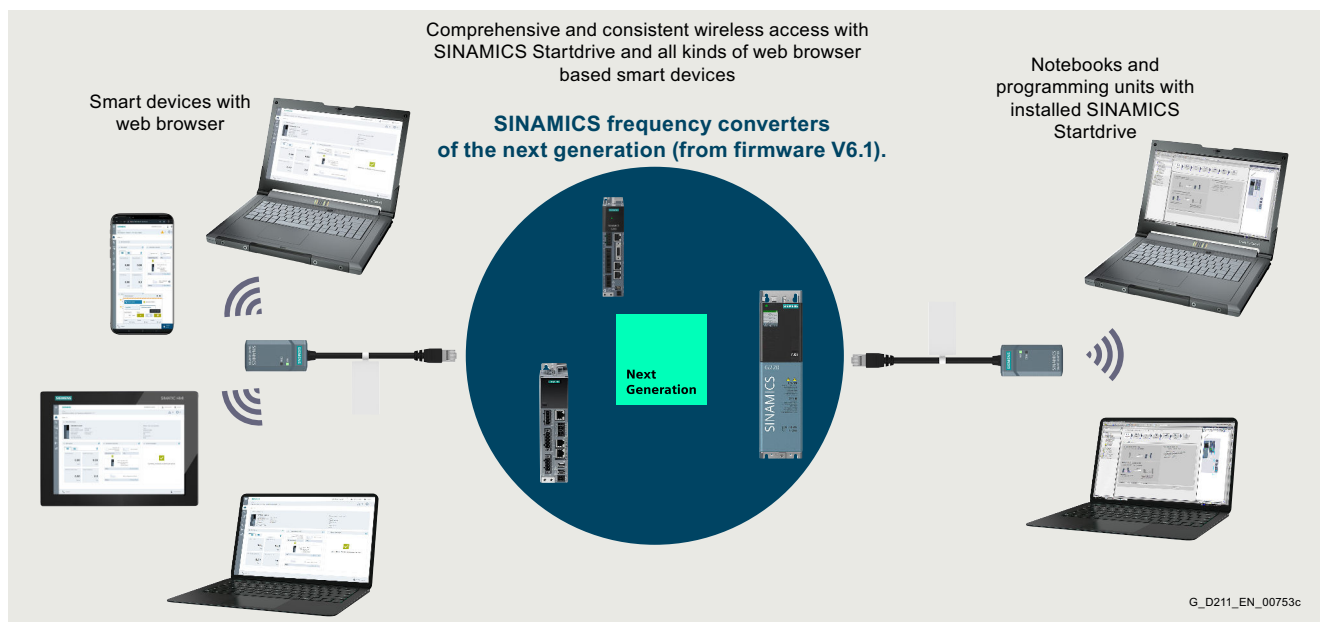

Wireless access with SINAMICS Startdrive via SINAMICS Smart Adapter

SINAMICS G210 standard converters

Supplementary system components

SINAMICS Smart Adapter

Selection and ordering data

Description	Article No.
SINAMICS Smart Adapter Wi-Fi solution compatible with the next generation of SINAMICS converters (from firmware V6.1)	6SL4950-0AJ00-0AA0

Technical specifications

	SINAMICS Smart Adapter 6SL4950-0AJ00-0AA0
Supported operating systems	Apple iOS (from 12.2), Android, Microsoft Windows, Mac OS (from 10.15)
Recommended browsers	Google Chrome (from 69.0), Microsoft Edge (from 80.0), Safari, Opera (from 56.0)
Ambient temperature	
• During storage and transport	-40 °C ... +70 °C (-40 ... +158 °F)
• During operation	-10 °C ... +40 °C (-40 ... +104 °F)
Humidity	< 95 %, without condensation
Rated voltage	24 V DC
Wireless technology and frequency range¹⁾	
• At 2.4G:	Wi-Fi 2400 MHz ... 2483.5 MHz
• At 5G:	Wi-Fi 5150 MHz ... 5250 MHz
Wireless modulation type	
• At 2.4G:	802.11 b/g/n
• At 5G:	802.11 a/n
Maximum output power (EIRP)	
• At 2.4G:	17.66 dBm
• At 5G:	14.50 dBm
Type of modulation	DSSS (DBPSK, DQPSK, CCK), OFDM (BPSK, QPSK, 16QAM, 64QAM)
Maximum wireless communication distance	50 m (164 ft)
Maximum antenna gain	
• At 2.4G:	1.2 dBi
• At 5G:	1.6 dBi
Maximum radio frequency output power	
• At 2.4G:	18 dBm
• At 5G:	15 dBm
Degree of protection	IP20/UL Open Type
Dimensions	
• Width	30 mm (1.18 in)
• Height	200 mm (7.87 in)
• Depth	18 mm (0.71 in)
Weight, approx.	0.032 kg (0.071 lb)
Compliance with standards	CE, UKCA, UL, CRC, IMDA, NBTC, KCC, NCC, ICASA, SDPPI, UkrCEPRO, JRF, RED, FCC, IC, WPC, ANATEL, TRA, MIC, SRRC, RCM, ENACOM, SUBTEL, MTC, SDOC, MOC

¹⁾ The actual frequency range may vary depending on market.

SINAMICS G210 standard converters

Supplementary system components

Memory cards

Overview



Sample memory card SINAMICS SD card

The parameter assignment, firmware and licenses for a converter can be stored on the SINAMICS SD memory card. When service is required, e.g. after the converter has been replaced and the data have been downloaded from the memory card the drive system is immediately ready for use again.

The memory card has the following functions:

- Parameter settings can be written from the memory card to the converter or saved from the converter to the memory card
- The memory card supports series commissioning without the use of a commissioning tool
- If firmware is stored on the memory card, the firmware can be upgraded/downgraded during startup
- It is used for storing licenses when using functions under license, e.g. the safety license for enabling the Extended Functions

Notes:

In general, the converter can be operated without a memory card. However, it is necessary if licenses, such as the Extended Safety license, are required via memory card. The card must then remain permanently inserted.

Selection and ordering data

Description	Article No.
SINAMICS SD card	
8 GB	
Parameter assignments, firmware and licenses for a converter can be stored on the memory card.	
• Empty	6SL5970-0AA00-0AA0
• With firmware V6.7	6SL4370-1GH00-0AA0

More information

Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL must be assigned to each use and must be kept in a safe place.

Electronic Certificate of License


The electronic Certificate of License is the paperless delivery form for SINAMICS Drive Software Options.

Like the previous paper Certificate of License CoL, the electronic Certificate of License contains information about the type of rights of use purchased for the software. The electronic Certificate of License is supplied as a PDF file via the Online Software Delivery Portal (OSD). This enables quick notification with a download link to the email address to be stated in the order.

The electronic Certificate of License can then be downloaded from the OSD. The Web License Manager can also be called from the OSD to assign the SINAMICS Drive Software Options (licenses) to a memory card and the converter. In this case, the data of the electronic Certificate of License are automatically transferred to the Web License Manager and do not have to be entered manually. This ensures quick availability of the license key and simple and secure handling and management of the license certificates.

You will find information on the OSD at:

<https://support.industry.siemens.com/cs/document/109759444>

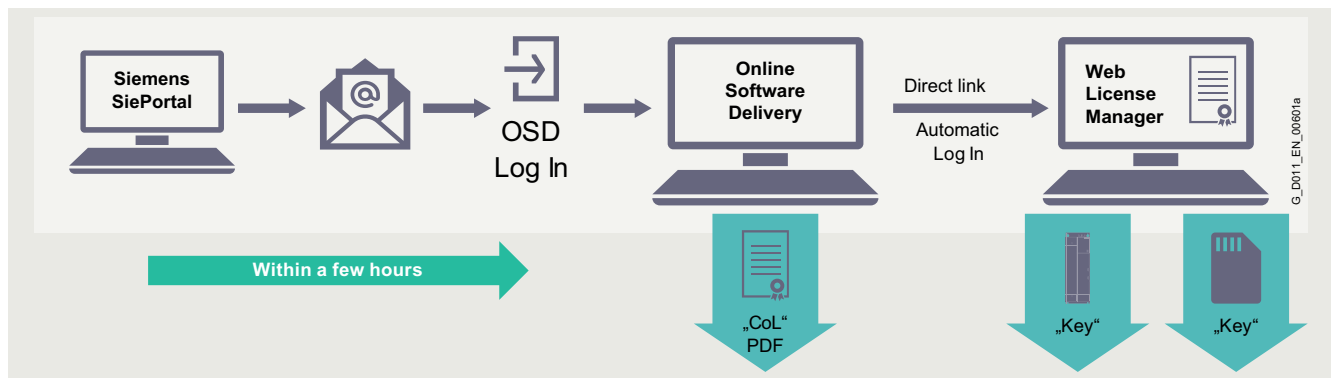

Electronic Certificate of License: Procedure for order licenses

Options for Licensing SINAMICS Drive Software Options (Licenses)

To use the license-requiring functions—the so-called SINAMICS Drive Software Options – on SINAMICS converters, the correct assignment of an electronic license certificate is required. Two options are available:

1. Licensing via the SINAMICS memory card

- Assignment:
The license certificate is bound to a SINAMICS memory card..
- Use:
The license key is stored on the memory card. The memory card must be inserted for the converter to operate.
- Ordering:
 - Preinstalled licenses can conveniently be ordered together with the memory card using the Z options.
 - Alternatively, the license can be added at a later time. To do so, simply order the desired license certificate and assign it manually via the memory card's Web License Manager. Then transfer the generated license key to the memory card using SINAMICS Startdrive or the web server.

2. Licensing directly on the SINAMICS converter

- Assignment:
The license certificate is bound directly to the SINAMICS converter.
- Use:
The license key is stored in the converter itself, so no additional SINAMICS memory card is required.
- Ordering:
Order the license certificate separately and assign it manually to the converter via the Web License Manager. Then transfer the generated license key to the converter using SINAMICS Startdrive or the web server.

Both options allow the license-requiring functions of SINAMICS converters to be used easily and conveniently. Select the option that best suits your application.


Pre-licensed memory cards are supplied together with the electronic Certificates of License. The Certificates of License are stored in the "KEYS" directory on the memory card.

SINAMICS G210 standard converters

Supplementary system components

Memory cards

More information (continued)

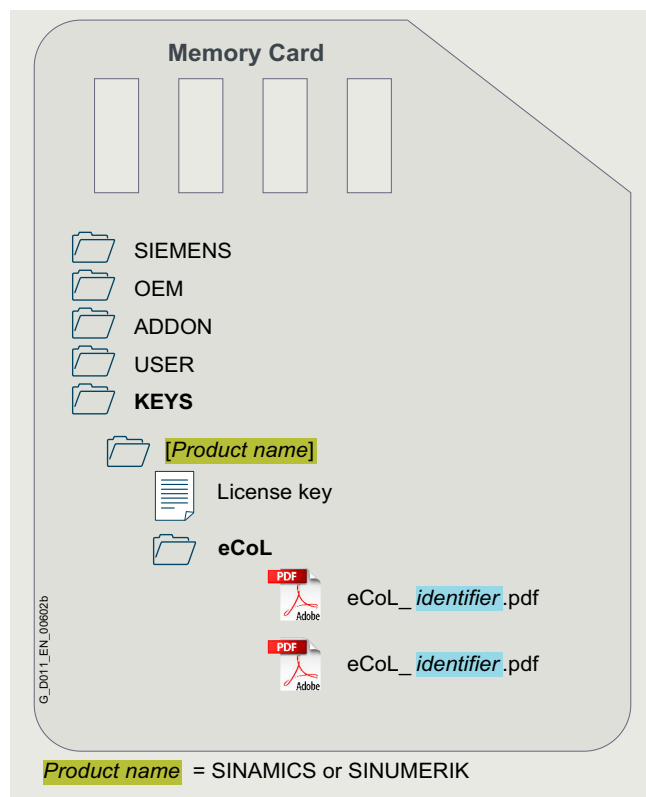

Electronic Certificate of License: Storage location on data medium

SINAMICS G210 standard converters

Supplementary system components

SINAMICS Drive Software Options

Options

SINAMICS Drive Software Options (licenses)

The SINAMICS Drive Software Options offer a flexible way to expand the range of functions of SINAMICS frequency converters in a targeted manner. Many functions are already included in the standard scope, but additional software options can further increase performance. These options enable the use of special additional functions, such as „SINAMICS Safety Integrated Extended“, which offers extended safety functions compared to the basic version.

A major advantage lies in the easy expandability: The options can be ordered directly when purchasing the frequency converter together with the memory card or at a later date. This offers maximum flexibility, especially if it is not clear at the beginning which functions are actually needed.

Overall, the SINAMICS Drive Software Options enable a needs-based, scalable and future-proof solution for a wide variety of industrial applications – from simple control tasks to complex safety and automation solutions.

The following are the SINAMICS Drive Software Options for the next generation of SINAMICS converters SINAMICS G210.

SINAMICS Drive Software Options (licenses)	Low voltage Standard Performance converters SINAMICS G210 V6.7 Article No.
Current firmware ¹⁾ Description	
Motor Control Functions	- Standard functionality with current firmware - No additional SINAMICS Drive Software Options (licenses) available
Technology Functions	
- SINAMICS Positioning Extended - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-2EA0 6SL5970-0AA00-0AA0-Z E01 6SL4370-1GH00-0AA0-Z E01
- SINAMICS Positioning Advanced - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-3EA0 6SL5970-0AA00-0AA0-Z E02 6SL4370-1GH00-0AA0-Z E02
- SINAMICS Drive Control Chart Extended - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-2FA0 6SL5970-0AA00-0AA0-Z J03 6SL4370-1GH00-0AA0-Z J03
- SINAMICS Drive Control Chart Advanced - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-3FA0 6SL5970-0AA00-0AA0-Z J04 6SL4370-1GH00-0AA0-Z J04
- SINAMICS Vibration Suppression Extended - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-7EA0 6SL5970-0AA00-0AA0-Z E14 6SL4370-1GH00-0AA0-Z E14

Options (continued)

SINAMICS Drive Software Options (licenses)	Low voltage Standard Performance converters SINAMICS G210 V6.7 Article No.
Current firmware ¹⁾ Description	
Safety Integrated Functions	
- SINAMICS Safety Integrated Extended - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-2HA0 6SL5970-0AA00-0AA0-Z F01 6SL4370-1GH00-0AA0-Z F01
Connectivity functions	
- SINAMICS OPC UA Single Extended - Supplied without memory card in electronic form (eCoL) - Supplied with memory card SINAMICS SD-Card, empty (without firmware) - Supplied with memory card SINAMICS SD-Card, with current firmware	✓ (from V6.7) 6SL5977-0AA00-1GA0 6SL5970-0AA00-0AA0-Z H80 6SL4370-1GH00-0AA0-Z H80

¹⁾ Overview and further information on all available firmware versions can be found here:
<https://support.industry.siemens.com/cs/document/109999225>

Note:

For enhanced flexibility and streamlined management, multiple licenses for various SINAMICS drives functionalities can be combined during the purchasing process. These combined licenses are then stored and activated on a single Memory Card, providing a consolidated licensing solution for your drive system. An example of such a combined license configuration for SINAMICS G210 is:
6SL4370-1GH00-0AA0-Z F01+H80

More information

Further information about SINAMICS Drive Software is available on the internet at:

www.siemens.com/sinamics-drive-software

For more information on ordering and configuration, see catalog D 99 and SiePortal at:

www.siemens.com/d99

www.siemens.com/sinamics-drive-software/sieportal

SINAMICS G210 standard converters

Safety Integrated for SINAMICS G210

Overview



The SINAMICS G210 converter features Safety Integrated Functions as standard.

Safety Integrated overview

The Safety Integrated Functions are implemented electronically and therefore offer short response times and easy handling in comparison to solutions with externally implemented monitoring functions.

The integrated safety functions comply with the requirements of SIL 3 according to IEC 61508 and IEC 61062 and PL e/category 4 according to ISO 13849-1.

No additional license is required for the Basic Functions STO, SS1-t, SS1E-t and SMT. One Safety Extended Runtime license per device is required for the Extended Functions SS1-r, SS1-a, SS1E-r, SS1E-a, SLS, SSM and SDI.

Use of the Basic Functions does not require a motor encoder, but use of the Extended Functions does require an asynchronous or synchronous reluctance motor. A safety-compatible encoder is not required.

Controlling the Safety Integrated Functions

The Safety Integrated Functions are completely integrated into the drive system. They can be activated via fail-safe digital inputs or via PROFINET or PROFIBUS (with optional CM-DP Communication Module) with PROFIsafe.

The SINAMICS G210 converter has a fail-safe digital input.

The STO function in the converter is released ex works, and is assigned to the fail-safe digital input F-DI 0. When wiring an emergency stop operating device, the STO function can therefore be used right away with no additional configuration. The F-DI 0 is delivered with a bridge, meaning that the drive can be operated even without wiring an emergency stop operating device.


To comply with the requirements of ISO 13849-1 and IEC 61508 for timely error detection, the fail-safe input and switch-off signal paths of the SINAMICS G210 are tested cyclically and automatically during operation. A test stop and consequent shutdown of the drive is therefore not necessary for error detection.

Overview (continued)

OM-SMT Option Module Safe Motor Temperature



SINAMICS G210 OM-SMT Option Module Safe Motor Temperature

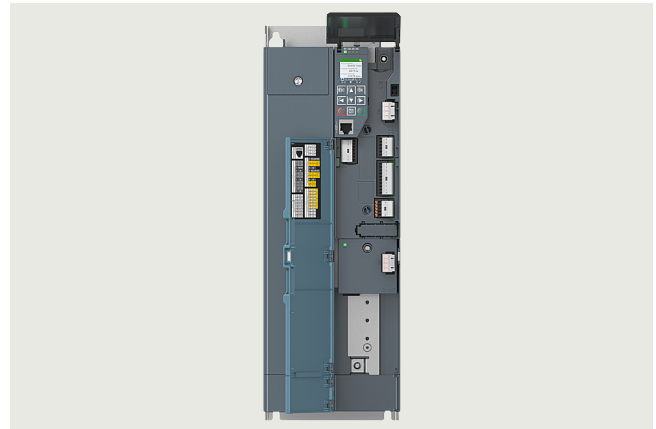

Integrated safety solution: SINAMICS G210 with inserted OM-SMT Option Module Safe Motor Temperature

The Option Module OM-SMT (Safe Motor Temperature)

- is suitable for monitoring the temperature of a motor in an explosive atmosphere (ATEX applications).
- is required for the SMT (Safe Motor Temperature) safety function.
- monitors the temperature of motors with two connected PTC temperature sensors for a warning threshold and a shutdown threshold.
- also detects short-circuits and wire breaks in the sensor circuit.
- detects when the limit temperature is exceeded. Once the shutdown threshold is reached, the converter automatically triggers the STO stop function, which prevents the motor from receiving any more energy from the converter; and the temperature can no longer rise.
- is classified for EX II (2) GD. Shutdown is certified for ATEX to SIL 2 in accordance with IEC 61508 and IEC 61062 and PL d, category 3 in accordance with ISO 13849-1.
- is intended for operation in the option slot of the converter. Operation is possible in converters with degree of protection IP20 / UL Open Type and IP55 / UL Type 12.

SINAMICS G210 standard converters

Safety Integrated for SINAMICS G210

Function

Function	Control	Underlying function	Reaction to limit overshoot	Encoder required	License required
Basic functions (no additional license is required)					
STO	• F-DI • PROFIsafe	–	–	No	No
SS1 time-controlled	• F-DI • PROFIsafe	Following expiry of the parameterized delay time	–	No	No
SS1E time-controlled	• F-DI • PROFIsafe	Following expiry of the parameterized delay time	–	No	No
SMT	–	When STO limit temperature exceeded	STO	No	No
Extended functions (an additional license is required)					
SS1 with SBR/SAM	• F-DI • PROFIsafe	Safe Acceleration Monitor (SAM) or Safe Brake Ramp (SBR) during braking. Following expiry of the parameterized delay time or if the speed falls below the minimum speed limit STO	STO	No	Yes
SS1E with SBR/SAM	• F-DI • PROFIsafe	Safe Acceleration Monitor (SAM) or Safe Brake Ramp (SBR) during braking. Following expiry of the parameterized delay time or if the speed falls below the minimum speed limit STO	STO	No	Yes
SLS	• F-DI • PROFIsafe	–	STO, SS1, SS1E (can be parameterized)	No	Yes
SDI	• F-DI • PROFIsafe	–	STO, SS1, SS1E (can be parameterized)	No	Yes
SSM	• F-DI • PROFIsafe	–	Signals that the speed has fallen below a specified value	No	Yes

Selection and ordering data


Description	Article No.
Delivery in electronic form, eCoL (without memory card)	
SINAMICS Safety Integrated Extended (license)	6SL5977-0AA00-2HA0

SINAMICS G210 standard converters

Security Integrated Functions

Overview

SINAMICS Security Integrated

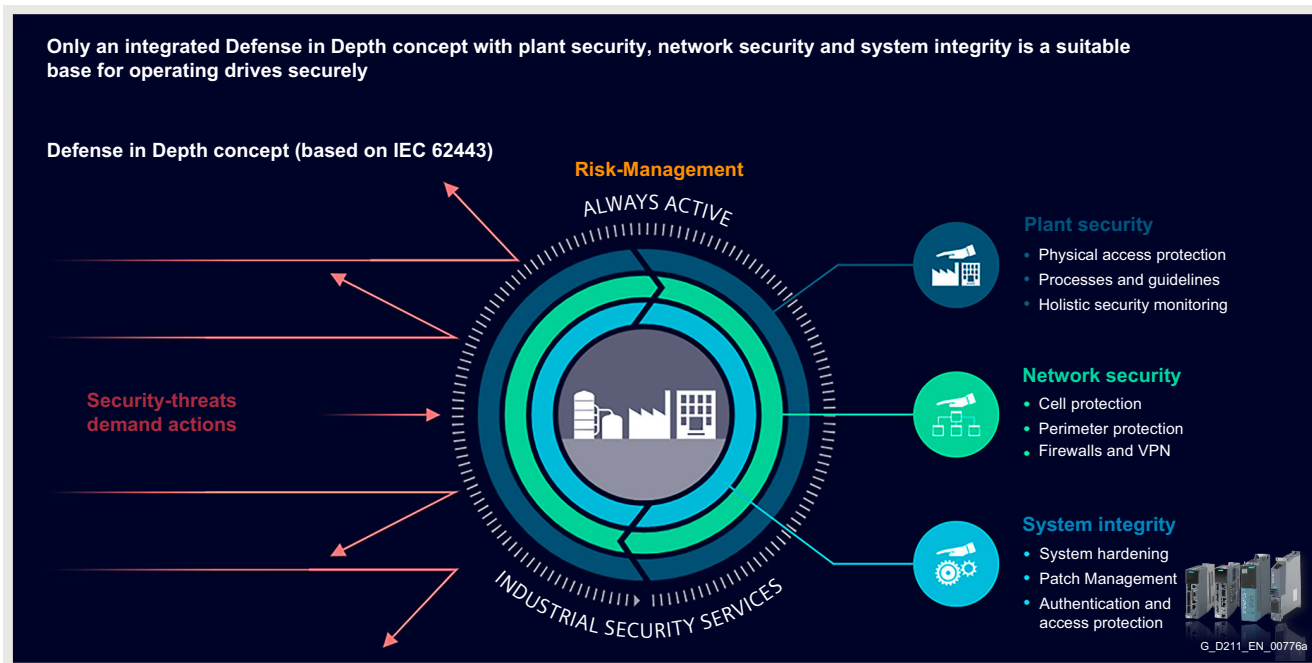

The increasing digitalization and networking of industrial plants (IT/OT convergence) raises the risk of cyber attacks. Therefore, infrastructures must be protected end-to-end – from the corporate IT level down to the field level.

SINAMICS converters are used at the field level. For use in next-generation security and network architectures, they already have the necessary security functions integrated.

Risk Management and Defense-in-Depth

The foundation for a secure machine or plant is a continuous risk management process. This process follows a clear structure: First, potential risks are identified and analyzed. Then, appropriate measures to mitigate these risks are defined and implemented. A final security audit ensures that the risks have been effectively reduced or eliminated.

A key component of these measures is the Defense-in-Depth concept. This multi-layered security approach consists of several coordinated protection levels that work together to provide comprehensive protection against cyber attacks.

Plant security

Unauthorized persons may be able to enter the production site/building and damage or alter production equipment as a result of vulnerabilities in a company's physical security. Confidential information can also be lost. Company locations and critical production units must therefore be protected using suitable measures.

Network security through cell protection

One of the things that the Defense in Depth concept provides is that production plants are segmented into secured cells. The cells contain automation and drive products such as SINAMICS frequency converters. Communication with the individual cells is protected by so-called cell protection, e.g. SCALANCE S products, which by default does not allow communication in and out of the cell. For communication across cell boundaries, a risk analysis must be carried out. It must only be done for dedicated protocols to dedicated devices.

Patch management

Siemens offers a targeted hotfix/patch management system and communicates security vulnerabilities and patches via Siemens ProductCERT. Customers can be automatically informed when new advisories are available for the products they use. Standardized interfaces are also available for automatically interfacing with customer-specific tools.

Security Integrated functions

SINAMICS frequency converters of the next generation (from firmware V6.1) have Security Integrated functions as standard.

Secure default settings

The converters are delivered from the factory with security functions activated, yet in such a way that allows for a user-friendly first commissioning. When configuring the converter in TIA Portal or via the SINAMICS web server, the user is automatically guided through a security wizard to adjust the most important security settings. Among other things, this determines whether the converter should be protected by user administration and access control.

User management and access control

This function makes it possible to create various users and protect their access to the converter with passwords. Each user is assigned one or more roles. Various rights can be assigned to each role. There are various rights, both for offline configuration as well as for online access to the device. In this way, it is possible to set which users have full access to the device's settings and which users only receive limited rights. For example, you could create users who only have read access for diagnostic purposes or users who have write access to the device settings but no rights to change the safety configuration.

TIA Portal provides cross-device user administration. Users and rights can be configured in the TIA Portal at a central location in the project across devices for SINAMICS converters, SIMATIC HMI Panels, SIMATIC PLCs, and for the TIA Portal project engineering. This means that settings for users and rights can be made and changed consistently and rapidly for multiple devices.

Overview (continued)

Protected communication with engineering systems (SINAMICS Startdrive and SINAMICS web server)

The converters enable TLS-based communication between the converter and the TIA Portal (secure S7 protocol Startdrive) and to web clients (https protocol).

Protected communication for integration into digitization use cases

For integration into digitalization use cases, the converters support OPC UA communication. [For more information, see the "Connectivity functions" section.](#)

Firmware integrity and authenticity

The Siemens-provided firmware of the converters is equipped with integrity and authenticity protection and is signed by Siemens. Through this, the converter can detect when installing a new firmware, whether it has been tampered with by a third party and whether it comes from a trusted source.

Firmware updates can be carried out via memory card, TIA Portal and web clients.

Backup and restore

The configuration of the converters can be backed up and restored remotely via the SINAMICS web server, SINAMICS Startdrive or locally via the SD card. Creating a backup after changes is an important step of a comprehensive security concept. This means that the converter can be quickly restored to a known state in the event of a cyber attack.

Restoring the backup file can also be used to provide the new converter with the desired configuration when replacing an existing converter.

Protection of data in backup files

Passwords are stored in backup files not in plain text, but as a hash value or key. In addition, the data for user management and access control can be stored in encrypted form via the "driva data encryption" feature.

In addition, the backup files have integrity protection and optionally authenticity protection. The authenticity protection detects tampering and can prevent backup files from being imported from untrusted sources.

Session handling

The converters feature session handling. A session starts as soon as a user logs in to the device and ends when the user logs out manually or after a preset period of inactivity. Session handling ensures that each user only receives the access rights that are assigned to him, even if multiple users with different rights are connected to the device at the same time.

Logging of security events

Security-relevant events can be logged locally (from V6.7) as well as sent to a syslog server (from V6.4).

Physical access protection

Access to the SINAMICS SDI (Smart Drive Interface) and SD card slot of the SINAMICS G210X/G220 degree of protection IP55 drives can optionally be locked with a padlock. This prevents configurations from being changed directly on the device by unauthorized persons

Certified Security

Life cycle for safe product development

The development of the SINAMICS converters meets the requirements of IEC 62443-4-1:2018.

Integrated Security Features

The integrated security features are certified by UL Solutions according to IEC 62443-4-2 Security Level Capability 2 (SL-C 2).

Security documentation

The configuration manual SINAMICS Industrial Cybersecurity provides comprehensive documentation of security basics and security functions of the drives:

<https://support.industry.siemens.com/cs/ww/en/view/109999221>

Further information is available on the internet at:

www.siemens.com/sinamics-cybersecurity

SINAMICS G210 standard converters

SINAMICS web server for SINAMICS G210

Overview


Web server for efficient commissioning, diagnostics, maintenance and operator control and monitoring, any time, from anywhere

Thanks to the web server, the SINAMICS G210 drive system offers efficient commissioning, diagnostics, maintenance options as well as operation and monitoring functions. The user is supported by a help function and additional links to specific product information, downloads, FAQs and manuals.

The web server provides access to a multi-faceted range of new options for commissioning or parameter assignment, drive diagnostics, remote maintenance as well as operator control and monitoring for any networked PC with a web browser or for tablets and smartphones (wired connection or wireless connection via a separate WLAN access point, such as SINAMICS Smart Adapter).

The following provides an insight into the functionality offered.

- Drive type, connected motor as well as the article number and installed firmware
- Important drive parameters show the operating state (can be configured)
- The connection overview provides information about the status of the connections (operating unit - converter - motor)
- Overview of all pending faults and warning messages

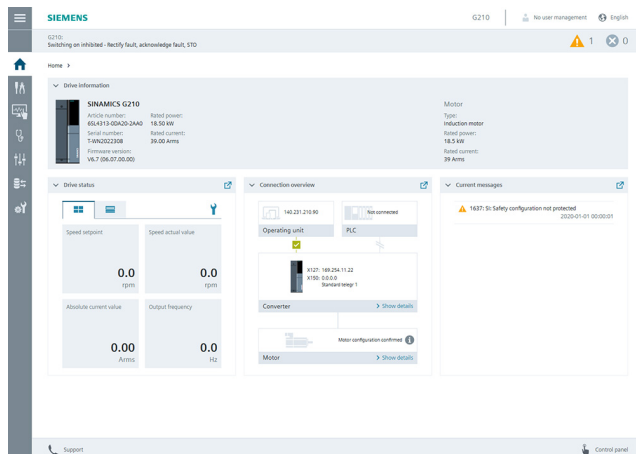


Start screen of the web server integrated into SINAMICS G210


Commissioning

- In the quick setup, the most important drive characteristics are defined, e.g. motor data, limit values and the configuration of the inputs and outputs. If a motor-side filter is installed, the advanced setup has to be used.
- In the advanced setup, drive options and functions are defined to suit your application. The advanced setup includes all the settings of the quick setup as well as additional options and functions.
- Safety Integrated commissioning guides you through the commissioning of the Safety Integrated functions of the converter.


Overview (continued)

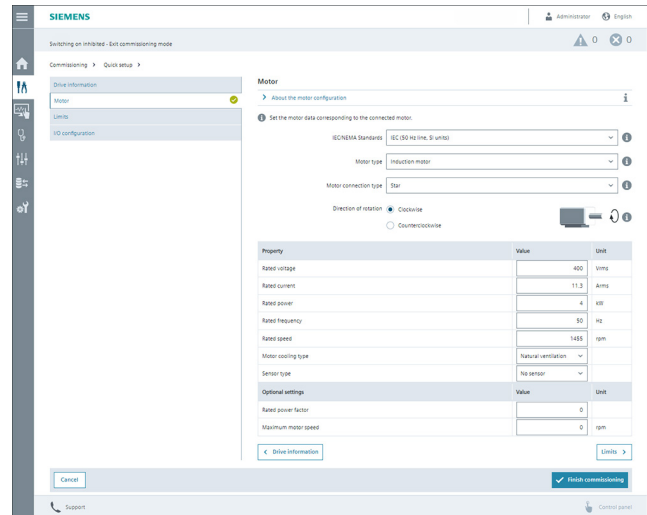

Quick setup with open dialog showing the set motor data

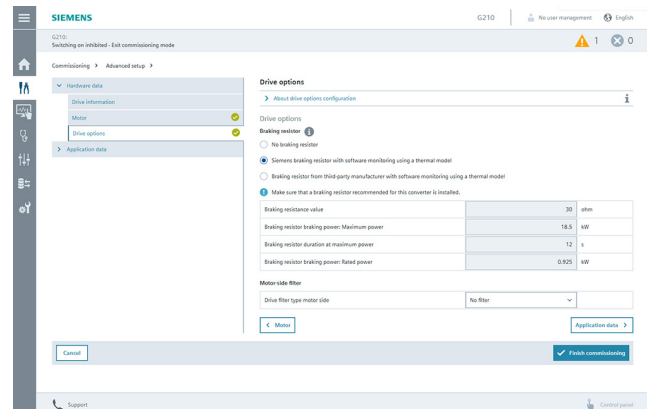

Advanced setup with open dialog for the line/drive options

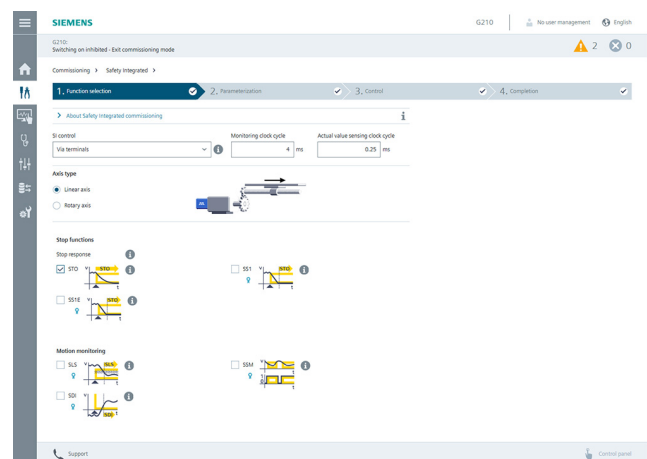

Safety Integrated assistant


SINAMICS G210 standard converters

SINAMICS web server for SINAMICS G210


Overview (continued)

Operator control and monitoring

- Configurable drive status with value or trend display
- Status of the inputs and outputs
- Drive traversing via the control panel, which can be freely positioned on the screen
- Switch smoothly between Automatic and Manual mode via the Manual operation

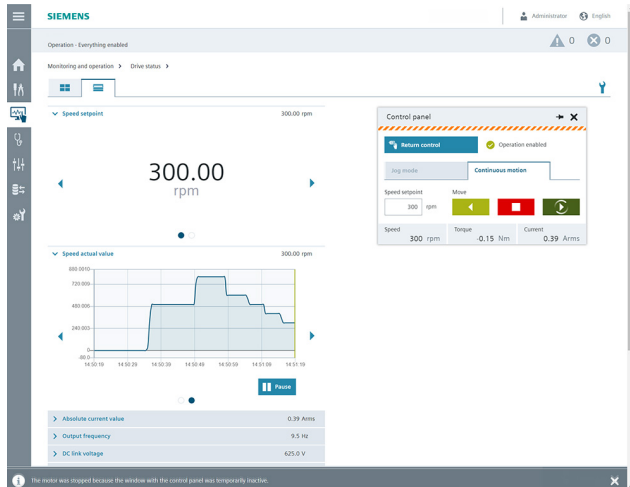

Operator control and monitoring of the drive with the help of the drive status and control panel

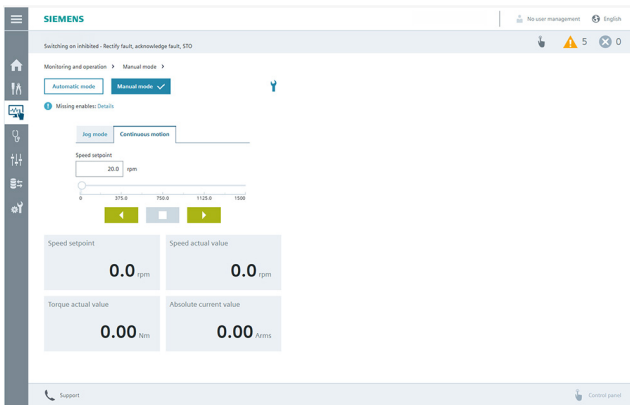


Switch smoothly between Automatic and Manual mode via the Manual operation


Diagnostics

- Evaluation of warnings and fault messages
- Evaluation of system events (diagnostic buffer)
- Analysis of the safety status
- Connection overview, diagnostics of the drive communication and control and status words
- Trace: Data logging and visualization for in-depth analysis

Overview (continued)

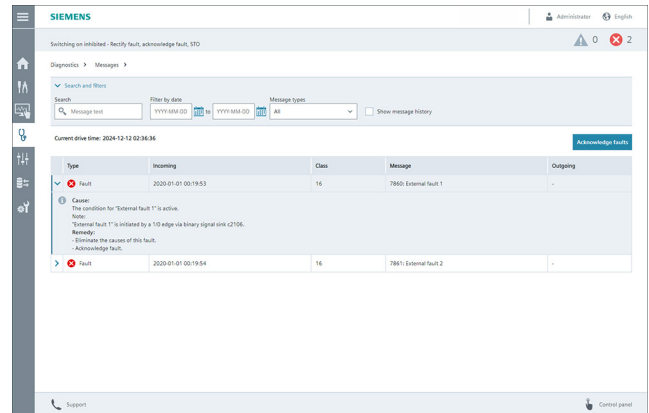

Alarm view with convenient search and filter functions

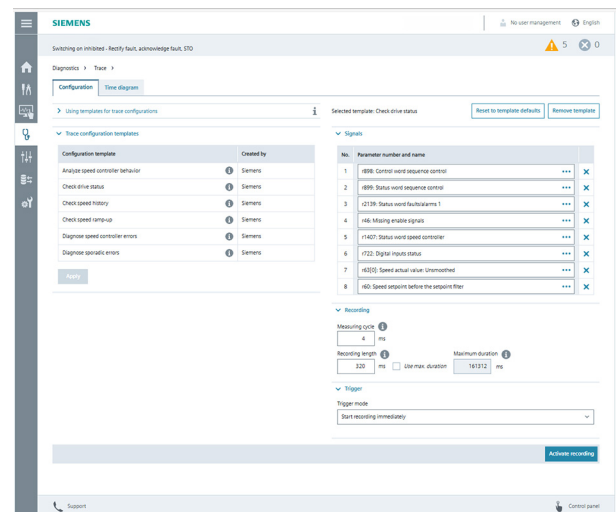

Trace configuration to apply trace templates and set recording conditions

Support

- Support

Support

Diagnostics report

Links to the Siemens Industry Online Support

General links

Product page SINAMICS G210

Siemens Industry Online Support - Home

Product-specific links for SINAMICS G210

Product Support

FAQs

Software downloads

Manuals / Operating instructions

Test certificates / certificates

Product note

Link to product information

Component-specific QR codes

Component

Converter



Type: G210

Article number: 6SL4313-6CA20-2AA0

Serial number: T-WN022308

Close

Benefits

Simple and fast commissioning

- Installation of additional commissioning software is not required. Tools required for the commissioning are ready to use via the integrated web server.
- Standard pages to set thresholds and onboard inputs
- Guided parameterization of Safety Integrated functions
- Extensive online help with context-sensitive access to the Operating Instructions (memory card required)

Shorter machine downtimes

- Quick overview of the current configuration and the state of the drive
- Efficient diagnostics and maintenance
- Understandable diagnostic information and messages, including the causes of issues and possible remedies, are displayed in plain text in multiple languages
- Context-sensitive help with optional access to the web-based device documentation provides quick help with questions about drive functions

Convenient service and maintenance functions

- Quick backup and restoration of the drive data
- Convenient firmware update, also via the network
- Convenient access to drive parameters and their signal interconnections
- User-defined parameter lists that focus on what matters
- Easy and efficient handling of the parameter list by using search functions and filters (e.g. parameter groups, parameter types)
- Easy exchange with operating personnel by importing/exporting user-defined parameter lists.
- User-defined parameter lists can be exchanged between the SINAMICS Startdrive and the web server.
- The generation and dispatch of a diagnostics report supports communication with service personnel or machine builders.

Direct language selection

- English, French, German, Italian, Spanish, Chinese Simplified

Accessibility

- Via all LAN or PROFINET interfaces
- Use of mobile devices (e.g. notebooks/tablets and smartphones) via WLAN e.g. with SINAMICS Smart Adapter or a separate access point
- Access to the web server via PCs/notebooks, SIMATIC HMI (> 10"), smartphones/tablets with a Chromium-based internet browser or Safari

Access security

- Protection against unauthorized access to the drive functions and data
- Convenient user administration that supports a roles concept
- Easy set-up and management of user accounts


Application

The web server is ideal for applications not requiring any special commissioning software or version dependencies. Commissioning, diagnostics and maintenance as well as operator control and monitoring are possible both locally and remotely, provided appropriate security measures are applied.


SINAMICS G210 standard converters

SINAMICS web server for SINAMICS G210


Integration

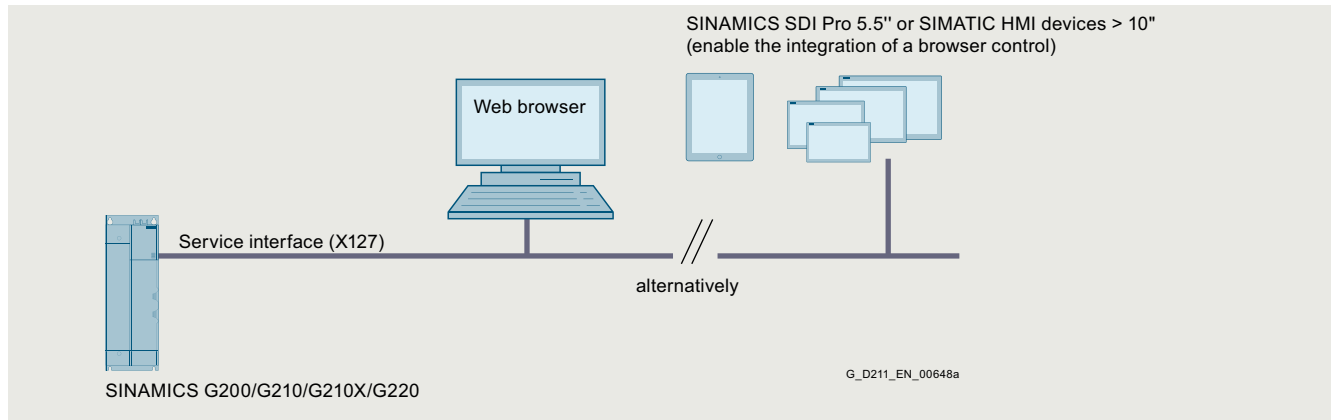


Integration of the SINAMICS web server based on the example of a SINAMICS G200/G210/G210X/G220 and the service interface (X127)

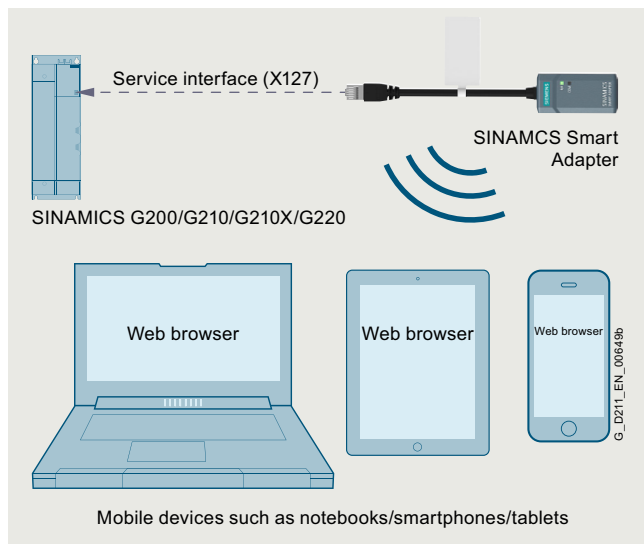

Wireless access to the web server via the service interface (X127) of the SINAMICS G200/G210/G210X/G220 with the help of the SINAMICS Smart Adapter

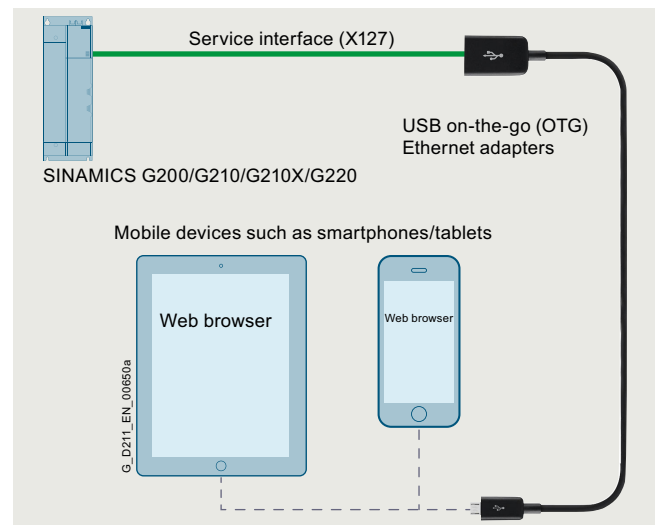

Access to the web server via the service interface (X127) of the SINAMICS G200/G210/G210X/G220 with the help of a USB on-the-go (OTG) Ethernet adapter

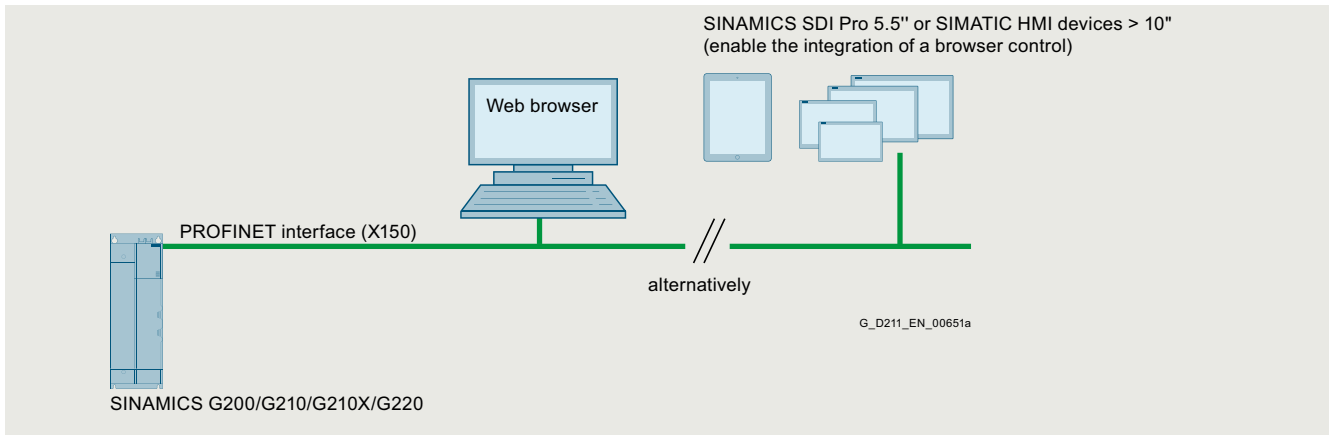Integration (continued)

Integration of the SINAMICS web server based on the example of a SINAMICS G200/G210/G210X/G220 and the PROFINET interface (X150) as connected web client (e.g. PC, SIMATIC HMI etc.)


SINAMICS G210 standard converters

SINAMICS Startdrive commissioning tool

Overview

SINAMICS Startdrive is integrated in the TIA Portal and is a tool for the configuration, commissioning and diagnostics of the SINAMICS family of converters.

The SINAMICS Startdrive commissioning tool has been optimized with regard to user friendliness and consistent use of the TIA Portal benefits of a common working environment for PLC, HMI and drives. Time-saving and guided step-by-step commissioning with maximum flexibility is complemented by user-friendly graphic function views for all drive functions, including functional safety (Safety Integrated) and drive-based technology functions (e.g. EPOS). The automatic message display, the powerful real-time trace and the context-sensitive online help make converter diagnostics very easy.

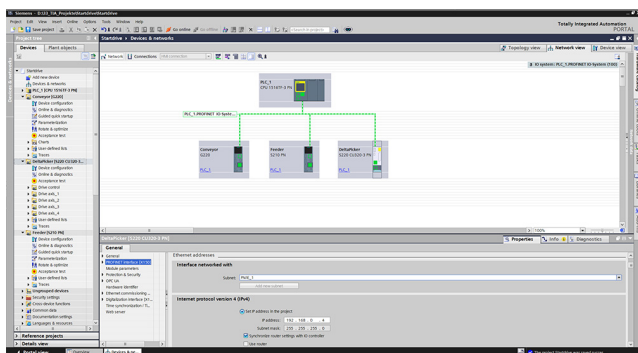

The software packages based on the TIA Portal are harmonized with each other and offer important benefits, the main advantage being a shared project storage. The TIA Portal enables simple integration of SINAMICS converters in your automation solution. Thanks to the standardization of operator actions and the integration in general TIA Portal operating concepts (e.g. UMAC, Openness) as well as standard TIA Portal functions (e.g. Undo/Redo), familiarization is easy both for drive experts as well as SIMATIC users. Special focus is placed on the interaction between SIMATIC and SINAMICS, especially when connecting the SINAMICS drives to SIMATIC technology objects.

Integration

Supported frequency converters

SINAMICS Startdrive Basic enables complete commissioning, diagnostics, parameterization, optimization and connection to the PLC for the following SINAMICS converters integrated in SINAMICS Startdrive:

- SINAMICS G120, G120C, G120D, G120P
- SINAMICS G115D
- SINAMICS G130, G150
- SINAMICSG200 ¹⁾
- SINAMICSG210, G210C, G210X ¹⁾
- SINAMICS G220
- SINAMICS S120, S150
- SINAMICS S200
- SINAMICSS200 Spindle ¹⁾
- SINAMICS S210 (6SL3...) and innovated SINAMICS S210 (6SL5...)
- SINAMICS S220
- SINAMICS MV

¹⁾ As of SINAMICS Startdrive V21 Update 1.

SINAMICS Startdrive Advanced

With SINAMICS Startdrive Advanced (available as of V15) you benefit from powerful engineering functions that save you considerable time and ultimately costs.

- Safety acceptance test:
 - Guided acceptance test wizard for all drive-based Safety Integrated functions
 - Automatic and safety function-specific generation of traces to analyze the machine behavior
 - Generation of an acceptance report as Excel file (xlsx format, can also be used with OpenOffice)
- Improved optimization options in the drive: Extended measuring functions (available for CU320-2 PN/DP and CU310-2 PN as of V5.2 SP3 and all devices from V6.x), long-term trace (available for CU320-2 PN/DP and CU310-2 PN from V5.2 SP3)
- Export of backup files from the Startdrive project
- Import of backup files into the Startdrive project
- Also contains all Startdrive Basic functions
- Only license key required, no additional installation

New in V21

Startdrive Basic V21

- Comparison of drive parameters for up to 5 drives
- Offline firmware upgrade as a mass operation
- Download in the background
- Integration of the drive version V6.6 for SINAMICS G220, S220, G200 Basic
- Integration of the drive version V6.7 for SINAMICS G200, G210, G210C, G210X, G220, S200, S200 Spindle, S220
- Support of the virtual motor encoder for encoderless positioning on SINAMICS G210, G220 and S220

Integration (continued)**Startdrive Advanced V21**

- Import of backup files as station upload to the Startdrive project (from V21 Update 1)

Installation versions

SINAMICS Startdrive can only be installed as an option package for SIMATIC STEP 7. However, a SIMATIC STEP 7 license is not required to run SINAMICS Startdrive.

System requirements

The following table shows the recommended hardware and system equipment for the operation of SINAMICS Startdrive.

Hardware	Recommendation
Computer	As of SIMATIC FIELD PG M6 Comfort (or comparable PC)
Processor	Intel Core i5-8400H (2.5 ... 4.2 GHz; 4 cores + hyper-threading; 8 MB Smart Cache)
RAM	16 GB or more (32 GB for large projects)
Hard disk	SSD with at least 50 GB available memory
Screen resolution	15.6" Full HD display (1920 × 1080 or larger)
Operating systems	• Microsoft Windows 10 (64 bit) - Windows 10 Enterprise 21H2 • Microsoft Windows 11 (64 bit) - Windows 11 Home Version 24H2 - Windows 11 Professional Version 24H2 - Windows 11 Enterprise 24H2, 23H2 • Microsoft Windows Server (64 bit) - Windows Server 2022 Standard (full installation) - Windows Server 2025 Standard (full installation)

Compatibility with other products

- SINAMICS Startdrive V21 operates with STEP 7 and WinCC V21 in one framework
- SINAMICS Startdrive V21 can be installed on the same computer in parallel with other versions of SINAMICS Startdrive V12 to V20
- SINAMICS Startdrive can be installed on the same computer as SINAMICS MICROMASTER STARTER

Supported virtualization platforms

SINAMICS Startdrive can be installed in a virtual machine. For this purpose, one of the following virtualization platforms in the specified version or a newer version can be used:

- VMware vSphere Hypervisor (ESXi) 8.0 or higher
- VMware Workstation 17.0 or higher
- VMware Player 17.0 or higher
- Microsoft Hyper-V Server 2019 or higher

Supported safety programs

The following safety programs have been tested with SINAMICS Startdrive V21:

Integration (continued)

• Virus scanners:

- Symantec Endpoint Protection 14.3 RU8
- Trend Micro Apex One
- McAfee Endpoint Security (ENS) 10.7
- Microsoft Defender
- Qihoo 360 (Safe Guard and Virus Scanner)
- CrowdStrike Falcon Go (Falcon Prevent and Falcon Device Control)

• Encryption software:

- Microsoft Bitlocker

• Host-based Intrusion Detection System

- McAfee Application Control 8.4 (Trellix)

SINAMICS G210 standard converters

SINAMICS Startdrive commissioning tool

Selection and ordering data

Description	Article No.
SINAMICS Startdrive Basic V21 commissioning tool Single license and certificate of license English, French, German, Italian, Spanish, Chinese Simplified • Software download (email address required for delivery)	6SL3072-4MA02-0XG0
SINAMICS Startdrive Advanced V21 commissioning tool License key (floating license) English, French, German, Italian, Spanish, Chinese Simplified • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3072-4MA02-0XA5 6SL3072-4MA02-0XG5
Upgrade SINAMICS Startdrive Advanced V15 ... V20 to V21 • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3072-4MA02-0XE5 6SL3072-4MA02-0XK5
Software Update Service with SINAMICS Startdrive Advanced in the TIA Portal Delivery is performed according to the number of ordered SUS products (e.g. 10 upgrade license keys (floating license) with 10 USB flash drives, etc.) • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3072-4AA02-0XL8 6SL3072-4AA02-0XY8

Note:

SINAMICS DCC can be installed in addition to the SINAMICS Startdrive commissioning tool. This allows the device functionality in the SINAMICS drive system to be expanded with dedicated technological functions as required.

Further information on SINAMICS DCC can be found in the section "SINAMICS DCC (Drive Control Chart) in the TIA Portal" and the section "Drive Control Chart (DCC)" in the Technology Functions section for the SINAMICS Drive Software for the next generation of SINAMICS frequency converters (from firmware V6.4).

Accessories

Depending on the version of the Control Unit (CU), the Control Unit of the drive unit can communicate with the programming device (PG) or PC via PROFIBUS or PROFINET / Ethernet or via a serial interface. The following accessories are available for the particular drive system as listed in the following table.

Description		Recommended accessories For communication between the drive unit and the programming device or PC Article No.
SINAMICS frequency converters of the next generation (from firmware V6.1) • Wi-Fi	SINAMICS Smart Adapter Wi-Fi solution for the next generation of SINAMICS frequency converters of the next generation (from firmware V6.1)	6SL4950-0AJ00-0AA0
SINAMICS G120C • USB	PC converter connection kit 2 Mini USB interface cable for communication with a PC, 3 m (9.84 ft)	6SL3255-0AA00-2CA0
SINAMICS G120 • USB • PROFINET / Ethernet	PC converter connection kit 2 Mini USB interface cable for communication with a PC, 3 m (9.84 ft) Standard CAT5 Ethernet cable or PROFINET cable	6SL3255-0AA00-2CA0 –
SINAMICS G115D • USB • PROFINET / Ethernet	PC converter connection kit 2 Mini USB interface cable for communication with a PC, 3 m (9.84 ft) Connection to the PROFINET system in the plant	6SL3255-0AA00-2CA0 See supplementary products ¹⁾
SINAMICS G120D • USB • PROFIBUS • PROFINET / Ethernet	PC converter connection kit 2 Mini USB interface cable for communication with a PC, 3 m (9.84 ft) Connection to the PROFIBUS system in the plant Connection to the PROFINET system in the plant	6SL3255-0AA00-2CA0 See supplementary products ¹⁾ See supplementary products ¹⁾

¹⁾ An overview of all the supplementary products (e.g. cables and connectors) that are available for the distributed drives family can be found at the following link: <http://www.siemens.com/distributeddrives-supplementaryproducts>

More information


The SINAMICS Startdrive Basic commissioning tool is available free on the internet at www.siemens.com/startdrive

SINAMICS G210 standard converters

SINAMICS DCC (Drive Control Chart) in the TIA Portal

Overview

SINAMICS DCC (Drive Control Chart) is a technological expansion for the SINAMICS drive systems. This allows the device functions of the converter systems to be expanded individually and flexibly with freely available closed-loop control, arithmetic and logic blocks and thus opens up a new dimension of adaptation capabilities for the specific functions of the machine for the user. The user-friendly configuration tool in the TIA Portal enables simple, graphic configuration of these blocks and integrates them in the drive unit. SINAMICS DCC is available as an option for SINAMICS Startdrive Basic and Advanced in the TIA Portal.

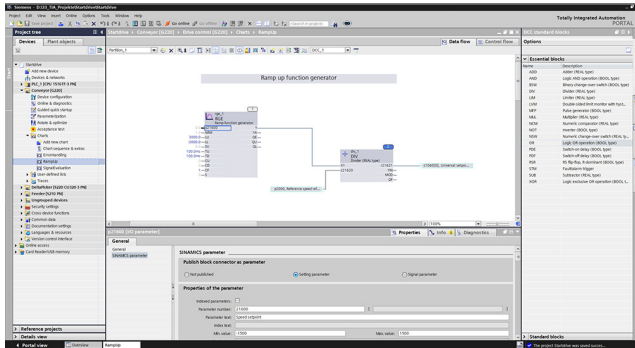

With the integration into the TIA Portal, the focus is on simple usability. For this reason, closed loop control and open loop control functions can be graphically interconnected in just a few steps via drag and drop.

The SINAMICS DCC installation contains a comprehensive standard block library. Furthermore, additional libraries can be installed as DCB Extension to expand the range of functions of the blocks. The diagnostics functions allow the program behavior to be verified and, in the case of a fault, the cause to be identified.

Via the Siemens application support, a range of example applications (winder, synchronous operation, cross-cutter, etc.) are available for download on the basis of SINAMICS DCC and can be used as a ready-to-use solution or be individually adapted or expanded.

www.siemens.com/sinamics-applications

Supported frequency converters

With SINAMICS DCC, you can flexibly and individually extend the following devices:

- SINAMICS G220 (as of drive version V6.4)
- SINAMICS G210, G210C, G210X (as of drive version V6.7) ¹⁾
- SINAMICS G200 (as of drive version V6.7) ¹⁾
- SINAMICS G200 Basic (as of drive version V6.6)
- SINAMICS G130, G150
- SINAMICS S120, S150
- SINAMICS MV
- SINAMICS S120 integrated in SIMATIC Drive Controller
- SINAMICS S220 (as of drive version V6.6)

¹⁾ As of SINAMICS DCC V21 Update 1.

Overview (continued)

New in V21

- Support of SINAMICS DCC with SINAMICS G220, G200 Basic and S220 from drive version V6.6
- Support of indexed DCC parameters from drive version V6.6
- Extension of user-specific SINAMICS DCC from drive version V6.6
- Support of SINAMICS DCC with SINAMICS G210, G210X and G200 from drive version V6.7

Licenses

With the support of SINAMICS DCC for SINAMICS G220 and S220 drive units, licensing becomes even easier and more flexible. While the SINAMICS DCC Combo engineering licenses are still required for the drive units with drive version V5.x (e.g. SINAMICS S120), SINAMICS DCC Engineering licenses are no longer required for the SINAMICS devices as of V6.x. Instead, the licensing depends on the scope of the SINAMICS DCC application.

For simple SINAMICS DCC applications with up to 20 modules, the SINAMICS DCC application can be used free of charge! For more extensive SINAMICS DCC applications, scalable SINAMICS Drive Software Options (licenses) are available, which are precisely tailored to the required needs.

In order to be able to project SINAMICS DCC with the V6.x drive version, the SINAMICS DCC V21 Basic product variant is required.

In the case of using SINAMICS DCC with the V5.x drive version, the SINAMICS DCC V21 Combo Floating License is required, which is offered in the product of the same name. The floating license allows the use of software on any number of computers. This allows one user per license to use the software independently of the computer being used or a specific workstation. The number of existing licenses determines the number of computers on which the software can be used simultaneously.

- Existing SINAMICS DCC combo licenses V15 ... V20 can be upgraded to V21. This requires an upgrade license.
- The combo license allows parallel use of SINAMICS DCC V3.3/V3.4/V3.5/V3.6/3.7 and SINAMICS DCC V21 if both tools are installed on the same PC.

Installation versions

SINAMICS DCC is an option package for SINAMICS Startdrive Basic and Advanced.

System requirements

The SINAMICS DCC V21 option package has the same system requirements and supports the same virtualization platforms and safety programs as SINAMICS Startdrive V21.

Compatibility with other products

- SINAMICS DCC V21 operates with Startdrive, STEP 7 and WinCC in one framework
- SINAMICS DCC V21 can be installed on a computer in parallel with SINAMICS MICROMASTER STARTER with SINAMICS DCC

Supported languages

- Standard installation: English, German, Chinese (simplified)
- Language packages: French, Italian, Spanish

SINAMICS G210 standard converters

SINAMICS DCC (Drive Control Chart) in the TIA Portal

Selection and ordering data

SINAMICS DCC in the TIA Portal, consisting of the graphical configuration tool and the standard library, is the continuation of SINAMICS DCC in the STARTER.

For drive versions V5.x, no runtime license is required for the standard library included in the scope of supply.

Description	Article No.
SINAMICS DCC V21 Basic Single License as an option package for SINAMICS Startdrive Basic or Advanced V21 for SINAMICS drives as of drive version V6.6 German, English, French, Italian, Spanish, Chinese Simplified • Software download (email address required for delivery)	6SL3070-4MA01-0XG0
SINAMICS DCC V21 for TIA Portal incl. Floating as an option package for SINAMICS Startdrive Basic or Advanced V21 Combo license key (floating license) German, English, French, Italian, Spanish, Chinese Simplified • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3070-4MA01-0XA5 6SL3070-4MA01-0XG5
Upgrade SINAMICS DCC V15.1 ... V20 to V21 • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3070-4MA01-0XE5 6SL3070-4MA01-0XK5
Software Update Service with SINAMICS DCC in the TIA Portal ¹⁾ Delivery is performed according to the number of ordered SUS products (e.g. 10 upgrade license keys with 10 USB flash drives, etc.) • On USB flash drive • Software download incl. license key (email address required for delivery)	6SL3070-4AA01-0XL8 6SL3070-4AA01-0XY8

¹⁾ See Software Update Service section.

DCB Extension

With DCB Extension, additional libraries can be added as specifically programmed blocks to the standard block library at SINAMICS S120/S150/S220/G130/G150/G210/G210X/G220/MV drive systems and SIMATIC Drive Controller. As a result, complex tasks can be implemented in the drive and the internal know-how protection can be increased as a Black Box. These blocks or libraries are programmed with the separate SINAMICS DCB Studio development tool in the C/C++ high-level language and can be used as a DCB Extension library for SINAMICS DCC. A SINAMICS Drive software option license is required to use these blocks from the DCB extension libraries. The selection of the required license depends on the drive system running firmware V5.x and V6.x.

SINAMICS DCB Studio

Development tool for programming blocks that can be imported as an additional library (DCB Extension) for SINAMICS DCC in the TIA Portal (upon request).

More information

TIA Portal highlights

www.siemens.com/tiaportal


The SINAMICS DCC option package as trial version is available free on the internet at

www.siemens.com/startdrive

SINAMICS G210 standard converters

Drive system dimensioning with SIZER (integrated in TIA Selection Tool)

Overview

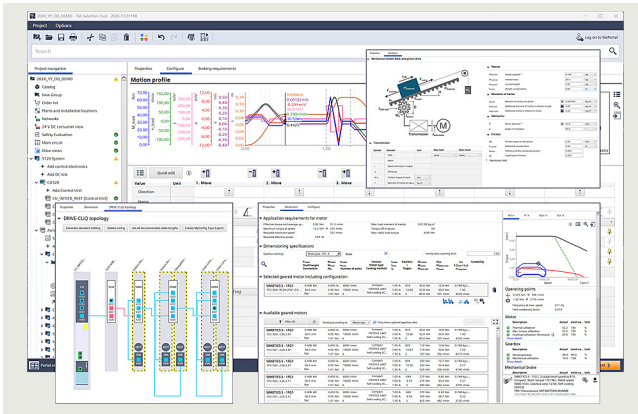

Selection guide and configurator for automation technology

Error-free configuration without expert knowledge through intelligent configurators and selection wizards. Desktop and cloud versions enable cross-team collaboration with maximum flexibility.

There are two versions of TIA Selection Tool:

- Desktop version: for downloading and executing on Microsoft Windows PCs (from Microsoft Windows 10)
- Cloud version: for running in the cloud and launching directly out of the browser (we recommend Google Chrome, Mozilla Firefox and Microsoft Edge)

Projects stored in the cloud can be edited with both tools. This makes it possible to work on-the-go using a tablet, at home on a PC – and vice versa, or together with colleagues and customers.

To use the full functionality, we recommended setting up a SiePortal account for both cases. This gives you access to prices and enables you to save your projects to our cloud.

Drive system dimensioning with SIZER integrated in TIA Selection Tool (desktop version)

SIZER provides support in the technical design of the hardware and firmware components required for a drive task. This includes the project planning of the complete drive system and enables the handling of simple individual drives to complex multi-axis applications.

The following drives and controls can be configured using the engineering tool:

- SIMOTICS motors, including servo geared motors
- SINAMICS low-voltage drive systems, including extra low-voltage drives
- SINUMERIK CNC
- SIMATIC controller
- MOTION-CONNECT connection systems
- Partner products in the field of low-voltage motors and connection systems

In addition, the integration into the TIA Selection Tool offers the selection and configuration of many other components of automation technology, thus allowing complete project planning in one tool.

SIZER supports all of the engineering steps in one workflow:

Overview (continued)

- Configuring the power supply
- Defining loads by means of mechanical systems and traversing profiles, load cycle imports or load characteristic curves
- Designing the motor and gearbox, including calculation of mechanical transmission elements
- Configuring of the drive components
- Compiling the necessary accessories
- Selecting the line-side and motor-side power options, e.g. cables, filters, and reactors

When designing SIZER, particular importance was placed on user-friendliness and a holistic, function-oriented approach to the drive application. It is easy to switch between the individual steps of the dimensioning and thus change previously made selections without discarding other inputs. Status information and messages are continuously updated and keeps you continually informed about the progress of the configuration process.

The projected drive configurations, including all inputs, are saved in projects and can be fully reloaded. The results of the engineering can be exported to project documentation.

The configuration process produces the following results:

- Parts list of the required components (export to Microsoft Excel, use of the Microsoft Excel data sheet for import into SAP)
- Technical specifications of the system
- Characteristic curves and load curves
- Arrangement of the drive and control components and dimensional drawings of the motors and converters (using separate download links)

More information

The download of the current desktop version of the TIA Selection Tool with integrated drive dimensioning as well as further information on the TIA Selection Tool can be found at www.siemens.com/tia-selection-tool

SINAMICS G210 standard converters


Drive system dimensioning with SIZER (integrated in TIA Selection Tool)

SINAMICS Drive Software

Introduction


Overview

SINAMICS Drive Software – The right function for every application

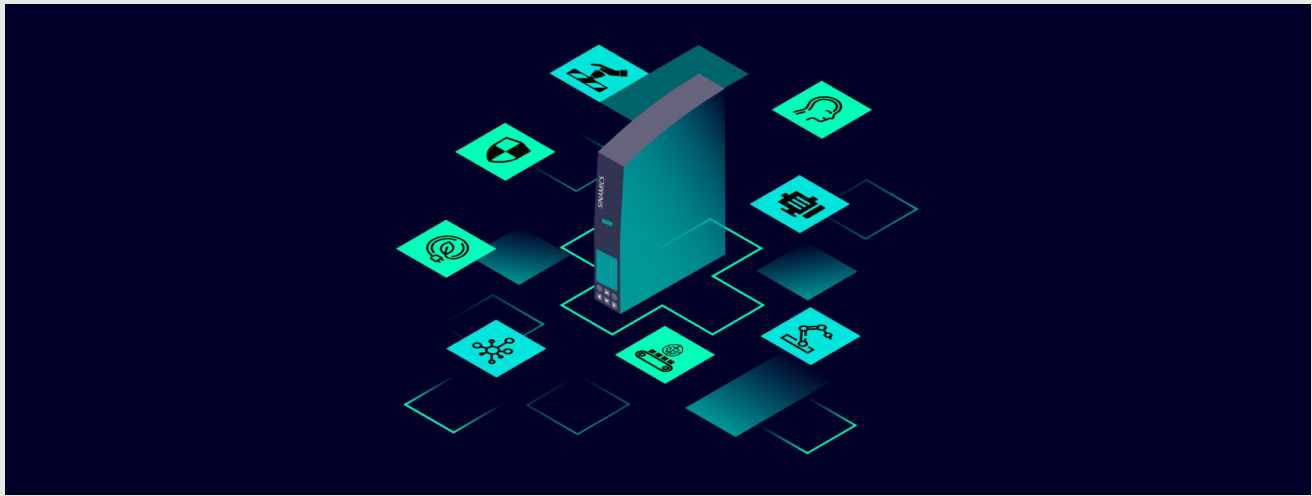

SINAMICS Drive Software ensures that our SINAMICS frequency converters of the next generation (from firmware V6.1) operate smoothly and reliably. It offers comprehensive functionality, is easily

expandable and enables the greatest possible flexibility for a wide range of applications.



Comprehensive
functionality

Comprehensive functionality

The software enables highly accurate and dynamic control of different types of motors. Integrated functions help to reduce energy consumption. The software protects the converter against overload and ensures high availability. Furthermore, positioning tasks as well as logic and technology functions can be taken over directly by the drive. Integrated functions help to reduce energy consumption. The software protects the converter against overload and ensures high availability. Furthermore, positioning tasks as well as logic and technology functions can be taken over directly by the drive.



Easily
expandable

Easily expandable


Most of the SINAMICS Drive Software functionality is already included in the basic scope of our frequency converters. However, the scope of performance can be further increased via additional SINAMICS Drive Software options. These options allow the use of special added value or expansion functions. For example, the SINAMICS Safety Integrated Extended option provides additional safety functions compared to the basic version.



Greatest flexibility

Greatest flexibility


The additional SINAMICS Drive Software options can easily be ordered together with the SINAMICS frequency converter. You do not know which options you need at the beginning? No problem, besides options that can be ordered directly at the time of purchase, some options can also be ordered later. Before purchasing, you can test the SINAMICS Drive Software options free of charge for a limited time (trial license concept).



Motor Control

Motor Control Functions

Basic – but most important! From standard pump and fan applications to high-end drives with complex multi-axis servo applications: Motor control with SINAMICS drives is always perfect. A wide variety of motor technologies and performance levels with optimal settings for all applications can be controlled. Just the perfect control for your task! Information on ordering see [SiePortal](#).



Technology

Technology Functions

The SINAMICS drives' range of applications is significantly expanded by the Technology Functions. From logic to positioning and more – everything on board! Information on ordering see [SiePortal](#).

Overview (continued)

User Experience

**User Experience**

An excellent user experience is given throughout the whole engineering chain as well as throughout the whole drives portfolio due to consistent Ethernet-based interfaces, communication protocols (wired or wireless) as well as up to date browser technologies.

All of the converter functions have been designed so that they can be handled in the same way from an engineering perspective, irrespective of the selected drive type.

Knowledge gained can therefore be reused easily and efficiently.

www.siemens.com/engineering-tools

Information on ordering see [SiePortal](#).

Safety Integrated

**Safety Integrated Functions**

SINAMICS drives offer comprehensive and integrated safety functions. These act significantly faster than conventional designs.

As a consequence, Safety Integrated further increases the safety of a machine.

www.siemens.com/safety-drives

Information on ordering see [SiePortal](#).

Security Integrated

**Security Integrated Functions**

The Security Integrated Functions for SINAMICS converters of the next generation (from firmware V6.1) increase protection against cyber attacks.

www.siemens.com/industrial-cybersecurity

Information on ordering see [SiePortal](#).

Energy Efficiency
& Grid Capability**Energy Efficiency and Grid Capability Functions**

Energy is valuable and should be used as efficiently as possible.

SINAMICS drives offer integrated functions for energy efficiency and naturally also support PROFInergy.

www.siemens.com/drives-energy-efficiency

Information on ordering see [SiePortal](#).

Connectivity

**Connectivity Functions**


Consistent openness today and tomorrow.

SINAMICS offers a comprehensive range of communication options for engineering, exchanging data between drives – and naturally for exchanging data with higher level automation systems.

www.siemens.com/profinet

Information on ordering see [SiePortal](#).

Digitalization

**Digital Drivetrain**

Getting started in drive technology digitalization is very easy. We offer suitable digitalization solutions for low-voltage motors and low-voltage converters for every phase in the life cycle of a machine or plant. Our portfolio extends from the digital to the real drive train. Thanks to continuous integration, it is possible to start today in one area with little effort – and use the information acquired elsewhere tomorrow.

www.siemens.com/digital-drives

Information on ordering see [SiePortal](#).

More information

Further information about SINAMICS Drive Software is available on the internet at:

www.siemens.com/sinamics-drive-software

For more information on ordering and configuration, see catalog D 99 and [SiePortal](#) at:


www.siemens.com/d99

www.siemens.com/sinamics-drive-software/sieportal

SINAMICS Drive Software

Introduction

Services and documentation

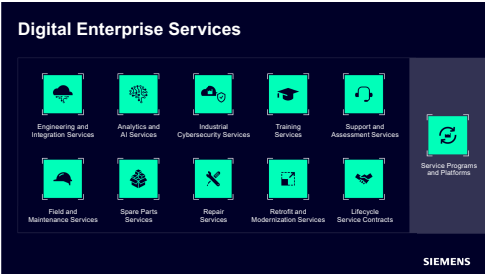

4/2	Applications
4/3	Drives Options Partner
4/4	Documentation

Services and documentation

Applications

Overview



Our understanding of an application is the customer-specific solution of an automation task based on standard hardware and software components. In this respect, industry knowledge and technological expertise are just as important as expert knowledge about how our products and systems work. We are setting ourselves this challenge with more than 280 application engineers in 20 countries.

Application Centers

We currently have Application Centers in:

- Germany: Head Office in Erlangen and in other German regions, e.g. in Munich, Nuremberg, Stuttgart, Mannheim, Frankfurt, Chemnitz, Cologne, Bielefeld, Bremen, Hanover, Hamburg
- Belgium: Brussels
- Brazil: Sao Paulo
- China: Beijing and 12 regions
- Denmark: Ballerup
- France: Paris
- Great Britain: Manchester
- India: Mumbai
- Italy: Bologna, Milan
- Japan: Tokyo, Osaka
- The Netherlands: The Hague
- Austria: Vienna
- Poland: Warsaw
- Sweden: Göteborg
- Switzerland: Zurich, Lausanne
- Spain: Madrid
- South Korea: Seoul
- Taiwan: Taipei
- Turkey: Istanbul
- USA: Atlanta

These Application Centers specialize in the use of SIMATIC/SINAMICS. You therefore can rely on automation and drive specialists for implementing successful applications. By involving your personnel at an early stage in the process, we can provide a solid basis for rapid knowledge transfer, maintenance and further development of your automation solution.

Overview (continued)

Advice on applications and implementation

We offer a variety of consultation services to help you find the optimum solution for the SIMATIC/SINAMICS application you want to implement:

The quotation phase includes

- clarification of technical questions,
- discussion of machine concepts and customer-specific solutions,
- selection of suitable technology and
- suggestions for implementation.

A technical feasibility study is also performed at the outset. In this way, difficult points of the application can be identified and solved early on. We can also configure and implement your application as a complete solution from a single source.

A large number of proven standard applications are available for use during the implementation phase. This saves engineering costs.

The system can be commissioned by experienced, competent personnel, if required. This saves time and trouble.

If servicing is required, we can support you on site or remotely. For more information about servicing, please see the section "Industry Services".

On-site application training

Training for the implemented applications can also be organized and carried out on site. This training for machine manufacturers and their customers does not deal with individual products, but the entire hardware and software system (for example, automation, drives and visualization).

From an initial concept to successful installation and commissioning: We provide complete support for SIMATIC/SINAMICS! Contact your Siemens representative.

You can find more information at

www.siemens.com/machinebuilding

Overview

Siemens Product Partners for Drives Options

Individual options for our drives


In order to meet as many customer requirements as possible in the field of drive technology, in addition to its own products, Siemens also relies on the individual and complementary services of selected partners.

We are increasingly focusing on the standard drive options, and our Siemens Product Partners for Drives Options supplement our drives with individual drive options.

This gives Siemens a unique flexibility to meet all application requirements. Naturally, we support our Siemens Product Partners for Drives Options in tailoring their options perfectly to our drives.

For you as our customer, there are multiple benefits:

- The Siemens Product Partners for Drives Options meet the same high standards of quality and performance that we place on our own products
- Drive options can be adapted to individual requirements/designs
- The Siemens Product Partners for Drives Options know our Siemens converter portfolio and can advise you individually and quickly

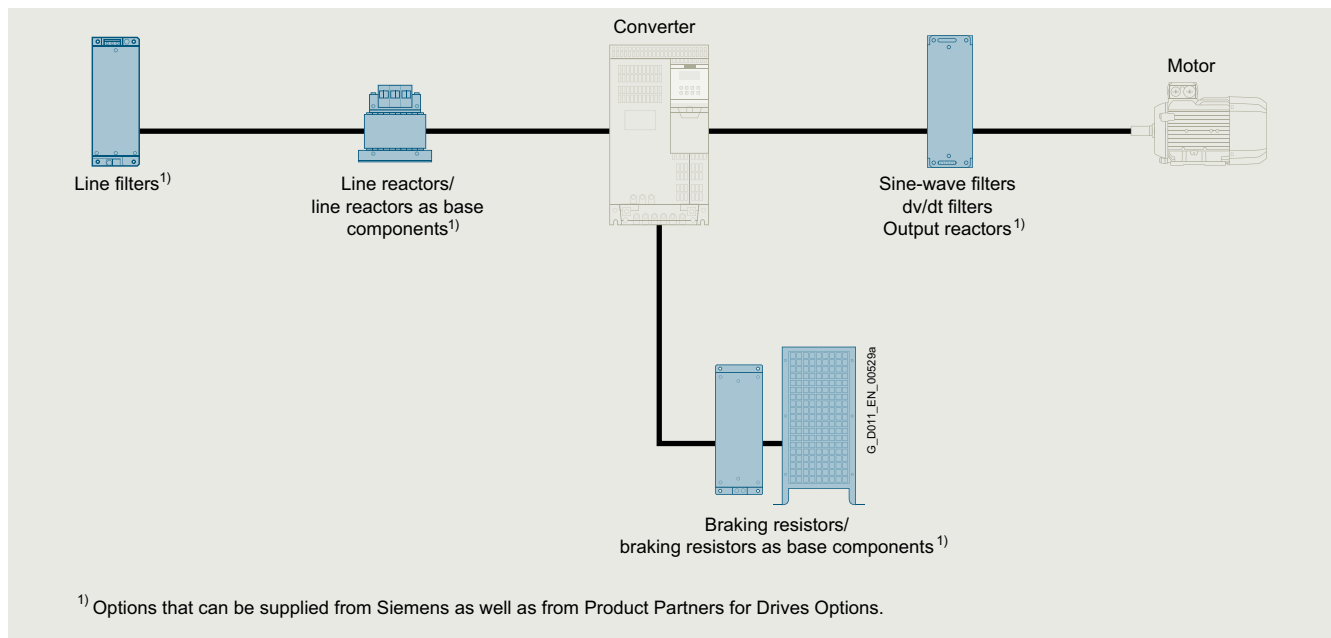

Schematic circuit diagram

More information

More information is available on the internet at
www.siemens.com/drives-options-partner

Services and documentation

Documentation

Overview

A high-quality programmable control or drive system can be used to maximum effect only if the user is aware of the performance of the products used as a result of intensive training and good technical documentation.

This is becoming more important due to the shorter innovation cycles of modern automation products and the convergence of electronics and mechanical engineering.

A comprehensive range of documentation is available which includes a Getting Started guide, operating instructions, installation manuals and a list manual.

In addition to technical information for SINUMERIK, SINAMICS and SIMOTICS, the documentation is available for downloading as a PDF file from the internet:

- SINUMERIK
<https://support.industry.siemens.com/cs/document/109766201>
- SINAMICS
<https://support.industry.siemens.com/cs/document/109807358>
- SIMOTICS
<https://support.industry.siemens.com/cs/document/109813641>

Application

Explanations of the manuals:

- **Operating Instructions**
contain all the information needed to install the device and make electrical connections, information about commissioning and a description of the converter functions.
Phases of use: Control cabinet construction, commissioning, operation, maintenance and servicing.
- **Hardware Installation Manual**
contains all relevant information about the intended use of the components of a system (technical specifications, interfaces, dimensional drawings, characteristics, or possible applications), information about installation and electrical connections and information about maintenance and servicing.
Phases of use: Control cabinet configuration/construction, maintenance and servicing.
- **Operating and Installation Instructions** (for converter and accessories)
contain all relevant information about the intended use of the components, such as technical specifications, interfaces, dimensional drawings, characteristics, or possible applications.
Phases of use: Control cabinet configuration/construction.
- **Manual/Configuration Manual**
contains all necessary information about the intended use of the components of a system, e.g. technical specifications, interfaces, dimensional drawings, characteristics, or possible applications.
Phases of use: Cabinet configuration/setup, circuit diagram configuration/drawing.
- **Commissioning Manual**
contains all information relevant to commissioning after installation and wiring. It also contains all safety and warning notices relevant to commissioning in addition to overview drawings.
Phases of use: Commissioning of components that have already been connected, configuration of system functions.
- **List Manual**
contains all parameters, function diagrams, and faults/alarms for the product/system as well as their meanings and setting options. It contains parameter data and fault/alarm descriptions with functional correlations.
Phases of use: Commissioning of components that have already been connected, configuration of system functions, fault cause/diagnosis.
- **Getting Started**
provides information about getting started for the first-time user as well as references to additional information. It contains information about the basic steps to be taken during commissioning. The information in the other documentation should be carefully observed for all of the other work required.
Phases of use: Commissioning of components that have already been connected.
- **Function Manual Drive Functions**
contains all the relevant information about individual drive functions: Description, commissioning and integration in the drive system.
Phases of use: Commissioning of components that have already been connected, configuration of system functions.

Appendix



5/2	SITRAIN
5/5	Partners
5/6	Digital Enterprise Services
5/7	Certificates of suitability (approvals)
5/9	Information on software licensing
5/11	Conditions of sale and delivery

Appendix

SITRAIN

Overview



Lern the way you like it – with SITRAIN

SITRAIN provides comprehensive technical knowledge for a wide range of industries and applications. Its offering is consistently aligned with the needs of learners and the requirements of innovative companies. Benefit from modern learning methods, personalized support, and practical knowledge that sustainably enhances your daily work and professional development. SITRAIN stands for successful, flexible, and continuous learning.

Education and training directly from the manufacturer

SITRAIN offers high-quality training covering Siemens' industrial product and solution portfolio and has more than 30 years of experience in technical training. Discover the wide range of opportunities to expand your expertise and find the course that perfectly fits your needs.




Industrial Automation Systems SIMATIC

Training available for:
SIMATIC S7-1200/S7-1500,
TIA Portal,
SIMATIC S7-300/400



Drive Technology

Training available for:
SINAMICS S120, S210,
SINAMICS G120, G220,
SINAMICS G130/G150/S150,
SINAMICS G180,
SINAMICS DCM



SINUMERIK CNC automation system

Training available for:
SINUMERIK 840D,
SINUMERIK 840D sl and
SINUMERIK ONE



Process Control Systems

Training available for:
SIMATIC PCS 7,
SIMATIC PCS neo




Digital Enterprise

Training available for:
Openness, SIMIT, OPC UA,
Industrial Edge,
virtual commissioning



Industrial Communications

Training available for:
OPC UA, PROFINET, SCALANCE,
RUGGEDOM, Industrial Ethernet,
Remote Communication



Cybersecurity

Training available for:
Industrial security for factory and
process automation,
SINEC Security Software Suite and
IT/OT security for industrial networks



Operator Control and Monitoring Systems

Training available for:
SIMATIC WinCC Unified in
TIA Portal, SIMATIC WinCC in
TIA Portal, SIMATIC WinCC V8



Motion Control

Training available for:
SIMATIC Motion Control and
SIMOTION



Smart Infrastructure

Training available for
SIRIUS, SENTRON, SIVACON, ALPHA,
SIMOCODE and circuit breakers



Process Analytics & Instrumentation

Training is available for process
analytics and instrumentation and
explosion protection



Additional training offer

Battery manufacturing,
SIMOVE with automated guided
vehicles (AGV), cranes,
guidelines and standards for
control cabinets

Overview (continued)***Different learning formats and methods for maximum learning success***

With SITRAIN trainings, you can shape your further education according to your individual preferences and the demands of your professional routine. You have the option to choose between online training and classroom courses – depending on which format suits you best.

In addition, you decide whether to complete your training flexibly on demand or attend scheduled sessions.

Whether with a learning consultant, as part of a team, or through self-paced learning – SITRAIN offers maximum flexibility and tailored options for your learning process.


Discover our three learning formats:

Learning Event

SITRAIN Learning Events are the perfect choice to achieve a defined learning goal in the shortest possible time. You learn in a protected learning environment outside of the daily work routine under the guidance of a learning consultant – virtually, in the training center, or at your company.

Learning Membership | SITRAIN access

SITRAIN access is a digital learning platform where knowledge is delivered through modular content such as tutorials, presentations, exercises, and tests. Learners benefit from a growing course offering as well as the Siemens Virtual Lab, where they can deepen their knowledge in a practical way – without the need for installation. Learn anywhere, anytime, flexibly and online.

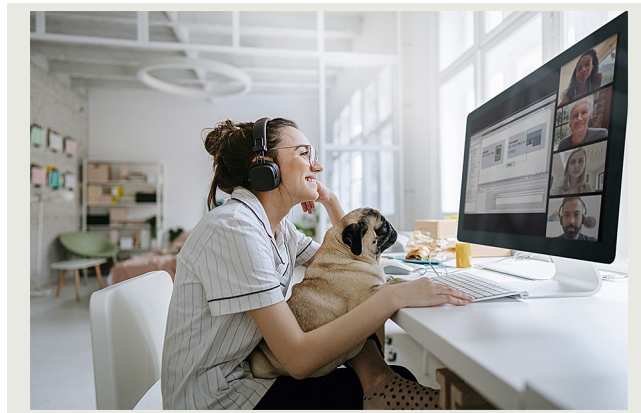
Learning Journey

The Learning Journey is the perfect combination of virtual live sessions with a learning consultant and self-learning modules for sustainable learning success. The modular approach enables an easy integration of learning into your daily work. This also includes access to the digital learning platform, SITRAIN access, for one year.

Appendix


SITRAIN

Overview (continued)




Live

Learn together with others, simultaneously and guided by a learning consultant. Online, in the SITRAIN training center or at your company.




Self-reliant

Expand your knowledge self-determined with industry learning and work on your learning units at your own pace and according to your own schedule.



On demand

Get the knowledge you need, exactly when you need it. Be it to answer a current question or to work on a special topic.



Individual

Talk directly with the learning consultant, clarify detailed questions and get personal coaching for transferring the learned topics to your own application.



More information

<https://www.siemens.com/sitrain>

Course booking


<https://sitrain.siemens.com>

Training cases

<https://www.siemens.com/sitrain-catalog-training-cases>

Overview

Partners at Siemens

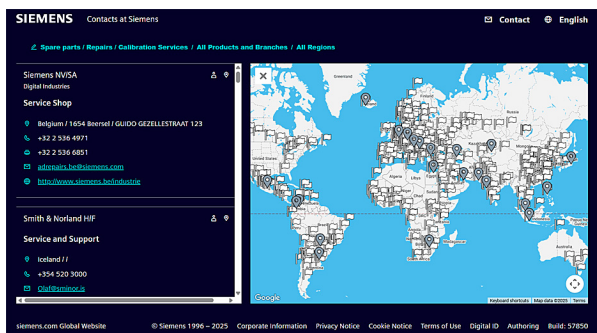

At your service locally, around the globe for consulting, sales, training, service, support, spare parts on the entire portfolio of Siemens.


Your partner can be found in our Personal Contacts Database at: www.siemens.com/automation-contact

You start by selecting the required competence, products and branches, a country and a city or by a location search or free text search.

Appendix

Digital Enterprise Services

Overview

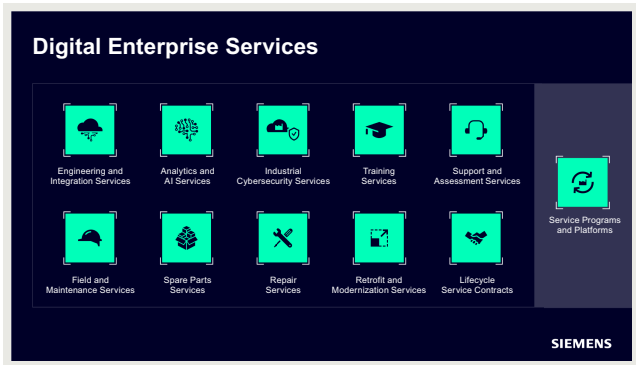

At Digital Enterprise Services, we provide you with comprehensive services throughout the entire lifecycle. From a fully digital factory to a reliable spare parts supply and quick support in the event of outages, we work with our partners to ensure your plant operates optimally – improving availability, productivity, and efficiency.

Our services take industry to the next level and give you a competitive edge:

- **Industrial Digitalization Services:**

Accelerate your digital transformation with our Digitalization Services. Our scalable offerings combine the real and digital worlds by delivering value through IT/OT solutions, improved Overall Equipment Effectiveness (OEE), advanced AI, predictive maintenance and robust cybersecurity while keeping you ahead of competition.

- **Industrial Sustainability Services:**

Our services include data-driven energy consumption analyses and measures to extend equipment lifespan. Specific savings potential is system-specific and determined individually. Siemens makes no blanket commitments regarding CO₂ reductions or the customer's sustainability targets.

- **Industrial Lifecycle and Training Services:**

Our tailored Lifecycle Services deliver expert maintenance and support worldwide, enhancing the availability and performance of your industrial assets throughout their lifecycle – from individual machines and systems to entire plants or factories. In addition, our flexible and future-oriented training offerings for all industries and applications empower you to get the most out of your investments.

For more information, please visit us at

[Industrial Digitalization Services](#)

[Industrial Sustainability Services](#)

[Industrial Lifecycle and Training Services](#)

Overview

Many of the products in this Catalog fulfill requirements, e.g. for UL, CSA or FM and are labeled with the corresponding approval designation.

All of the certificates of suitability, approvals, certificates, declarations of conformity, test certificates, e.g. CE, UL, Safety Integrated etc. have been performed with the associated system components as they are described in the Catalogs and Configuration Manuals.

The certificates are only valid if the products are used with the described system components, are installed according to the Installation Guidelines and used for their intended purpose.

In other cases, the vendor of these products is responsible for arranging for the issue of new certificates.

Test code	Tested by	Device series/ Component	Test standard	Product category/ File-No.
UL: Underwriters Laboratories Independent public testing body in North America				
     	UL according to UL standard	SINUMERIK	Standard UL 508, CSA C22.2 No. 142	NRAQ/7.E164110 NRAQ/7.E217227
	UL according to CSA standard	SIMOTION	Standard UL 508, CSA C22.2 No. 142	NRAQ/7.E164110
		SINAMICS	Standard UL 508, 508C, 61800-5-1 CSA C22.2 No. 142, 274	NRAQ/7.E164110, NMMS/2/7/8.E192450, NMMS/2/7/8.E203250, NMMS/7.E214113, NMMS/7.E253831 NMMS/2/7/8.E121068 NMMS/7.E355661 NMMS/7.E323473
	UL according to UL and CSA standards	SIMODRIVE	Standard UL 508C, CSA C22.2 No. 274	NMMS/2/7/8.E192450 NMMS/7.E214113
	UL according to UL standard	SIMOTICS	Standard UL 1004-1, 1004-6, 1004-8, CSA C22.2 No. 100	PRGY2/8.E227215 PRHZ2/8.E93429 PRHJ2/8.E342747 PRGY2/8.E253922 PRHZ2/8.E342746
		Line/motor reactors	Standard UL 508, 506, 5085-1, 5085-2, 1561, CSA C22.2 No. 14, 47, 66.1-06, 66.2-06	XQNX2/8.E257859 NMTR2/8.E219022 NMMS2/8.E333628 XPTQ2/8.E257852 XPTQ2/8.E103521 NMMS2/8.E224872 XPTQ2/8.E354316 XPTQ2/8.E198309 XQNX2/8.E475972
	UL according to CSA standard	Line filters, dv/dt filters, sine-wave filters	UL 1283, CSA C22.2 No. 8	FOKY2/8.E70122
	UL according to UL and CSA standards	Resistors	UL 508, 508C, CSA C22.2 No. 14, 274	NMTR2/8.E224314 NMMS2/8.E192450 NMTR2/8.E221095 NMTR2/8.E226619
TUV: TÜV Rheinland of North America Inc. Independent public testing body in North America, Nationally Recognized Testing Laboratory (NRTL) TÜV: TÜV SÜD Product Service Independent public testing body in Germany, Nationally Recognized Testing Laboratory (NRTL) for North America				
	TUV according to UL and CSA standards	SINAMICS	NRTL listing according to standard UL 508C	U7V 12 06 20078 013 U7 11 04 20078 009 U7 11 04 20078 010 U7 11 04 20078 011
		SIMOTION	NRTL listing according to standard UL 508	U7V 13 03 20078 01
		SIMODRIVE	NRTL listing according to standard UL 508C, CSA C22.2. No. 14	CU 72090702
		Motion Control Encoder	NRTL listing according to UL 61010-1 CSA C22.2 No. 61010-1	U8V 10 06 20196 024

Appendix

Certificates of suitability (approvals)

Overview (continued)

Test code	Tested by	Device series/ Component	Test standard	Product category/ File-No.
CSA: Canadian Standards Association Independent public testing body in Canada				
	CSA according to CSA standard	SINUMERIK	Standard CSA C22.2 No. 142	2252-01 : LR 102527
FMRC: Factory Mutual Research Corporation Independent public testing body in North America				
	FM according to FM standard	SINUMERIK	Standard FMRC 3600, FMRC 3611, FMRC 3810, ANSI/ISA S82.02.1	–
EAC: Independent public testing body within the Eurasian Conformity Area				
	EAC in accordance with the EAC Directive	SINAMICS SINUMERIK SIMOTION	Standard IEC 61800-5-1/-2, IEC 61800-3	–
RCM: Australian Communications and Media Authority Independent public testing body in Australia				
	RCM according to EMC standard	SINAMICS SINUMERIK SIMOTION	Standard IEC AS 61800-3, EN 61800-3	–
KC: National Radio Research Agency Independent public testing body in South Korea				
	KC according to EMC standard	SINAMICS SINUMERIK SIMOTION	Standard KN 11	–
BIA Federal Institute for Occupational Safety				
–	Functional safety	SINAMICS SINUMERIK SIMOTION	Standard EN 61800-5-2	–
TÜV SÜD Rail				
–	Functional safety	SINAMICS SINUMERIK SIMOTION	Standard EN 61800-5-2	–

More information about certificates can be found online at:
<https://support.industry.siemens.com/cs/ww/en/ps/cert>

Overview

Software types

Every software subject to a license is assigned to a type. The following software types are defined:

- Engineering software
- Runtime software

Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning, or servicing. Data generated with Engineering software or executable programs can be duplicated for your own use or for use by third parties free-of-charge.

Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the Runtime software or executable programs created with the Runtime software for your own use or for use by third parties is subject to a charge. You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of delivery of the Runtime software can be found in the accompanying readme files.

License types

Siemens Digital Industries and Smart Infrastructure offers different types of licenses for software:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

Floating license

The software may be installed by the licensee for internal use on any number of devices. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started. One license is required for each concurrent user.

Single license

Unlike the floating license, only one installation of the software is permitted per license. The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include, for example, per instance, per axis, per channel, etc. One single license is required for each type of use defined.

Rental license

The rental license supports the "sporadic use" of Engineering software. Once the license key has been installed, the software can be used for a defined time (the operating hours do not have to be consecutive). One license is required for each installation of the software.

Rental floating license

The rental floating license corresponds to the rental license; however, a license is not required for each installation of the software. Instead, one license per object (e.g. user or device) is required.

Overview (continued)

Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

Demo license

A demo license supports "sporadic use" of the Engineering software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license. Once the license key has been installed, the software can be used for a defined time (the operating hours do not have to be consecutive). One license is required for each installation of the software.

Demo floating license

The demo floating license corresponds to the demo license; however, a license is not required for each installation of the software. Instead, one license per object (e.g. user or device) is required.

Certificate of License (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

Available versions

Software is constantly being updated. The delivery versions

- PowerPack
- Upgrade

can be used to access these updates.

Existing bug fixes are supplied with the ServicePack delivery version.

PowerPack

PowerPacks are conversion packages used to upgrade to more powerful software.

The licensee receives a new license agreement and Certificate of License (CoL) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed. A separate PowerPack must be purchased for each original license of the software to be replaced.

Upgrade

An upgrade allows a newer, available version of the software to be used under the condition that a license for a previous version has already been acquired. The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous version, proves that the new software is licensed.

A separate upgrade must be purchased for each original license of the software to be upgraded.

ServicePack

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

License key

Siemens Digital Industries and Smart Infrastructure offers software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, floating license, etc.)

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

Software Update Service (SUS)

Within the framework of the SUS contract, you are provided with all software updates for the relevant product at no cost over a period of

Appendix

Information on software licensing

Overview (continued)

one year from the date of invoice. The contract is automatically extended by a further year unless canceled three months before expiration.

The prerequisite for agreeing to an SUS is the presence of the current version of the relevant software.

You can download information on license conditions under [this link](#).

Overview

1. General Provisions

1.1 Scope

The purchase of hardware, software, cloud services and other services (collectively "Offerings") through this catalog from Siemens Aktiengesellschaft ("Siemens") is subject to the following General Terms and Conditions for the sale of Siemens Offerings ("Catalog T&C"). These Catalog T&C apply only for orders placed with Siemens in Germany. Customer means the entity that places an order via Siemens.

1.2 Order Process

If Customer writes something in the "free choice text" (F), it is solely for Customer's internal order processing and is not reviewed or taken into consideration by Siemens and will not be legally binding.

1.3 Formation of contract

Any information provided in this catalog or in SiePortal does not constitute a binding offer and may contain errors. In particular, illustrations contained in the Offering descriptions, or in Siemens' catalogs are not binding. Any data, statement to dimensions and weights in our Offering descriptions and catalogs are subject to change without prior notice and become only binding upon contract conclusion.

An individual contract between Siemens and Customer is established when Siemens expressly accepts an order from Customer electronically or in another form, or if such acceptance does not occur, when Siemens fulfills Customer's order through delivery or performance. When the order is placed in SiePortal Siemens will send Customer an electronic confirmation of the receipt of the order, which, however, does not constitute an acceptance of the order. Neither is the Customer obligated to place an order, nor is Siemens obligated to accept any orders placed by Customer.

1.4 Additional Terms

Subordinately to these Catalog T&C, the specific terms and conditions in the text of the product description (if available) apply. If the text of the product description says that the specific terms and conditions mentioned there apply exclusively, only those specific terms and conditions apply. If the text of the product description does not contain any specific terms and conditions or if the specific terms and conditions mentioned there do not apply exclusively, the following terms and conditions apply subordinately in the version valid at the time of contract conclusion:

1.4.1 Hardware

- a. "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry ("Grüne Lieferbedingungen"-GL) "¹⁾ and
- b. the Siemens "Terms on Export Control and Electronically Order Processing "¹⁾

If the hardware contains open-source software those terms prevail over the GL, we will provide a notification with the hardware specifying the applicable terms. The same applies with respect to any third-party software components in the hardware.

1.4.2 Other Offerings than hardware

- a. for software on premise including any associated maintenance and support services: the "General Software and Cloud Supplemental Terms (AGB Germany) "²⁾ and the "Specific Supplemental Terms for on-premises Software of Infrastructure & Industry Business"²⁾;
- b. for cloud services: the "General Software and Cloud Supplemental Terms (AGB Germany) "²⁾ and the cloud services product specific terms stated in the product description;
- c. for services: the "Services Supplemental Terms (AGB Germany) "²⁾; and

Overview (continued)

- d. generally for all Offerings under a. - c.: "Base Terms Germany (AGB Germany) "²⁾.

1.5 Customers with master or frame agreement

To the extent Offerings purchased are covered by an existing master or frame agreement, the terms and conditions of that agreement shall apply instead of these Catalog T&C.

1.6 Payment agreement and data sharing

If Customer can select and selects that a payment agreement shall apply to the order, upon conclusion of the order the payment agreement will apply and prevail over these Catalog T&C.

For the assessment of financing options, Siemens shares information and data in relation to Customer's company obtained within the scope of its business relationship with its affiliates (as defined in the Base Terms Germany (AGB Germany)).

2. Prices, payment terms and price escalation

2.1 Prices

The prices are in € (Euro), EXW INCOTERMS®2020, exclusive packaging.

2.2 Taxes

All prices and expenses stated in the order are exclusive of any taxes, duties, tariffs and any other charges ("Tax"). Customer will pay or refund Siemens for any applicable Tax imposed by any government authority for Customer's use or receipt of the Offerings. If Customer is exempt from value-added or sales tax, or similar taxes, it must provide a valid, timely, and executed exemption certificate, direct pay permit, or other such government-approved documentation.

If Customer is required by law to deduct or withhold Tax, Customer will increase the amount it pays to Siemens so that Siemens still receives the amount originally invoiced. Customer will promptly provide all tax receipts confirming it has paid Tax or has withheld Tax.

2.3 Price escalation

2.3.1 Price escalation for metal surcharges

To account for fluctuations commodity prices (silver, copper, aluminum, lead, gold, dysprosium and/or neodymium), surcharges will apply to Offerings containing these metals. Surcharges are calculated daily using the Offering's Metal Factor, which defines the applicable commodity and pricing methods. Details are provided in the exhibit "Metal surcharges "³⁾. The surcharges calculated by using these pricing methods will be added to the Offering's price.

If applicable, the Metal Factor is shown with the Offering's price information or listed on SiePortal (<https://sieportal.siemens.com>).

2.3.2 General price escalation

If, between ordering and delivery, there are any new or modified taxes, duties, tariffs, or equivalent measures that are directly or indirectly applicable to Siemens' offering, including any hardware, software, or service components contained therein, or a price increase of more than 20% for relevant commodities (e.g. electronic components, semiconductors) applies, Siemens reserves the right to adjust the price accordingly.

2.4 Price Changes

Prices stated in the SiePortal or in Siemens' catalogs are subject to change without prior notice.

3. Units of measurement and weight

The dimensions and weight of all Offerings are given in meters and kilograms. If the dimensions or weight of the Offerings are specified in other units of measurement, such as inches or pounds, this indicates that these Offerings are intended for export.

¹⁾ Download under www.siemens.com/sts-base-terms-deu

²⁾ Download under www.siemens.com/sts-st-deu


³⁾ Download under [this link](#)

Appendix

Conditions of sale and delivery

Selection and ordering at Siemens

SiePortal – Ordering products and downloading catalogs

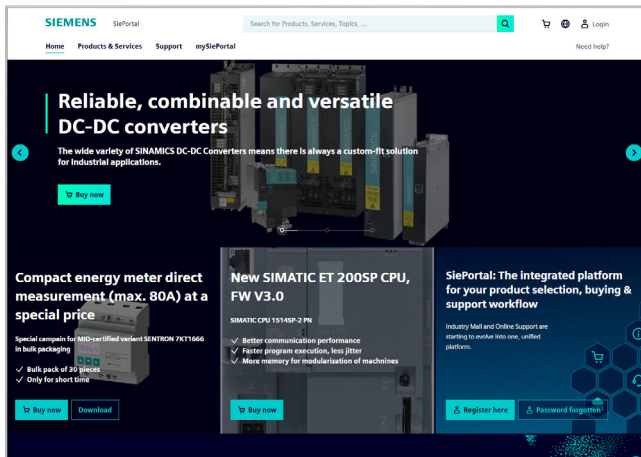

Easy product selection and ordering with SiePortal


SiePortal > Products & Services

The internet ordering platform of Siemens AG is located in SiePortal. It provides you with online access to a comprehensive product spectrum that is presented in an informative, well-organized way.

Powerful search functions help you select the required products, while configurators enable you to configure complex product and system components quickly and easily. CAX data are also available for you to use.

Data transfer allows the entire procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, individual customer discounting, and quotation preparation are also possible.

<https://sieportal.siemens.com>

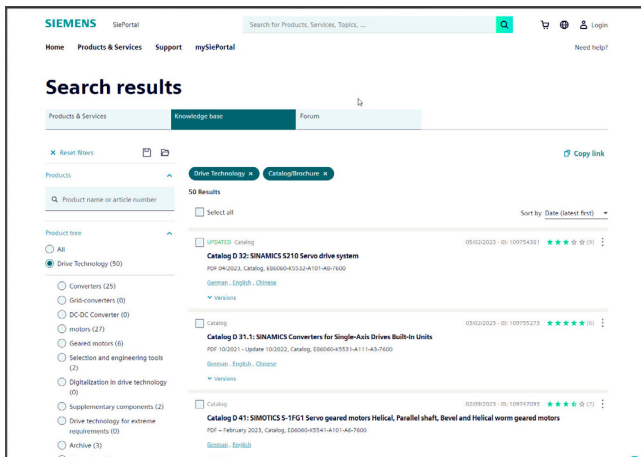

Downloading catalogs

SiePortal > Support > Knowledge base

You can download catalogs and brochures in PDF format from Siemens Industry Online Support without having to register.

The filter box makes it possible to perform targeted searches.

<https://sieportal.siemens.com>

Cybersecurity information

Siemens provides products and solutions with industrial cybersecurity functions that support the secure operation of plants, systems, machines and networks.

In order to protect plants, systems, machines and networks against cyber threats, it is necessary to implement – and continuously maintain – a holistic, state-of-the-art industrial cybersecurity concept. Siemens' products and solutions constitute one element of such a concept.

Customers are responsible for preventing unauthorized access to their plants, systems, machines and networks. Such systems, machines and components should only be connected to an enterprise network or the internet if and to the extent such a connection is necessary and only when appropriate security measures (e.g. firewalls and/or network segmentation) are in place.

For additional information on industrial cybersecurity measures that may be implemented, please visit www.siemens.com/cybersecurity-industry

Siemens' products and solutions undergo continuous development to make them more secure. Siemens strongly recommends that product updates are applied as soon as they are available and that the latest product versions are used. Use of product versions that are no longer supported, and failure to apply the latest updates may increase customer's exposure to cyber threats.

To stay informed about product updates, subscribe to the Siemens Industrial Cybersecurity RSS Feed under www.siemens.com/cert

Get more information

SINAMICS G210 standard converters:
www.siemens.com/sinamics-g210

SIMOTICS motors for industry:
www.siemens.com/simotics

Motion Control Systems and Solutions for production machine and machine tool equipment:
www.siemens.com/motioncontrol

Local partners worldwide:
www.siemens.com/automation-contact

Published by
Siemens AG

Digital Industries
Motion Control
Postfach 31 80
91050 Erlangen, Germany

For the U.S. published by
Siemens Industry Inc.

100 Technology Drive
Alpharetta, GA 30005
United States

PDF (Article No. E86060-K5536-A131-A1-7600)
KG 0826 En
Produced in Germany
© Siemens 2026

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

All product designations may be trademarks or product names of Siemens AG or other companies whose use by third parties for their own purposes could violate the rights of the owners.